



# Alphabet of light system - Suspension - Curved - 45° - 3500K - Terminal Right - Not powered

BIG - Bjarke Ingels Group

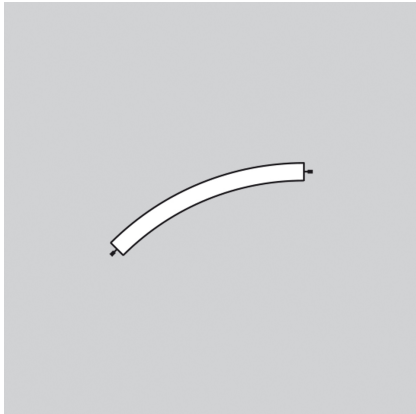

IP20   CE Dimmerable: 



## LUMINAIRE

- Watt: **11W**
- Delivered lumens output: **979lm**
- CCT: **3500K**
- Efficiency: **79%**
- Efficacy: **89.03lm/W**
- CRI: **80**
- Dimmable Typology: **Push & APP, Push/DALI**

## Notes

Max 10 m for each power unit (10 m in one direction or 5 m in both directions).  
Ceiling rose with power supply for each group. (depending on the power supply chosen, the product could be APP Compatible). DALI dimming possible for the entire system or for groups of modules powered by the same driver.

## DESCRIPTION

Alphabet of light system is a lighting language that continues to grow with new curved elements so it can be developed with increasing freedom throughout space. It is a basic principle that generates an open system implementing just a handful of basic modules. Thanks to specific geometric proportions, these modules can be combined together to form endless lighting structures, from the most elemental to the most complex, both linear and curved. The BIG idea is combined with Artemide's optoelectronic expertise to give rise to an innovative construction principle that casts continuous and comfortable light. It is a minimal presence that conceals ultra-sophisticated optoelectronic and patented mechanical innovation as well as ground-breaking control. The system can be controlled using the Artemide App to create freedom both in geometric design and in the definition of dynamic performance levels, which can be programmed or modified in real time.

## PRODUCT CODE: 2116C10A

## FEATURES

- Article Code: **2116C10A**
- Colour: **White**
- Installation: **Suspension**
- Material: **Methacrylate, aluminum**
- Series: **Design Collection, Architectural Indoor**
- Environment: **Indoor**
- design by: **BIG - Bjarke Ingels Group**

## SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **8W**
- Color Tolerance: **MacAdam 3SDCM**
- Service Life: **L80 (12K) 72000h**

Accessories



45° curve - 45° curve joint (N°4)  
2255010A



Lengthening - Length 1.25 meters  
2274010A



Lengthening - Length 2.50 meters  
2275010A



60° curve - 45° curve S joint (N°8)  
2257010A



45° curve - 60° curve S joint (N°16)  
2258010A



60° curve right - 60° curve right joint (N°18)  
2270010A



45° curve left - 45° curve left S joint (N°9)  
2260010A



60°/45° curve left - 45°/60° curve right joint  
(N°11)  
2261010A



60°/45° curve right - 45°/60° curve left joint (N°12)  
2262010A



Linear - curve 45° right joint (N°2)  
2251010A



Rose/Power Supply - Suspension - Remote  
2272010A



Rose/Power Supply - Suspension - Remote - APP  
Compatible  
2272010APP



Suspension Kit - Length 4 meters  
2273010A



Suspension Kit - Length 1.5 meters  
2266010A