


Cata TIR Track - 3000K + Lens 16°

Carlotta de Bevilacqua



IP20  Dimmerable: +0-

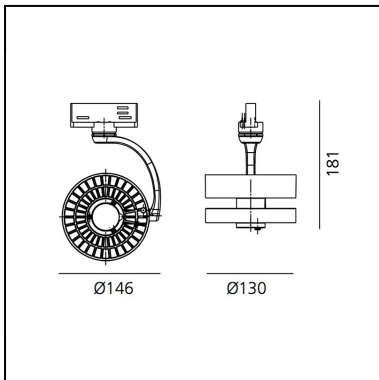

LUMINAIRE

- Watt: **22W**
- Delivered lumen output: **1638lm**
- CCT: **3000K**
- Efficiency: **90%**
- Efficacy: **74.47lm/W**
- CRI: **90**

Notes

If there is no DALI-SwitchDim bus, the luminaire can be dimmed using the button on the device

DESCRIPTION

Interchangeable optical unit through a 'twist & lock' mechanism. Defined, concentrated light beams thanks to an innovative collimation system. Excellent quality of light: Cata Tuneable White: adjustable colour temperature from 2700K to 5700K CRI >93 (min.) Cata Stable White: available as warm white (3000K) and neutral white (4000K) – CRI=80 (min.). Rotation of 360°, tilt angle of +90°/-90° 2 installation options: with adaptor for 3-circuit track, or base plate for ceiling mounting. Ultra-flat power source (8mm height): DALI dimmable as standard, DALI8 interface hub for Tuneable White version. Materials : optic in transparent and metallic polycarbonate, heat sink in die-cast gloss aluminium, feeder/power supply in transparent polycarbonate, arm in die-cast gloss aluminium. Complies with standard EN60598-

FEATURES

- Product Code: **M0569W83 + M109600**
- Colour: **Polished aluminium**
- Installation: **Track**
- Series: **Architectural Indoor**
- design by: **Carlotta de Bevilacqua**

DIMENSIONS

- Height: **181 mm**
- Diameter: **130 mm**
- Base Diameter: **130 mm**
- Inclination: **-90+90**
- Rotation: **360°**
- Weight: **kg 0.85**

SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **22W**
- Color temperature (K): **3000K**
- CRI: **90**
- Color Tolerance: **MacAdam 2SDCM**
- Service Life: **L70(6K) 36000h**

Accessories



Accessories holder M057080



Adjustable dowsers M059910



Lens for elliptical emission M282007



Chromatic filter yellow M281745



Chromatic filter red M281755



Chromatic filter blue M281735



Anti-dazzle louvre M282100



Soft filter M056807