



# Dedalo - IP40 - 240 LED RGB

Studio Artemide

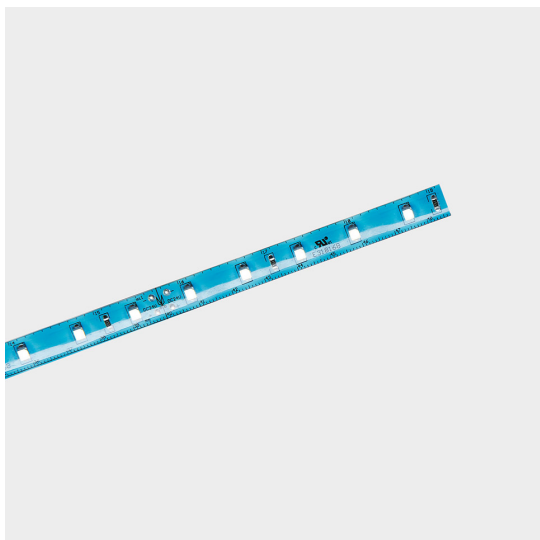

IP40  

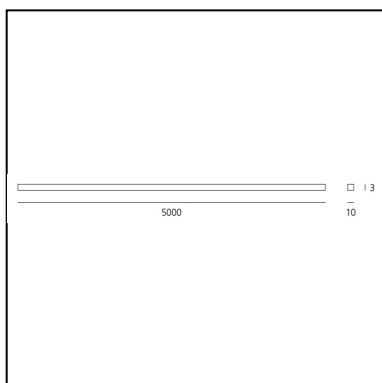

## LUMINAIRE

- Power Supply: **Electronic supplied separately**
- Watt: **60W**
- CCT: **RGB**
- CRI: **80**

## Notes

Divisible every 62,5 mm

## DESCRIPTION

Light fixture with high-performance LED light sources. Ceiling, wall or floor installation.

Flexible profile.

Flexible UV-resistant polyurethane resin rim.

Accurate led selection equal to 3-Step MacAdam, ensuring colour consistency.

Remote driver.

3M adhesive film to fix the product, supplied with the fixture.

Electrical connection to the driver by means of H05RN-F (IP65) or FEP-FEP cable (IP40), and appropriate terminal board, provided with the fixture.

RGB Full color LED.

Operating temperature -20°C / +40°C.

Technical features of light fixtures in compliance with EN60598- 1.

**PRODUCT CODE: NL17036**

## FEATURES

- Article Code: **NL17036**
- Installation: **FloorWallCeiling**
- Series: **Architectural Outdoor**
- Environment: **Outdoor**
- design by: **Studio Artemide**

## DIMENSIONS

- Length: **cm 500**
- Width: **cm 1.2**
- Height: **cm 0.3**
- Weight: **kg 0.5**

## SOURCES INCLUDED

- Category: **Led RGB**
- Number: **1**
- Watt: **60W**

**Accessories**

NO  
IMAGE  
AVAILABLE

Driver NLX1-75 - 144W - 24Vdc PWM - DMX/DALI -  
153x50x23(LxWxH) - IP40 NL19084

NO  
IMAGE  
AVAILABLE

Driver NLX1-100 - 120-250Vac - 95W - 24Vdc PWM -  
DMX/DALI - 388x42x30(LxWxH)- IP40 NL12150

NO  
IMAGE  
AVAILABLE

50cm-long cable with HE10 connector for  
connection to a keyboard NL7833

NO  
IMAGE  
AVAILABLE

Driver 150W - 100-277 Vac - 12Vdc - 228x68x39  
(LxWxH) - IP67 DV1043

NO  
IMAGE  
AVAILABLE

DSC30 interfaccia USB - DMX stand alone  
microled NL19030

NO  
IMAGE  
AVAILABLE

Alimentatore 9V/350mA con connettore mini USB  
per DSC30 NL19031