



# Dedalo - IP65 - 300 LED

Studio Artemide

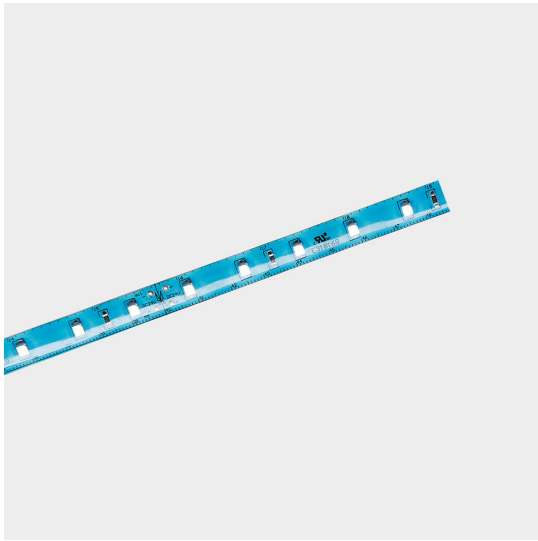

IP65   Dimmerable: 

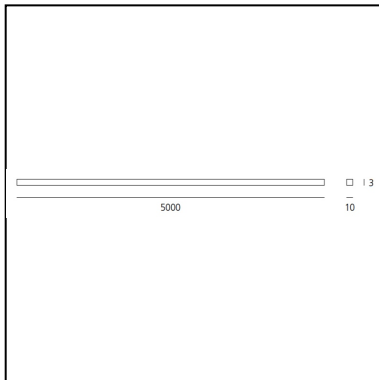

## LUMINAIRE

- Power Supply: **Electronic supplied separately**
- Watt: **24W**
- Delivered lumens output: **1104lm**
- CCT: **3000K**
- Efficacy: **46lm/W**
- CRI: **80**

## Notes

Divisible every 100 mm

## DESCRIPTION

Light fixture with high-performance LED light sources. Ceiling, wall or floor installation.

Flexible profile.

Flexible UV-resistant polyurethane resin rim.

Accurate led selection equal to 3-Step MacAdam, ensuring colour consistency.

Remote driver.

3M adhesive film to fix the product, supplied with the fixture.

Electrical connection to the driver by means of H05RN-F (IP65) or FEP-FEP cable (IP40), and appropriate terminal board, provided with the fixture.

RGB Full color LED.

Operating temperature -20°C / +40°C.

Technical features of light fixtures in compliance with EN60598- 1.

**PRODUCT CODE: NL17034VTK0**

## FEATURES

- Article Code: **NL17034VTK0**
- Installation: **FloorWallCeiling**
- Series: **Architectural Outdoor**
- Environment: **Outdoor**
- design by: **Studio Artemide**

## DIMENSIONS

- Length: **cm 500**
- Width: **cm 1.2**
- Height: **cm 0.3**
- Weight: **kg 0.4**

## SOURCES INCLUDED

- Category: **Led**
- Number: **1**
- Watt: **24W**
- Delivered lumens output: **1104lm**
- Color temperature (K): **3000K**
- CRI: **CRI = 80(min)**

**Accessories**

NO  
IMAGE  
AVAILABLE

DRIVER 90W 24V DC T409999

NO  
IMAGE  
AVAILABLE

Driver cv 150W 24Vdc DV5004

NO  
IMAGE  
AVAILABLE

Connection Kit (1 male - 2 female) NL170330

NO  
IMAGE  
AVAILABLE

Driver - 288W - 24Vdc - IP20 - 156x52x26 (LxWxH) -  
DALI/Push/1-10/0-10 NL19096

NO  
IMAGE  
AVAILABLE

DRIVER 60W 24V DC T409998