



Discovery Vertical 70 White Violet Integralis - Satinized aluminium - App Compatible

Ernesto Gismondi

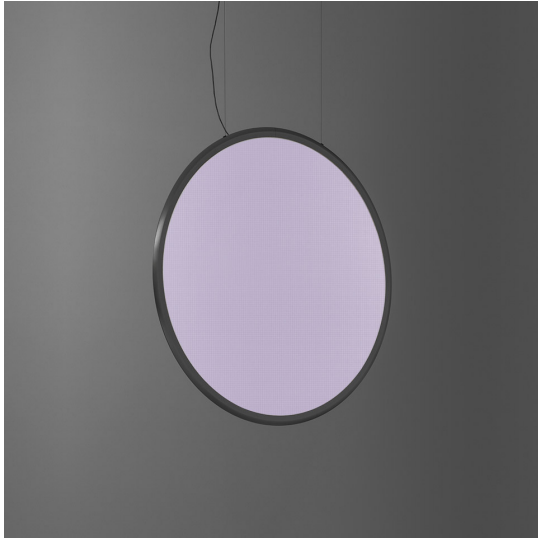

IP20    Dimmerable: 

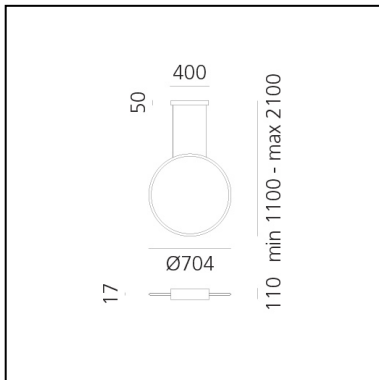

LUMINAIRE

DAY MODE

- Watt: **42W**
- Voltage: **220V - 240V**
- Delivered lumen output: **1852lm**
- Radiant Flux: **1124mW**
- CCT: **2700K**
- Efficacy: **44lm/W**
- CRI: **80**
- Dimmable Typology: **APP**

DESCRIPTION

Discovery is an unobtrusive, utterly absent and immaterial element. Its volume is only perceived when switched on, thanks to the light that outlines the central emitting surface. The result is a uniform light, ideal for working environments. The company's great optoelectronic skills, combined with a thorough culture of design and with technological know-how, produces a perfectly all-purpose and surprising solution, which translates innovation into emotional perception. In the version WHITE-VIOLET INTEGRALIS, Artemide App compatible, Discovery is designed in two operating modes: Day, with white light performance for a microbial growth control, and Night, with a violet light emission for a faster reduction of the bacterial load, in particular for photosensitive pathogenic bacteria.

FEATURES

- Product Code: **1992210IN1APP**
- Colour: **Satinized aluminium**
- Installation: **Suspension**
- Material: **Technopolymer, aluminium**
- Series: **Design Collection**
- Environment: **Indoor**
- design by: **Ernesto Gismondi**

DIMENSIONS

- Width: **17 mm**
- Diameter: **704 mm**
- Base Length: **400 mm**
- Max Height from ceiling: **2100 mm**

SOURCES INCLUDED

- Category: **Dual Channel LED**
- Number: **1**
- CRI: **80**
- Color Tolerance: **3SDCM**
- Channel 1 Service Life: **L70 B50 60000h**
- Channel 2 Service Life: **L70 B50 20000h**

NIGHT MODE

- Power Supply: **220V - 240V**
- Watt: **42W**
- Delivered lumen output: **19lm**
- Radiant Flux: **3406mW**
- Dimmable Typology: **APP**

Accessories

Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes. DV1080APP