


## Luminaire

Code BB12005\_50+M239200  
Name LUCERI Q TRIM 50W 930 MIRROR + schermo trasparente


## Measurem.

Code FTS1801213-A  
Name LUCERI Q TRIM 50W 930 MIRROR + schermo trasparente

Luminaire Flux	4539 lm	Luminaire Power	50.0 W	Efficacy	90.780 lm/W	Efficiency	100.00%
Source Flux	4539 lm	Maximum value	1073.64 cd/klm	Position	C=0.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	184 mm	Width	184 mm	Height	0 mm
Horizontal Luminous Area		0.033856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008191 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4539 lm	
LED Flux=6047lm LED Power=50W Eff=75% EfcLed=121lm/W EfcLum=91lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	93 99 100 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	

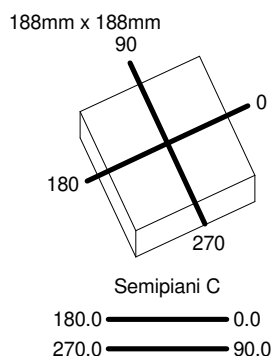

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

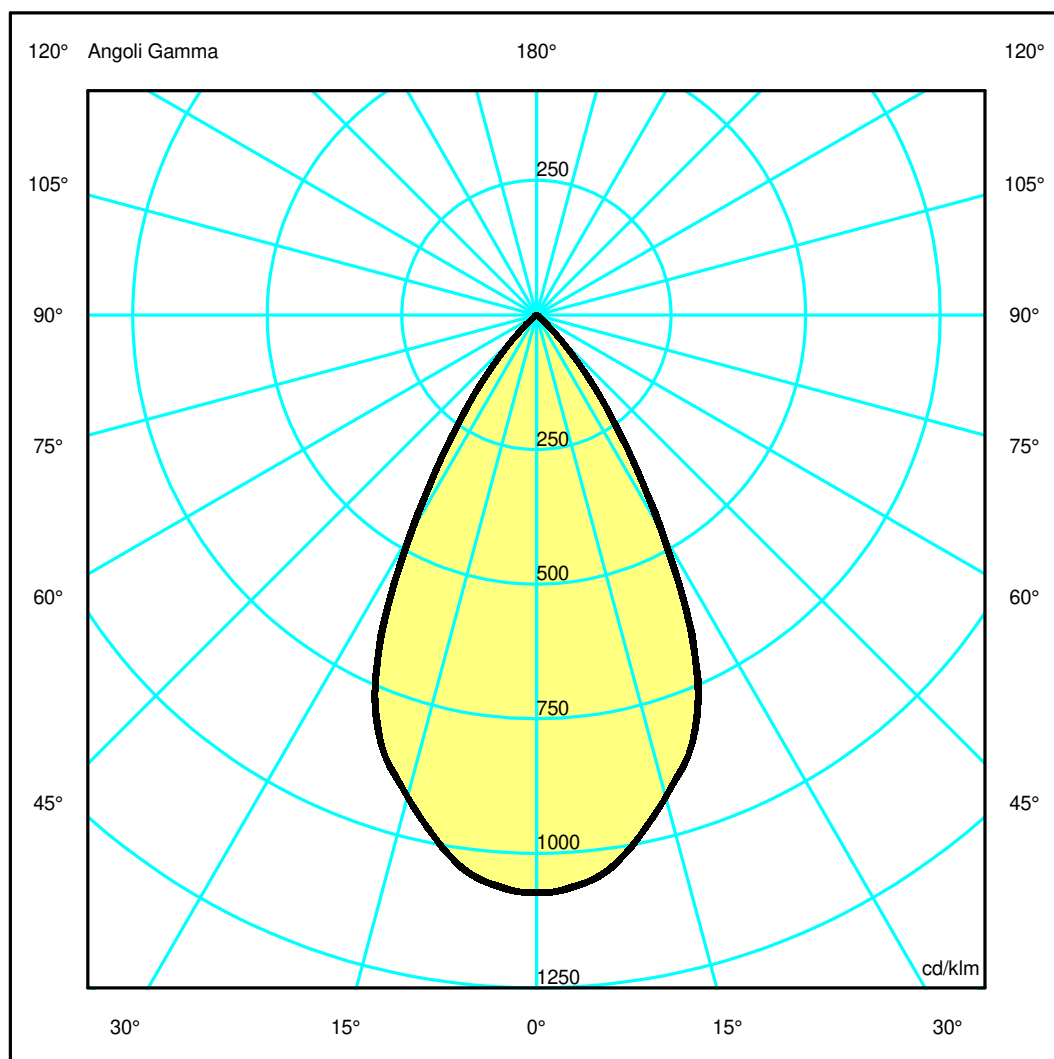

## Luminaire

Code BB12005\_50+M239200  
Name LUCERI Q TRIM 50W 930 MIRROR + schermo trasparente

## Measurem.


Code FTS1801213-A  
Name LUCERI Q TRIM 50W 930 MIRROR + schermo trasparente

Luminaire Flux	4539 lm	Luminaire Power	50.0 W	Efficacy	90.780 lm/W	Efficiency	100.00%
Source Flux	4539 lm	Maximum value	1073.64 cd/klm	Position	C=0.00 G=1.00	CG Double Symmetrical	
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	184 mm	Width	184 mm	Height	0 mm
Horizontal Luminous Area		0.033856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008191 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4539 lm	
LED Flux=6047lm LED Power=50W Eff=75% EfcLed=121lm/W EfcLum=91lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	93 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.54	1.08	1.62	2.17	2.71	OC	0.54	1.09	1.63	2.18	2.72
OB	0.54	1.08	1.62	2.17	2.71	OD	0.54	1.09	1.63	2.18	2.72

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4868.95	4804.87	4206.30	3149.63	1220.18	242.21	28.20	17.59	12.42	6.49
OB	4868.95	4804.87	4206.30	3149.63	1220.18	242.21	28.20	17.59	12.42	6.49
OC	4868.95	4799.17	4207.76	3167.82	1250.96	257.17	30.47	18.68	12.79	6.25
OD	4868.95	4799.17	4207.76	3167.82	1250.96	257.17	30.47	18.68	12.79	6.25

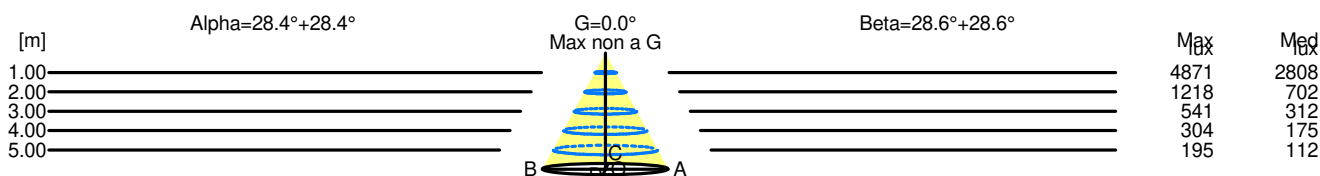

H[m]	D[m]	Max lux	Med lux	Alpha=28.4°+28.4°	G=0.0 Max non a G
1.00	1.08	4871	2808		
2.00	2.17	1218	702		
3.00	3.25	541	312		
4.00	4.33	304	175		
5.00	5.41	195	112		

H[m]	D[m]	Max lux	Med lux	Beta=28.6°+28.6°	G=0.0 Max non a G
1.00	1.09	4871	2808		
2.00	2.18	1218	702		
3.00	3.27	541	312		
4.00	4.36	304	175		
5.00	5.45	195	112		