


Luminaire

Code FT71004
Name I FUNIVIA OUT 930 NRO
Measurement.
Code FTS2500082
Name I FUNIVIA OUT 930 NRO

Luminaire Flux	1056 lm	Luminaire Power	15.0 W	Efficacy	70.400 lm/W	Efficiency	100.00%
Source Flux	1056 lm	Maximum value	381.36 cd/klm	Position	C=190.00 G=1.00	CG Asymmetrical	
Rectangular Luminaire		Length	1335 mm	Width	27 mm	Height	25 mm
Rectangular Luminous Area		Length	1227 mm	Width	13 mm	Height	0 mm
Horizontal Luminous Area		0.015951 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003859 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		11-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1056 lm	
LED Flux=1978lm LED Power=14W Eff=53% EfcLed=141lm/W EfcLum=70lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(7k)=40000h							
C.I.E.	51 85 98 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		


1335mm x 27mm



Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

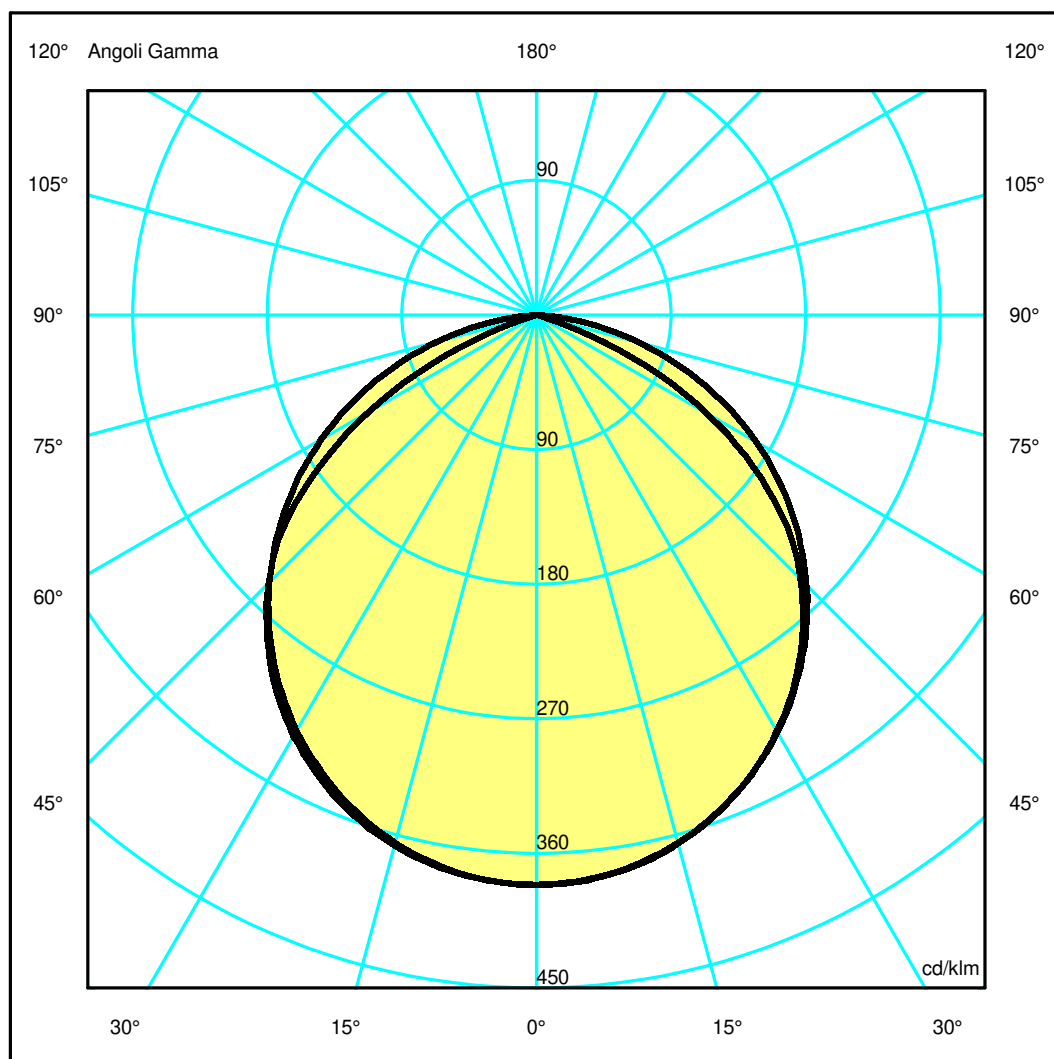

Luminaire

Code FT71004
Name I FUNIVIA OUT 930 NRO

Measurem.


Code FTS2500082
Name I FUNIVIA OUT 930 NRO

Luminaire Flux	1056 lm	Luminaire Power	15.0 W	Efficacy	70.400 lm/W	Efficiency	100.00%
Source Flux	1056 lm	Maximum value	381.36 cd/klm	Position	C=190.00 G=1.00	CG Asymmetrical	
Rectangular Luminaire		Length	1335 mm	Width	27 mm	Height	25 mm
Rectangular Luminous Area		Length	1227 mm	Width	13 mm	Height	0 mm
Horizontal Luminous Area		0.015951 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003859 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		11-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1056 lm	
LED Flux=1978lm LED Power=14W Eff=53% EfcLed=141lm/W EfcLum=70lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(7k)=40000h							
C.I.E.	51 85 98 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.35	2.69	4.04	5.39	6.73	OC	1.51	3.03	4.54	6.05	7.56
OB	1.36	2.71	4.07	5.42	6.78	OD	1.49	2.98	4.47	5.96	7.44

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	402.23	400.14	385.77	358.25	317.41	263.49	186.39	85.77	1.75	1.01
OB	402.23	400.81	387.63	361.23	321.48	267.51	187.32	80.83	1.66	1.01
OC	402.23	401.07	386.24	358.87	318.75	269.51	211.44	145.31	75.21	14.38
OD	402.23	400.42	385.92	357.39	317.57	266.86	207.66	141.21	72.55	13.39

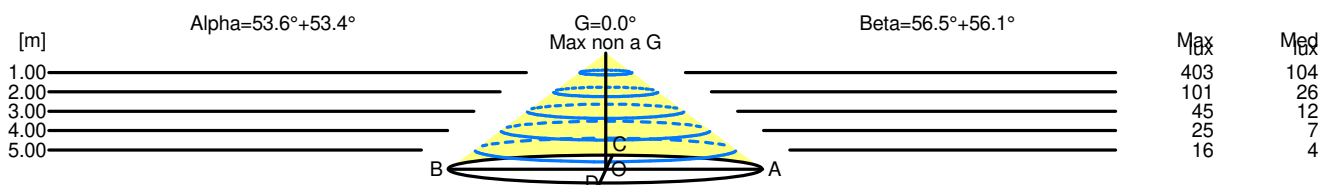

H[m]	D[m]	Max lux	Med lux	Alpha=53.6°+53.4°	G=0.0 Max non a G	
1.00	2.70	403	104			
2.00	5.41	101	26			
3.00	8.11	45	12			
4.00	10.81	25	7			
5.00	13.51	16	4			

H[m]	D[m]	Max lux	Med lux	Beta=56.1°+56.5°	G=0.0 Max non a G	
1.00	3.00	403	104			
2.00	6.00	101	26			
3.00	9.01	45	12			
4.00	12.01	25	7			
5.00	15.01	16	4			