

Luminaire

Code BQ81104+AP91300
Name VECTOR 40 WALL SWITCH 927 SP BLK + SOFT FILTER

Measurem.

Code FTS2300030
Name VECTOR 40 WALL SWITCH 927 SP BLK + SOFT FILTER

| | | | | | | | |
|---|--------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 370 lm | Luminaire Power | 8.5 W | Efficacy | 43.504 lm/W | Efficiency | 100.00% |
| Source Flux | 370 lm | Maximum value | 5632.00 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.000573 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000139 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 08-11-2022 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 370 lm | |
| LED Flux=571lm LED Power=6W Eff=65% EfcLed=89lm/W EfcLum=44lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 98 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Diam=40mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

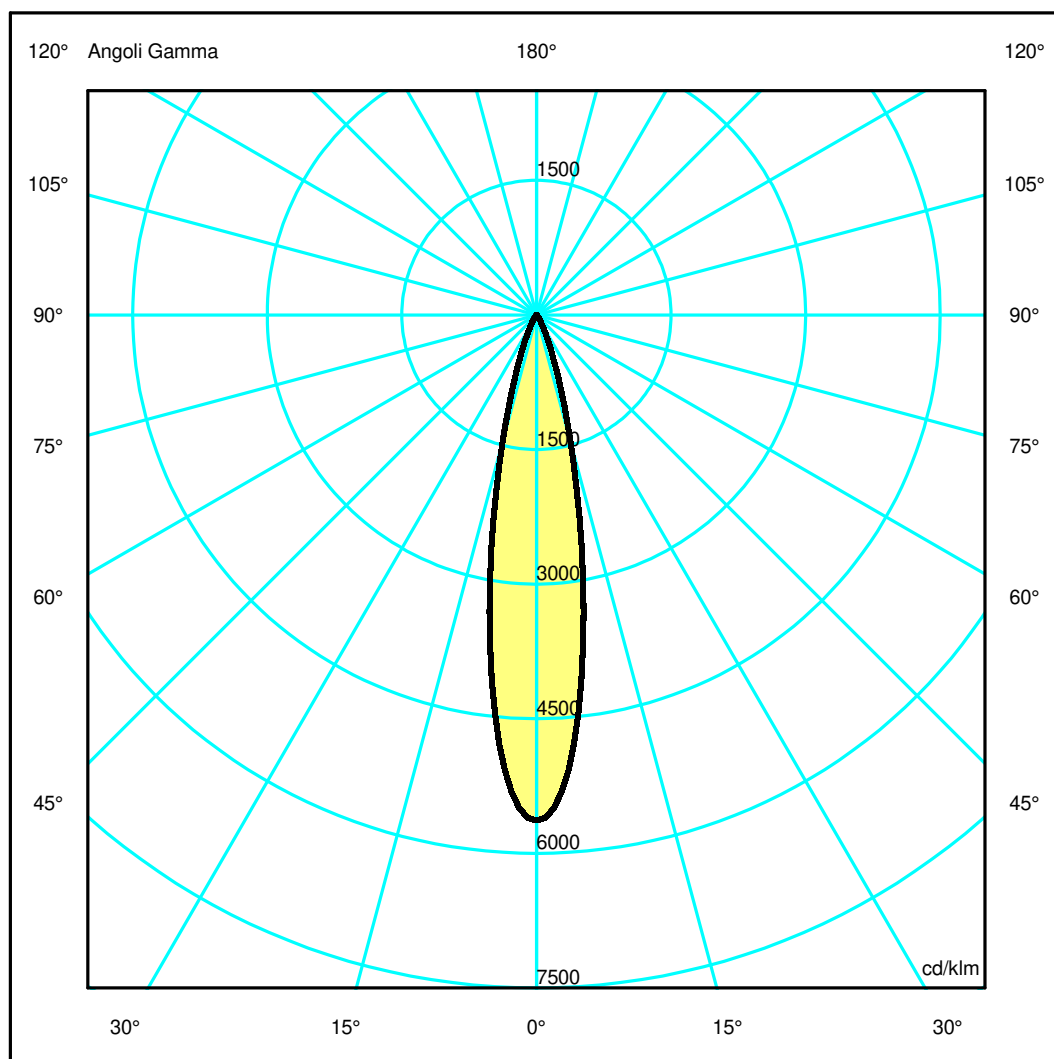

Luminaire

Code BQ81104+AP91300
Name VECTOR 40 WALL SWITCH 927 SP BLK + SOFT FILTER

Measurement


Code FTS2300030
Name VECTOR 40 WALL SWITCH 927 SP BLK + SOFT FILTER

| | | | | | | | |
|---|--------|-----------------|----------------|-----------------------------|---------------|--------------------|---------|
| Luminaire Flux | 370 lm | Luminaire Power | 8.5 W | Efficacy | 43.504 lm/W | Efficiency | 100.00% |
| Source Flux | 370 lm | Maximum value | 5632.00 cd/klm | Position | C=0.00 G=0.00 | CG Rotosymmetrical | |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.000573 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000139 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 08-11-2022 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 370 lm | |
| LED Flux=571lm LED Power=6W Eff=65% EfcLed=89lm/W EfcLum=44lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 98 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.18 | 0.37 | 0.55 | 0.74 | 0.92 | OC | 0.18 | 0.37 | 0.55 | 0.74 | 0.92 |
| OB | 0.18 | 0.37 | 0.55 | 0.74 | 0.92 | OD | 0.18 | 0.37 | 0.55 | 0.74 | 0.92 |

| | | | | | | | | | | |
|----|--------------------------------|---------|--------|-------|-------|------|------|------|------|------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 2082.60 | 1773.18 | 539.83 | 97.75 | 20.10 | 5.39 | 1.92 | 1.05 | 0.51 | 0.20 |
| OB | 2082.60 | 1773.18 | 539.83 | 97.75 | 20.10 | 5.39 | 1.92 | 1.05 | 0.51 | 0.20 |
| OC | 2082.60 | 1773.18 | 539.83 | 97.75 | 20.10 | 5.39 | 1.92 | 1.05 | 0.51 | 0.20 |
| OD | 2082.60 | 1773.18 | 539.83 | 97.75 | 20.10 | 5.39 | 1.92 | 1.05 | 0.51 | 0.20 |

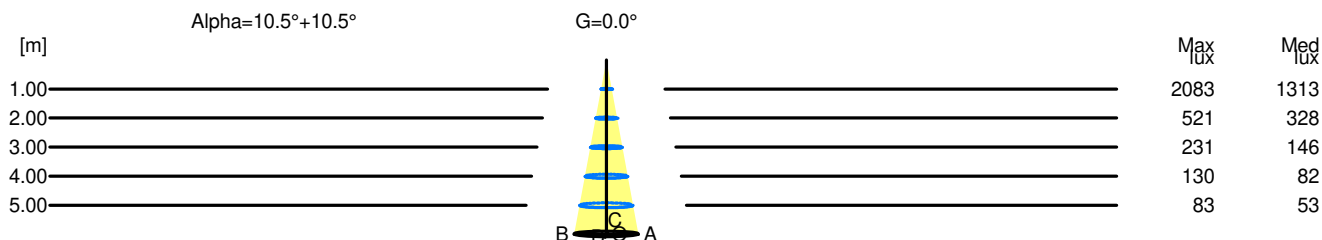

| H[m] | D[m] | Max lux | Med lux | Alpha=10.5°+10.5° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.37 | 2083 | 1313 | | |
| 2.00 | 0.74 | 521 | 328 | | |
| 3.00 | 1.11 | 231 | 146 | | |
| 4.00 | 1.48 | 130 | 82 | | |
| 5.00 | 1.85 | 83 | 53 | | |