


## Luminaire

Code TT44100  
Name Somnium SYS curvo R282,5 mm 90° DIR+IND 4000K


## Measurem.

Code FTS2500136  
Name Somnium SYS curvo R282,5 mm 90° DIR+IND 4000K

Luminaire Flux	829 lm	Luminaire Power	5.4 W	Efficacy	153.519 lm/W	Efficiency	100.00%
Source Flux	829 lm	Maximum value	440.65 cd/klm	Position	C=90.00 G=4.00	CG	Sym. on planes 270-90
Rectangular Luminaire		Length	400 mm	Width	104 mm	Height	32 mm
Rectangular Luminous Area		Length	420 mm	Width	30 mm	Height	18 mm
Horizontal Luminous Area		0.012600 m2		Emitting area on Plane 180°		0.007560 m2	
Emitting area on Plane 0°		0.007560 m2		Emitting area on Plane 270°		0.000540 m2	
Emitting area on Plane 90°		0.000540 m2		Glare area at 76°		0.010384 m2	
Coordinate system		CG Roads		Symmetry Type		Sym. on planes 270-90	
Date		28-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		829 lm	
LED Flux=895lm LED Power=5.4W Eff=93% EfcLed=166lm/W EfcLum=154lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 52 100			D DIN 5040		C61	

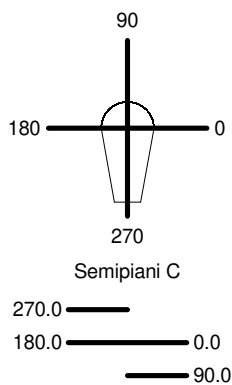

ULOR 48.22 %  
DLOR 51.78 %  
RN 48.22 %

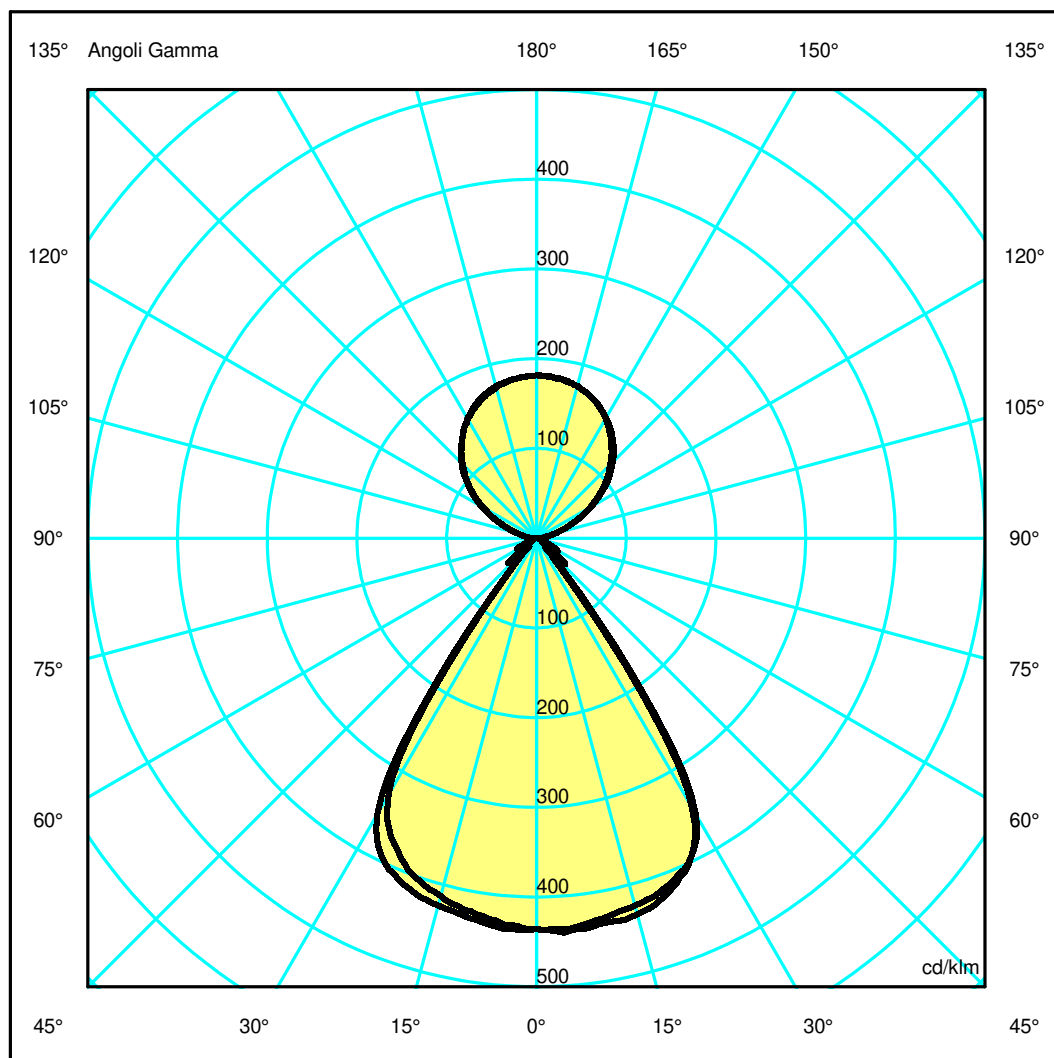

## Luminaire

Code TT44100  
Name Somnium SYS curvo R282,5 mm 90° DIR+IND 4000K

## Measurem.

Code FTS2500136  
Name Somnium SYS curvo R282,5 mm 90° DIR+IND 4000K


Luminaire Flux	829 lm	Luminaire Power	5.4 W	Efficacy	153.519 lm/W	Efficiency	100.00%
Source Flux	829 lm	Maximum value	440.65 cd/klm	Position	C=90.00 G=4.00	CG	Sym. on planes 270-90
Rectangular Luminaire		Length	400 mm	Width	104 mm	Height	32 mm
Rectangular Luminous Area		Length	420 mm	Width	30 mm	Height	18 mm
Horizontal Luminous Area		0.012600 m2		Emitting area on Plane 180°		0.007560 m2	
Emitting area on Plane 0°		0.007560 m2		Emitting area on Plane 270°		0.000540 m2	
Emitting area on Plane 90°		0.000540 m2		Glare area at 76°		0.010384 m2	
Coordinate system		CG Roads		Symmetry Type		Sym. on planes 270-90	
Date		28-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		829 lm	
LED Flux=895lm LED Power=5.4W Eff=93% EfcLed=166lm/W EfcLum=154lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 52 100			D DIN 5040		C61	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.68	1.37	2.05	2.74	3.42	OC	0.67	1.35	2.02	2.69	3.36
OB	0.68	1.37	2.05	2.74	3.42	OD	0.67	1.35	2.02	2.69	3.37

Luminous Intensities [ cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	360.99	361.89	351.34	331.30	158.18	13.02	7.57	4.55	3.15	2.07
OB	360.99	361.89	351.34	331.30	158.18	13.02	7.57	4.55	3.15	2.07
OC	360.99	363.63	359.68	332.57	142.70	20.21	22.59	10.82	2.53	1.18
OD	360.99	358.04	342.25	311.29	142.99	13.29	18.72	12.62	3.05	1.23

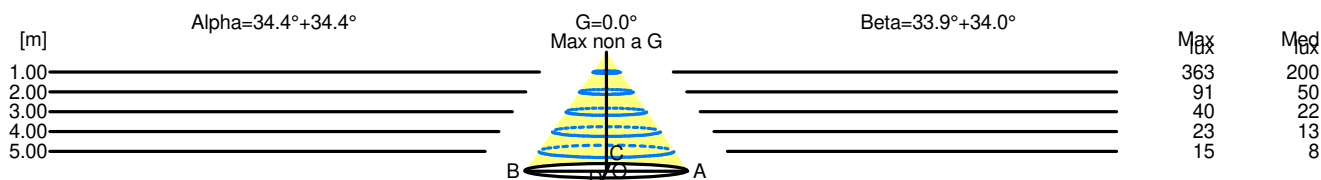

H[m]	D[m]	Max lux	Med lux	Alpha=34.4°+34.4°	G=0.0°	Max non a G
1.00	1.37	363	200			
2.00	2.74	91	50			
3.00	4.10	40	22			
4.00	5.47	23	13			
5.00	6.84	15	8			

H[m]	D[m]	Max lux	Med lux	Beta=34.0°+33.9°	G=0.0°	Max non a G
1.00	1.35	363	200			
2.00	2.69	91	50			
3.00	4.04	40	22			
4.00	5.38	23	13			
5.00	6.73	15	8			