

## Luminaire

Code BN00418  
Name VECTOR 75L 3P DALI 930 XF BCP

## Measurement

Code FTS2500119  
Name VECTOR 75L 3P DALI 930 XF BCP

Luminaire Flux	3220 lm	Luminaire Power	33.0 W	Efficacy	97.576 lm/W	Efficiency	100.00%
Source Flux	3220 lm	Maximum value	1381.81 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire		Diam.	75 mm	Height	168 mm		
Round Luminous Area		Diam.	68 mm	Height	0 mm		
Horizontal Luminous Area		0.003632 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000879 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-05-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3220 lm	
LED Flux=4428lm LED Power=29W Eff=73% EfcLed=151lm/W EfcLum=98lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	97 99 100 100 100			D DIN 5040		A60	
F UTE	--			B NBN		BZ 1	


Diam=75mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

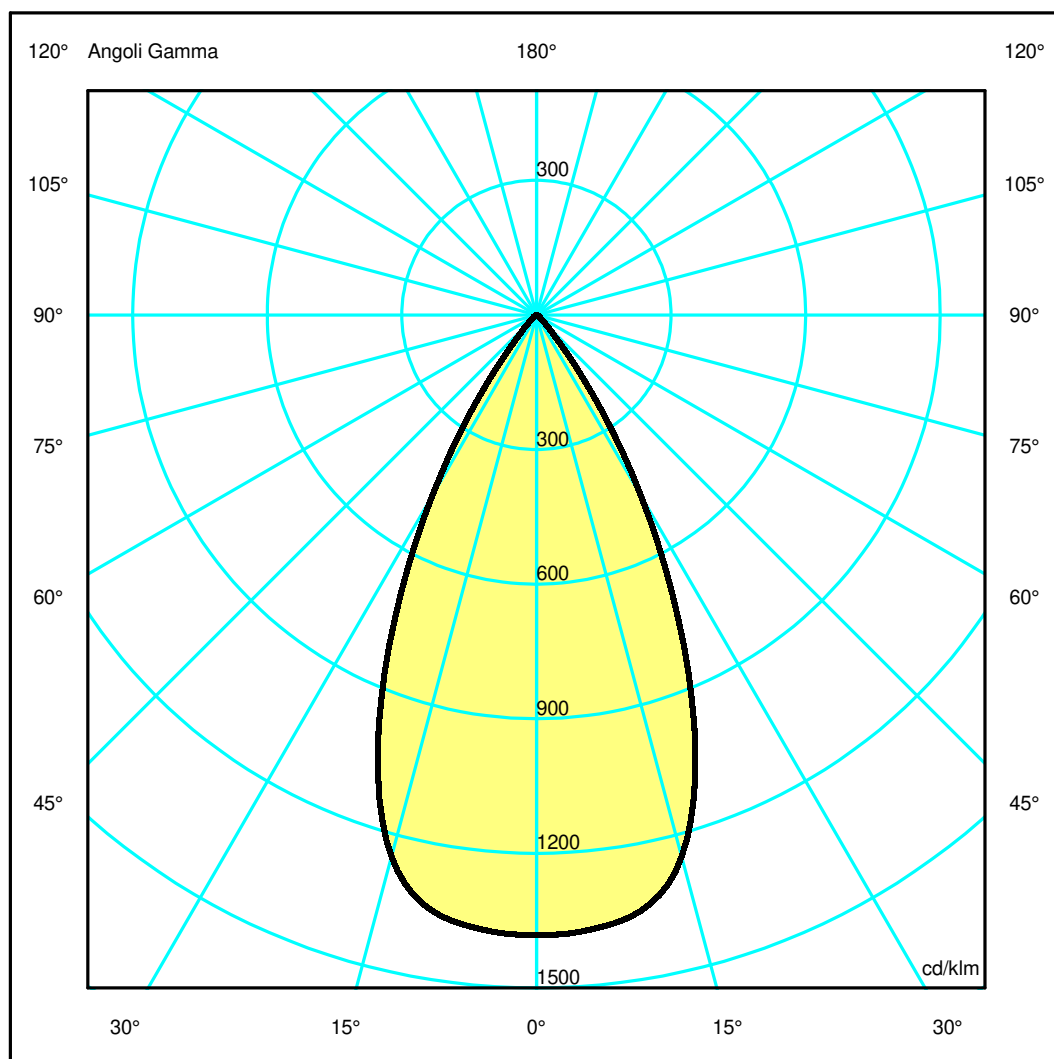

## Luminaire

Code BN00418  
Name VECTOR 75L 3P DALI 930 XF BCP

## Measurem.


Code FTS2500119  
Name VECTOR 75L 3P DALI 930 XF BCP

Luminaire Flux	3220 lm	Luminaire Power	33.0 W	Efficacy	97.576 lm/W	Efficiency	100.00%
Source Flux	3220 lm	Maximum value	1381.81 cd/klm	Position	C=0.00 G=1.00	CG	Rotosymmetrical
Round Luminaire		Diam.	75 mm	Height	168 mm		
Round Luminous Area		Diam.	68 mm	Height	0 mm		
Horizontal Luminous Area		0.003632 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000879 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-05-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3220 lm	
LED Flux=4428lm LED Power=29W Eff=73% EfcLed=151lm/W EfcLum=98lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.97	1.46	1.95	2.44	OC	0.49	0.97	1.46	1.95	2.44
OB	0.49	0.97	1.46	1.95	2.44	OD	0.49	0.97	1.46	1.95	2.44

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4448.00	4427.44	4023.54	2409.22	728.53	88.86	30.46	15.23	3.51	0.72
OB	4448.00	4427.44	4023.54	2409.22	728.53	88.86	30.46	15.23	3.51	0.72
OC	4448.00	4427.44	4023.54	2409.22	728.53	88.86	30.46	15.23	3.51	0.72
OD	4448.00	4427.44	4023.54	2409.22	728.53	88.86	30.46	15.23	3.51	0.72

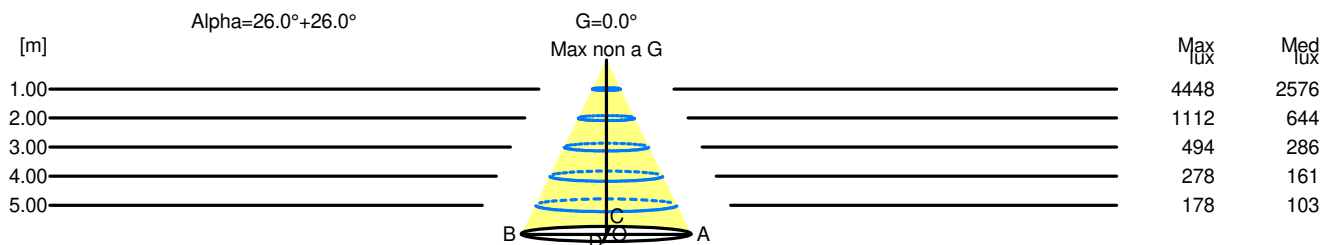

H[m]	D[m]	Max lux	Med lux	Alpha=26.0°+26.0°	G=0.0 Max non a G
1.00	0.97	4448	2576		
2.00	1.95	1112	644		
3.00	2.92	494	286		
4.00	3.90	278	161		
5.00	4.87	178	103		