


Luminaire

Code 2046010APP
Name ALAMBICCO VERTICAL 5 VETRI APP

Measurem.

Code FTS2500144
Name ALAMBICCO VERTICAL 5 VETRI APP

| | | | | | | | |
|---|-----------------|-----------------|---------------|-----------------------------|------------------|--------------|--------------|
| Luminaire Flux | 3969 lm | Luminaire Power | 46.0 W | Efficacy | 86.283 lm/W | Efficiency | 100.00% |
| Source Flux | 3969 lm | Maximum value | 119.41 cd/klm | Position | C=335.00 G=84.00 | CG | Asymmetrical |
| Round Luminaire | | Diam. | 190 mm | Height | 1240 mm | | |
| Round Luminous Area | | Diam. | 190 mm | Height | 1152 mm | | |
| Horizontal Luminous Area | | 0.028353 m2 | | Emitting area on Plane 180° | | 0.218880 m2 | |
| Emitting area on Plane 0° | | 0.218880 m2 | | Emitting area on Plane 270° | | 0.218880 m2 | |
| Emitting area on Plane 90° | | 0.218880 m2 | | Glare area at 76° | | 0.219238 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Asymmetrical | |
| Date | | 16-07-2025 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 3969 lm | |
| LED Flux=4520lm LED Power=41.4W Eff87.8% EfcLed=109.2lm/W EfcLum=86.3lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(9k)>36000h | | | | | | | |
| C.I.E. | 15 40 69 55 100 | | | D DIN 5040 | | C11 | |
| F UTE | -- | | | B NBN | | BZ 10 | |

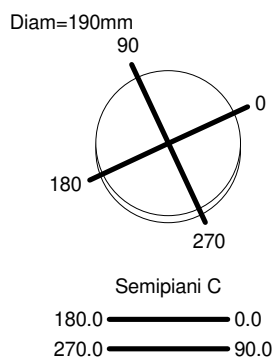

ULOR 45.01 %
DLOR 54.99 %
RN 45.01 %

