


Luminaire

Code 1893W10APP
Name CRIOSFERA S VERT. APP&PUSH 2700K

Measurem.

Code FTS2600111
Name CRIOSFERA S VERT. APP&PUSH 2700K

| | | | | | | | |
|---|-----------------|-----------------|---------------|-----------------------------|------------------|--------------|--------------|
| Luminaire Flux | 3783 lm | Luminaire Power | 29.0 W | Efficacy | 130.448 lm/W | Efficiency | 100.00% |
| Source Flux | 3783 lm | Maximum value | 125.22 cd/klm | Position | C=150.00 G=98.00 | CG | Asymmetrical |
| Round Luminaire | | Diam. | 100 mm | Height | 1050 mm | | |
| Round Luminous Area | | Diam. | 100 mm | Height | 1042 mm | | |
| Horizontal Luminous Area | | 0.007854 m2 | | Emitting area on Plane 180° | | 0.104200 m2 | |
| Emitting area on Plane 0° | | 0.104200 m2 | | Emitting area on Plane 270° | | 0.104200 m2 | |
| Emitting area on Plane 90° | | 0.104200 m2 | | Glare area at 76° | | 0.103005 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Asymmetrical | |
| Date | | 15-09-2025 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 3783 lm | |
| LED Flux=4178lm LED Power=26W Eff=91% EfcLed=161lm/W EfcLum=130lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h | | | | | | | |
| C.I.E. | 10 34 66 50 100 | | | D DIN 5040 | | C11 | |
| F UTE | -- | | | B NBN | | BZ 10 | |

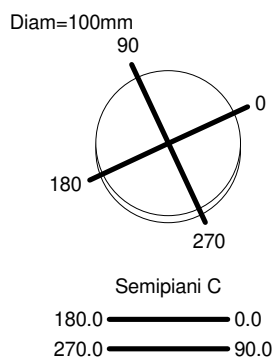

ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

