

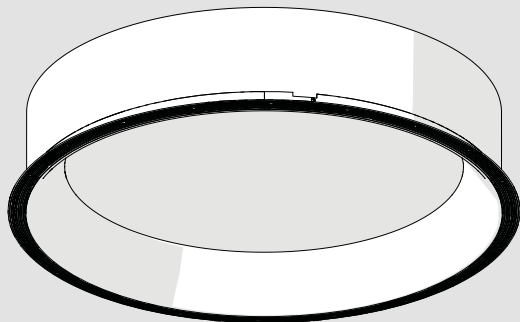
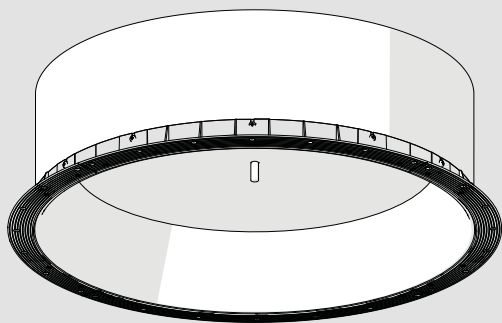



TAGORA RECESSED

design
S./R. Cornelissen

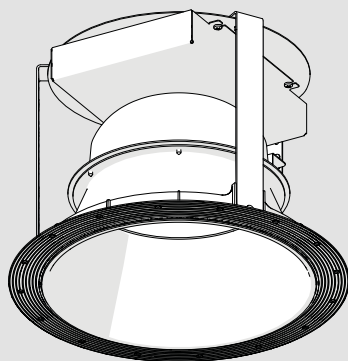

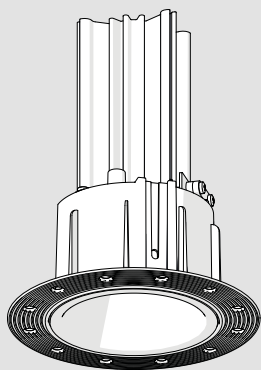


i




TAGORA 80
LED (GU10),
TAGORA 270 ↓

TAGORA 80 LED TAGORA 570,
TAGORA 970 ↓

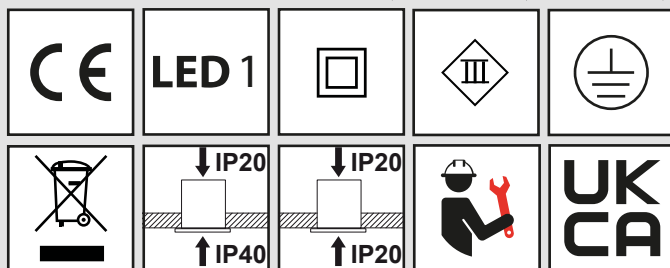


ONLY FOR LED
(GU10) ↓

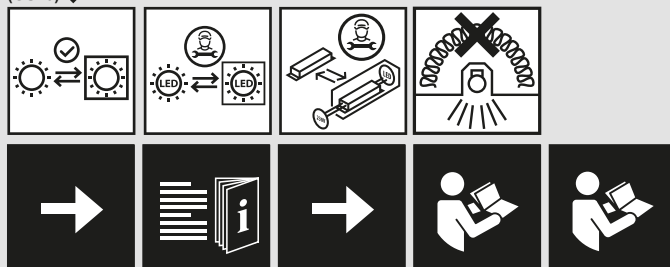




*GWFI = Glow Wire Flammability Index

TAGORA RECESSED ø 80

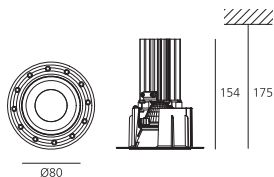


<div>IP20</div> <div>GWFI* 960°C</div>	LED			3000K	flood
	LED1				wide flood
					very wide flood
					4000K
		wide flood			
		very wide flood			
LED (GU10)			1.00 m	LED (GU10) 220-240V max 8W	

TAGORA RECESSED ø 270

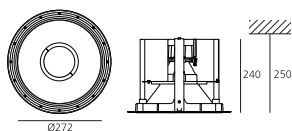


	GWFI 750°C	LED1		3000K	spot
				4000K	flood

TAGORA RECESSED ø 570

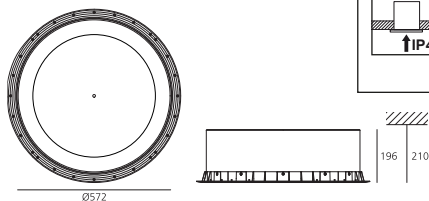

	GWFI 650°C	LED1		3000K
				4000K


TAGORA RECESSED ø 970

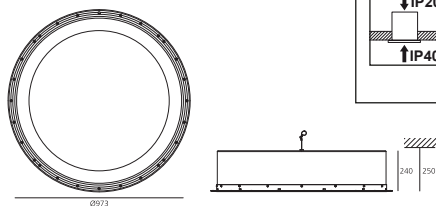

	GWFI 650°C	LED1		3000K
				4000K




TAGORA RECESSED \varnothing 80

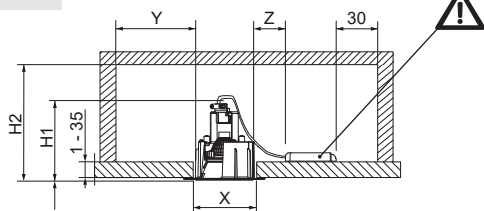


	X(mm)	Y(mm)	Z(mm)	H1(mm)	H2(mm)
LED	$\varnothing 92$	70	100	155	175


1




2

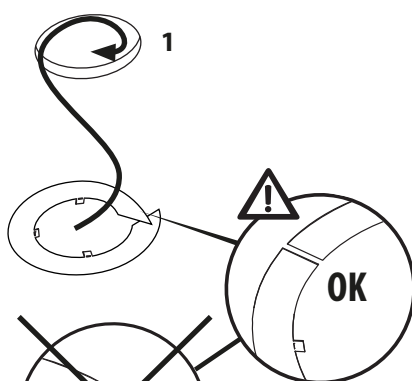



2




4

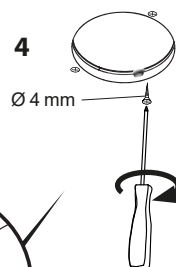

3a LED GU10

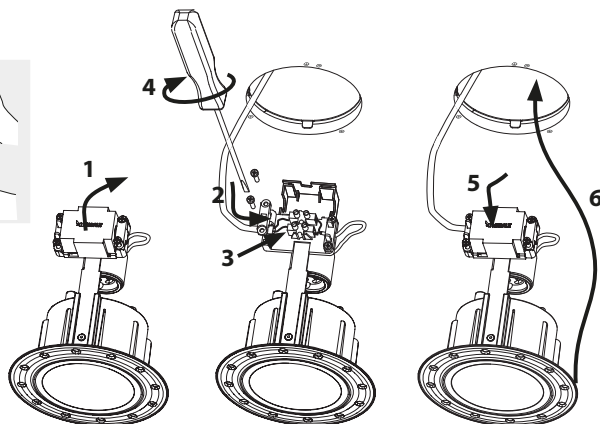



3b LED



L_{max} [m]	10	20	50
\varnothing_{min} [mm ²]	0,50	1,00	2,50

$L_{max} - \varnothing_{min}$




2°




- + Rosso/Red/Rouge/Rojo/Rot
- Nero/Black/Noir/Negro/Schwarz


1°

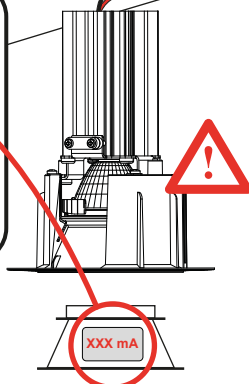

4

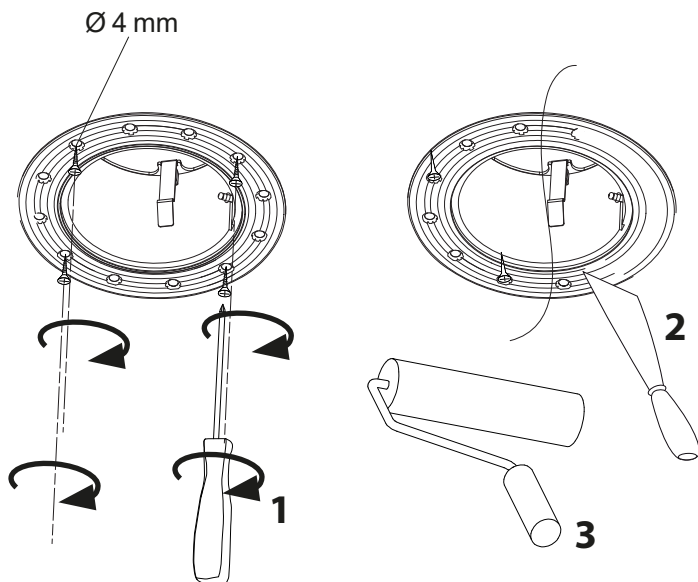


5

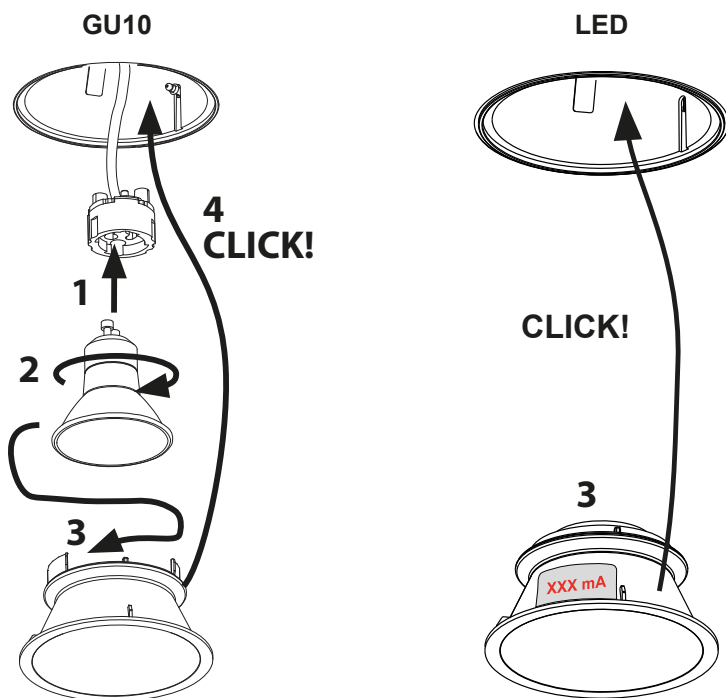




TAGORA RECESSED \varnothing 270

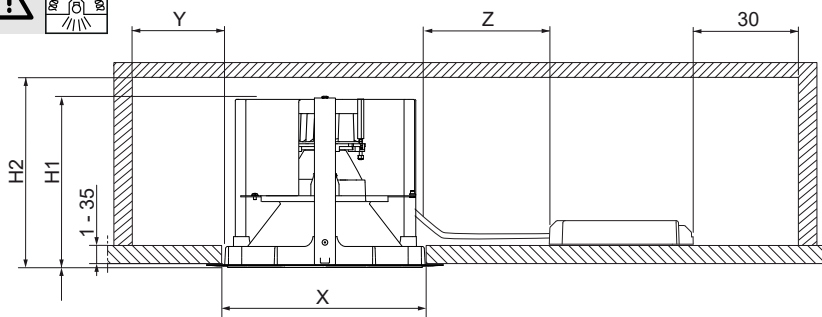


	X(mm)	Y(mm)	Z(mm)	H1(mm)	H2(mm)
LED	\varnothing 292	100	150	240	250

1




\varnothing 292 mm



2

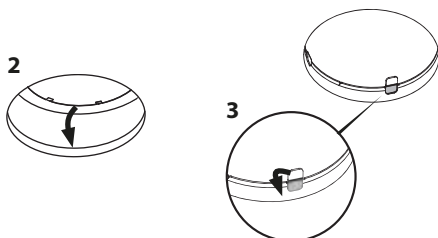


3




\varnothing 4 mm

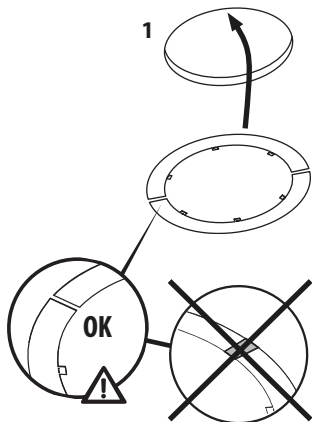




3



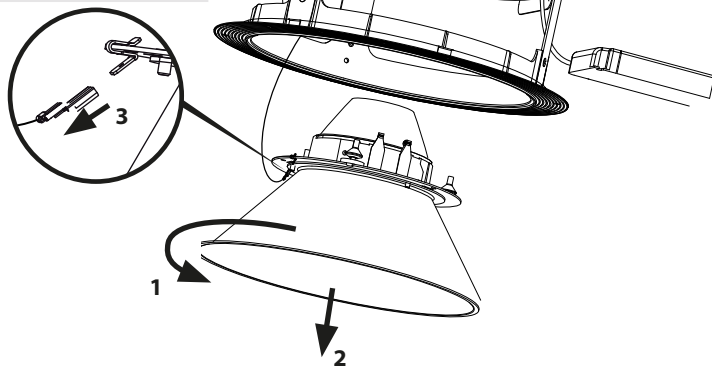


4

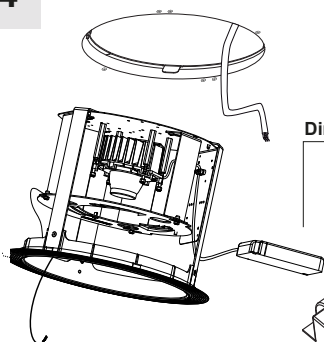


Dimmable DALI


Dimmable SwitchDim

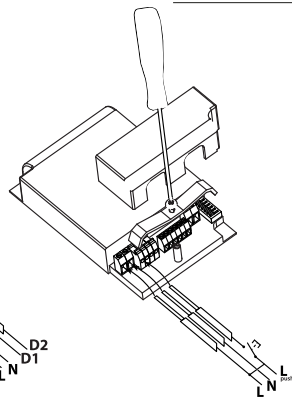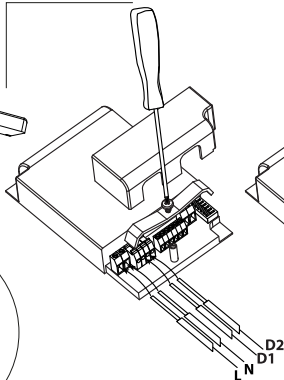

5

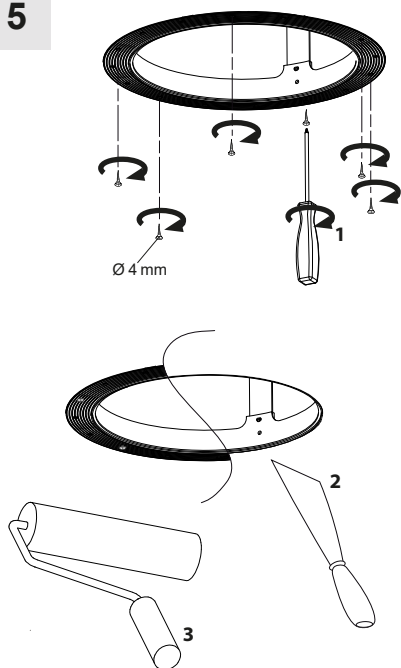


6

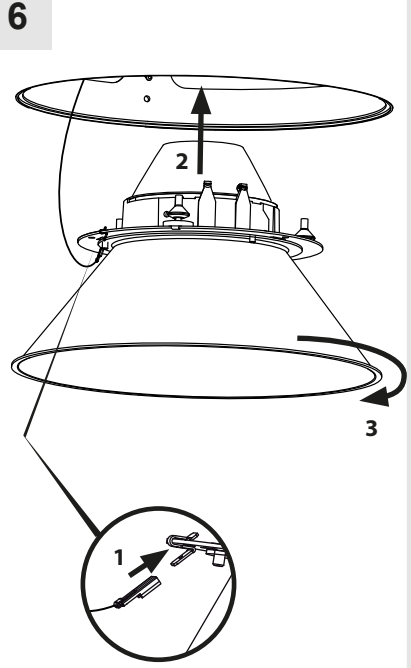




TAGORA RECESSED \varnothing 570



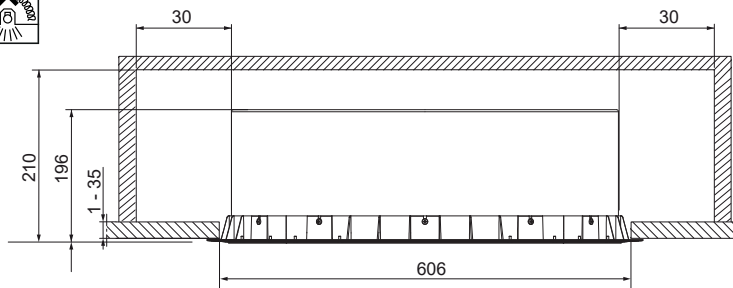


1





\varnothing 606 mm



2




\varnothing 4 mm

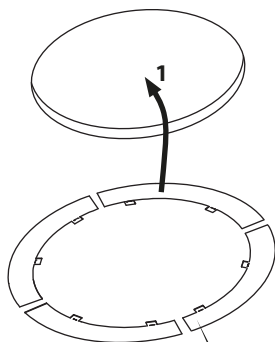


OK






OK




3

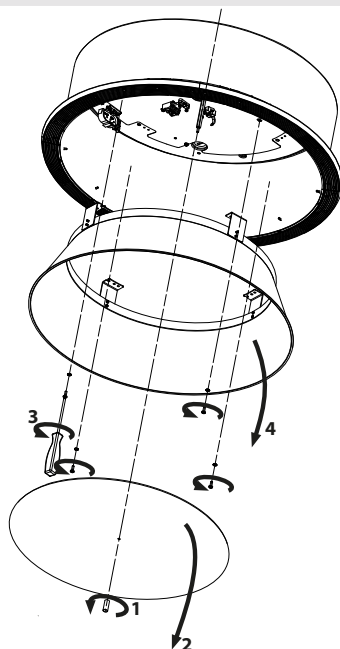


4

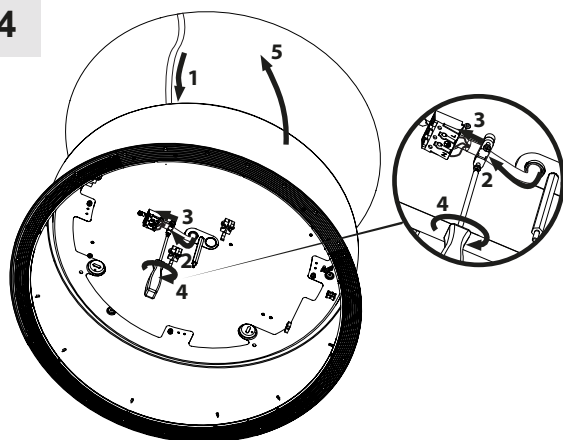


Dimmable Dali




Dimmable SwitchDim

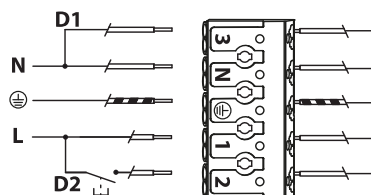


5

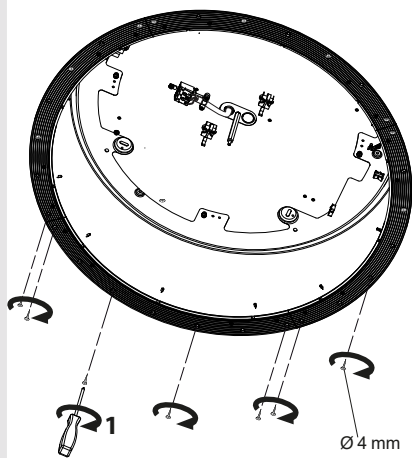

6




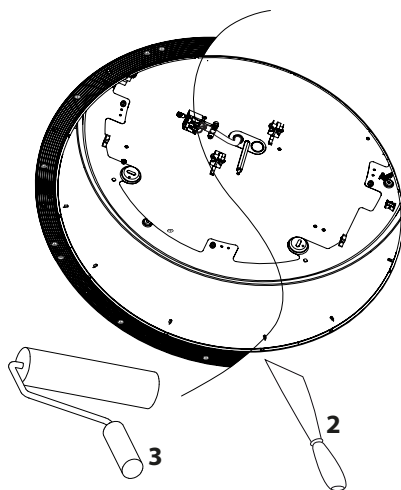



7

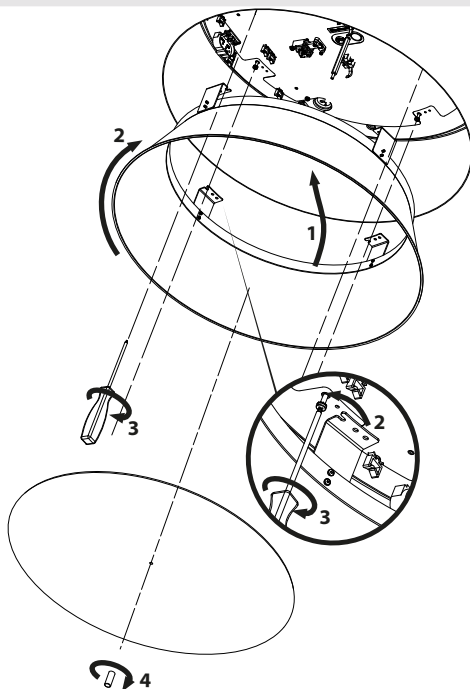






TAGORA RECESSED \varnothing 970

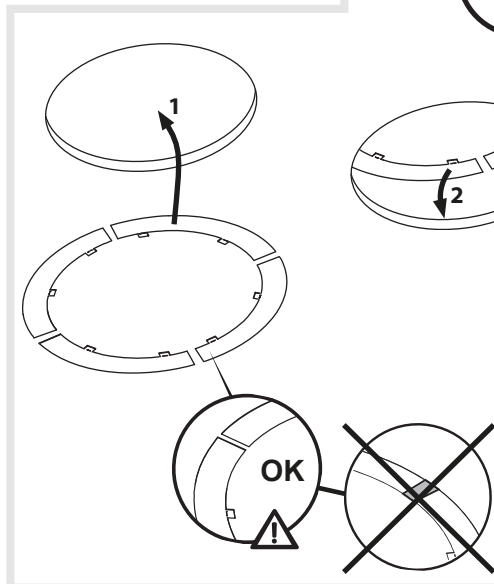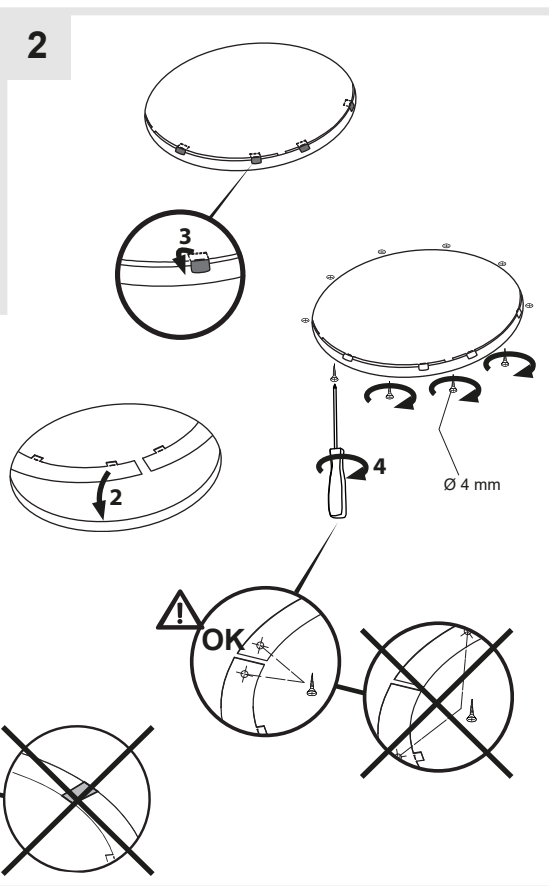

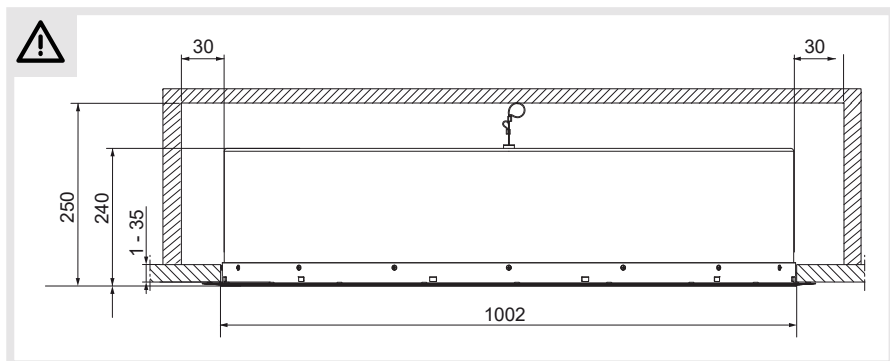





3

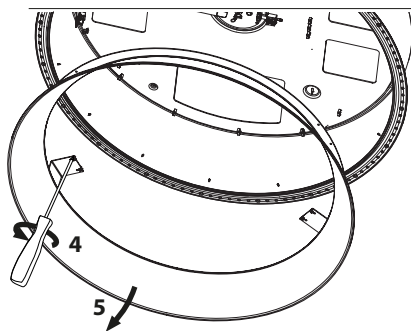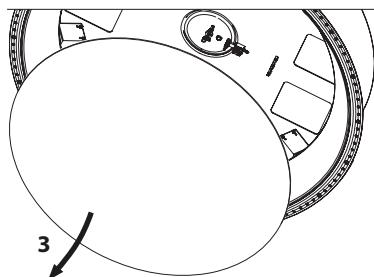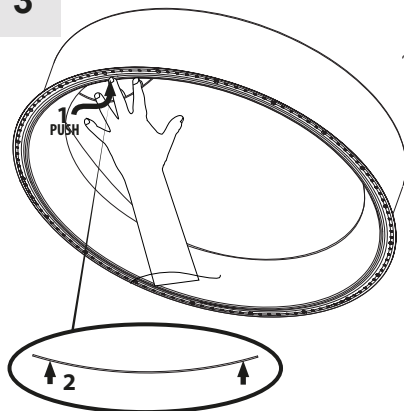


4

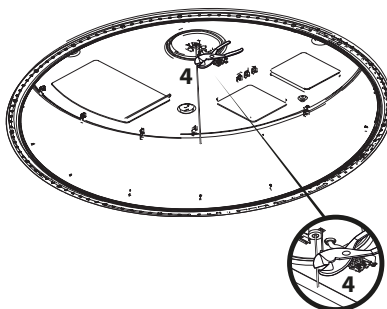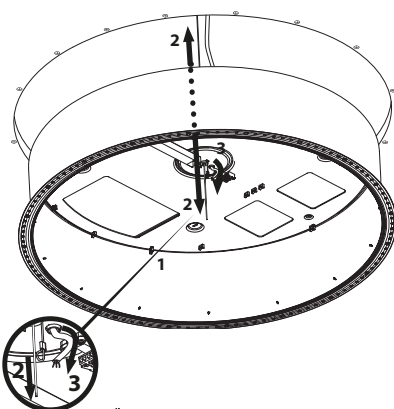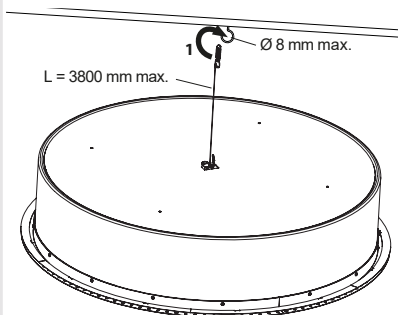



5

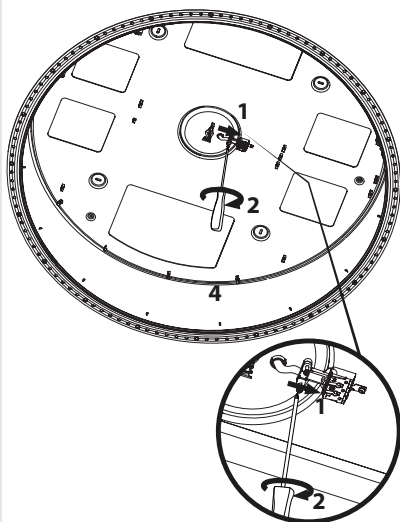



Dimmable Dali





Dimmable SwitchDim



6

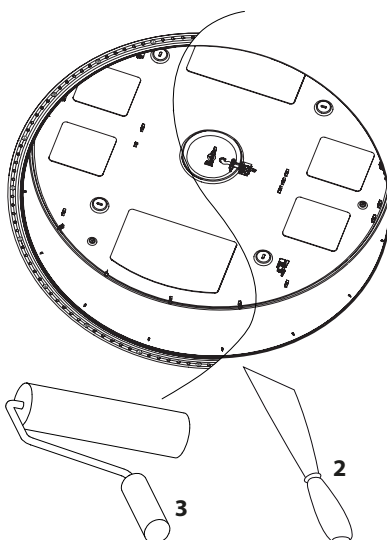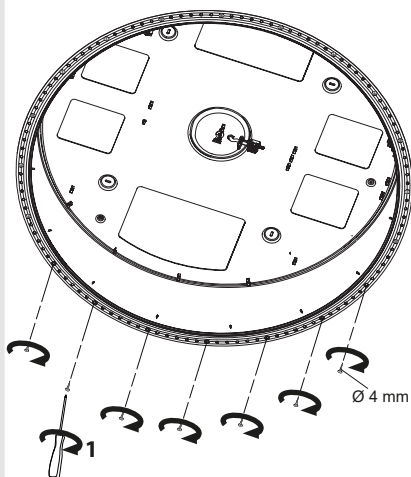

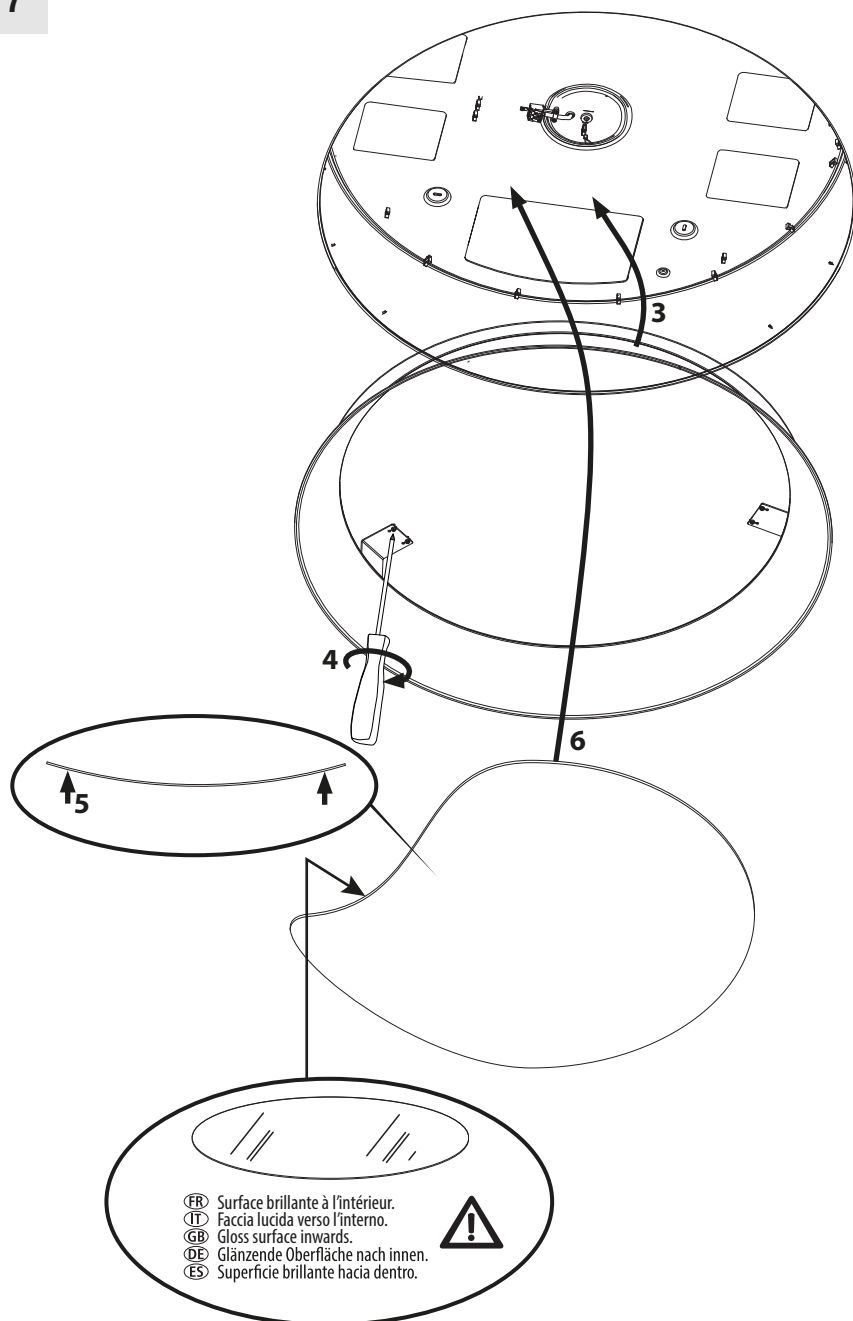



Artemide Spa

via Bergamo, 18
20006 Pregnana M.se (MI)
ITALIA

Tel. +39 02 935 181
Fax +39 02 935 90 254
Fax +39 02 935 90 496

www.artemide.com

VAT IT00846890150