

## Luminaire

Code AA00001\_DMX\_B  
Name LOT RIFR.PROJ.LED R+W BCO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 255 - CH6 0

## Measurement

Code FTS1700318  
Name LOT RIFR.PROJ.LED R+W BCO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 255 - CH6 0

Luminaire Flux	64.05 lm	Luminaire Power	60.00 W	Efficacy	1.07 lm/W	Efficiency	100.00%
Lamps Flux	64.05 lm	Maximum value	350.53 cd/klm	Position	C=0.00 G=11.00	CG	Rotosymmetrical
Round Luminaire		Diam.	185 mm	Height	80 mm		
Round Luminous Area		Diam.	185 mm	Height	0 mm		
Horizontal Luminous Area		0.026880 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006503 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-03-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		64.05 lm	
Continuous Power=60 Peak Power=85W BLUE L70(6K)=50000 h							
C.I.E.	51 84 97 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

Diam=185mm




Semipiani C

180.0 — 0.0

ULOR 0.02 %

DLOR 99.98 %

RN 0.02 %

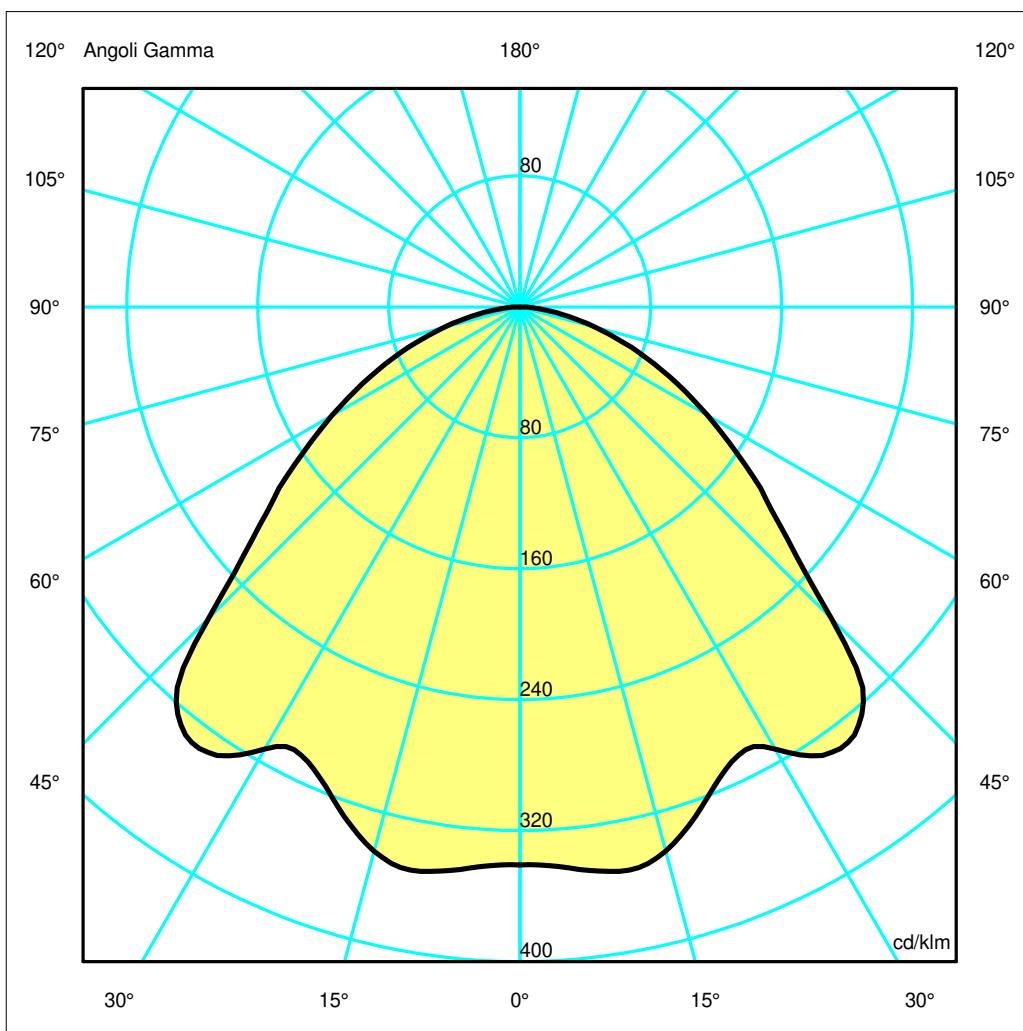

## Luminaire

Code AA00001\_DMX\_B

Name LOT RIFR.PROJ.LED R+W BCO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 255 - CH6 0

## Measurem.

Code FTS1700318


Name LOT RIFR.PROJ.LED R+W BCO - DMX - CH1 0 - CH2 0 - CH3 0 - CH4 0 - CH5 255 - CH6 0

Luminaire Flux	64.05 lm	Luminaire Power	60.00 W	Efficacy	1.07 lm/W	Efficiency	100.00%
Lamps Flux	64.05 lm	Maximum value	350.53 cd/klm	Position	C=0.00 G=11.00	CG	Rotosymmetrical
Round Luminaire		Diam.	185 mm	Height	80 mm		
Round Luminous Area		Diam.	185 mm	Height	0 mm		
Horizontal Luminous Area		0.026880 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006503 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-03-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		64.05 lm	
Continuous Power=60 Peak Power=85W BLUE L70(6K)=50000 h							
C.I.E.	51 84 97 100 100			D DIN 5040		A40	
F UTE	1.00 D			B NBN		BZ 4	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.38	2.76	4.14	5.52	6.90	OC	1.38	2.76	4.14	5.52	6.90
OB	1.38	2.76	4.14	5.52	6.90	OD	1.38	2.76	4.14	5.52	6.90

				Luminous Intensities [ cd/klm]						
	0	5	15	25	35	45	55	65	75	85
OA	21.83	22.04	22.05	19.63	21.28	17.22	10.75	6.47	3.03	0.63
OB	21.83	22.04	22.05	19.63	21.28	17.22	10.75	6.47	3.03	0.63
OC	21.83	22.04	22.05	19.63	21.28	17.22	10.75	6.47	3.03	0.63
OD	21.83	22.04	22.05	19.63	21.28	17.22	10.75	6.47	3.03	0.63

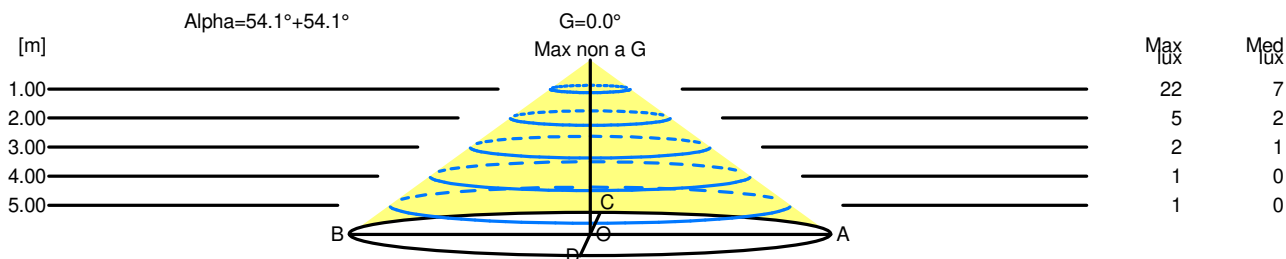

H[m]	D[m]	Max lux	Med lux	Alpha=54.1°+54.1°	G=0.0 Max non a G	
1.00	2.76	22	7			
2.00	5.52	5	2			
3.00	8.29	2	1			
4.00	11.05	1	0			
5.00	13.81	1	0			