

## Luminaire


Code AT05701+AT10200  
Name A.39 MODULO RCS TRIM DIFF L=1482mm 840 ND BCO

## Measurement

Code FTS1801001-A  
Name A.39 MODULO RCS TRIM DIFF L=1482mm 840 ND BCO

Luminaire Flux	2914 lm	Luminaire Power	25.0 W	Efficacy	116.560 lm/W	Efficiency	100.00%
Source Flux	2914 lm	Maximum value	384.72 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1480 mm	Width	55 mm	Height	57 mm
Rectangular Luminous Area		Length	1472 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.058880 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.014244 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		26-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2914 lm	
LED Flux=4161lm LED Power=22W Eff=70% EfcLed=191lm/W EfcLum=117lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	49 80 96 100 100			D DIN 5040		A30	
F UTE	1.00 E			B NBN		BZ 4	

1480mm x 55mm




Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

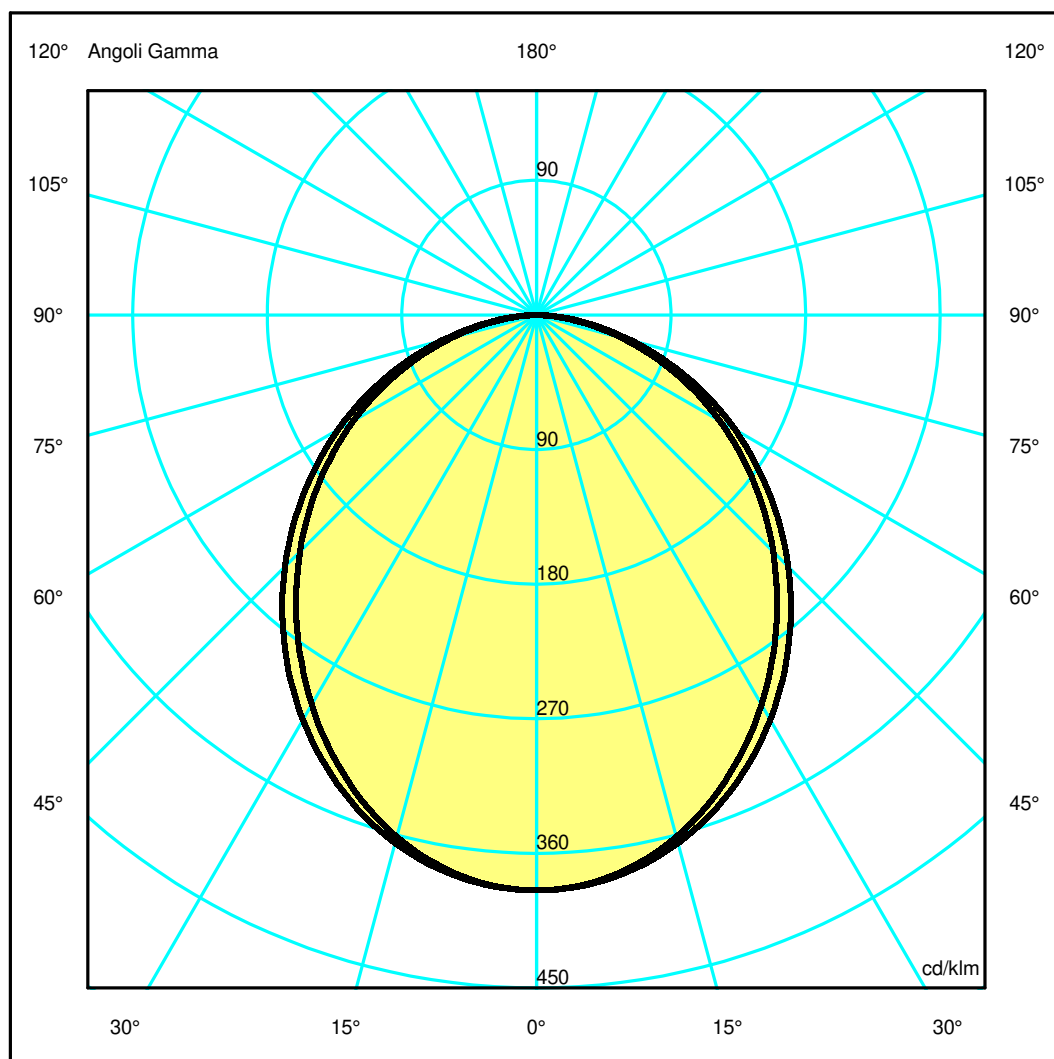

## Luminaire

Code AT05701+AT10200  
Name A.39 MODULO RCS TRIM DIFF L=1482mm 840 ND BCO

## Measurem.

Code FTS1801001-A  
Name A.39 MODULO RCS TRIM DIFF L=1482mm 840 ND BCO

Luminaire Flux	2914 lm	Luminaire Power	25.0 W	Efficacy	116.560 lm/W	Efficiency	100.00%
Source Flux	2914 lm	Maximum value	384.72 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1480 mm	Width	55 mm	Height	57 mm
Rectangular Luminous Area		Length	1472 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.058880 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.014244 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		26-02-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2914 lm	


LED Flux=4161lm LED Power=22W Eff=70% EfcLed=191lm/W EfcLum=117lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E.	49 80 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.23	2.45	3.68	4.91	6.13	OC	1.34	2.67	4.01	5.35	6.69
OB	1.23	2.45	3.68	4.91	6.13	OD	1.34	2.67	4.01	5.35	6.69

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1121.06	1113.09	1052.63	943.31	804.98	652.25	492.29	331.20	171.12	40.80
OB	1121.06	1113.09	1052.63	943.31	804.98	652.25	492.29	331.20	171.12	40.80
OC	1121.06	1114.91	1065.15	970.29	844.04	693.43	529.43	361.22	191.02	49.90
OD	1121.06	1114.91	1065.15	970.29	844.04	693.43	529.43	361.22	191.02	49.90

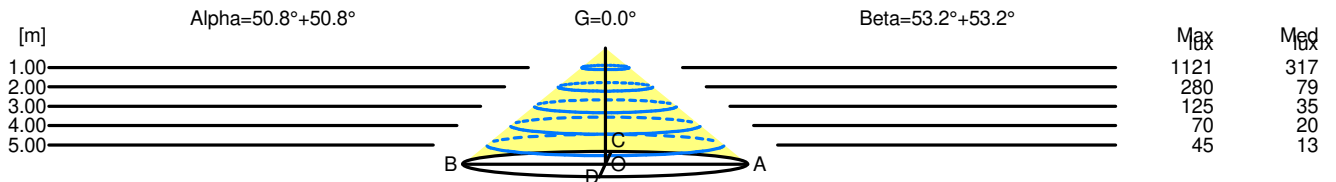

H[m]	D[m]	Max lux	Med lux	Alpha=50.8°+50.8°	G=0.0
1.00	2.45	1121	317		
2.00	4.91	280	79		
3.00	7.36	125	35		
4.00	9.81	70	20		
5.00	12.27	45	13		

H[m]	D[m]	Max lux	Med lux	Beta=53.2°+53.2°	G=0.0
1.00	2.67	1121	317		
2.00	5.35	280	79		
3.00	8.02	125	35		
4.00	10.70	70	20		
5.00	13.37	45	13		