

Luminaire

Code AN35804+M282007
Name VECTOR 95 TRACK 940 WL DALI EUTRAC NRO+ lens for elliptical emission

Measur.


Code FTS2001805
Name VECTOR 95 TRACK 940 WL DALI EUTRAC NRO+ lens for elliptical emission

Luminaire Flux	1819.52 lm	Luminaire Power	30.00 W	Efficacy	60.65 lm/W	Efficiency	100.00%
Lamps Flux	1819.52 lm	Maximum value	1519.43 cd/klm	Position	C=70.00 G=1.00	CG	Double Symmetrical
Round Luminaire		Diam.	95 mm	Height	210 mm		
Round Luminous Area		Diam.	75 mm	Height	0 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001069 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		29-03-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1819.52 lm	
LED Flux=3485lm LED Power=27.5W Eff=52% EfcLed=127lm/W EfcLum=61lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	93 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.44	0.88	1.32	1.75	2.19	OC	0.41	0.83	1.24	1.66	2.07
OB	0.44	0.88	1.32	1.75	2.19	OD	0.41	0.83	1.24	1.66	2.07

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2759.39	2661.55	2098.53	1265.57	575.45	205.45	69.41	29.47	11.42	0.52
OB	2759.39	2661.55	2098.53	1265.57	575.45	205.45	69.41	29.47	11.42	0.52
OC	2759.39	2690.35	2138.65	1097.25	239.56	40.65	18.97	13.20	4.35	0.48
OD	2759.39	2690.35	2138.65	1097.25	239.56	40.65	18.97	13.20	4.35	0.48

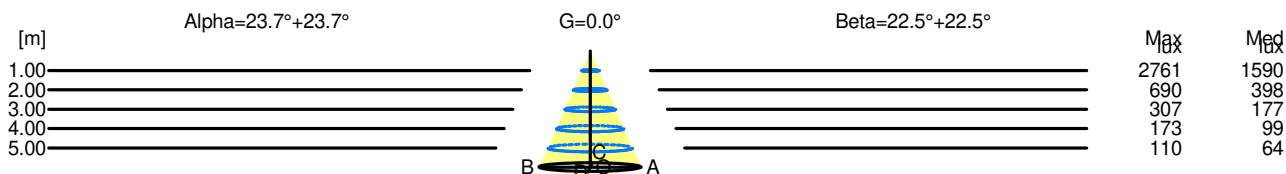

H[m]	D[m]	Max lux	Med lux	Alpha=23.7°+23.7°	G=0.0	
1.00	0.88	2761	1590			
2.00	1.75	690	398			
3.00	2.63	307	177			
4.00	3.51	173	99			
5.00	4.38	110	64			

H[m]	D[m]	Max lux	Med lux	Beta=22.5°+22.5°	G=0.0	
1.00	0.83	2761	1590			
2.00	1.66	690	398			
3.00	2.49	307	177			
4.00	3.32	173	99			
5.00	4.15	110	64			