

Luminaire

Code AN35618
Name VECTOR 95 TRACK 940 SP DALI EUTRAC BR.COPPER

Measurem.

Code FTS1901139
Name VECTOR 95 TRACK 940 SP DALI EUTRAC BR.COPPER

Luminaire Flux	2735.38 lm	Luminaire Power	30.00 W	Efficacy	91.18 lm/W	Efficiency	100.00%
Lamps Flux	2735.38 lm	Maximum value	8143.64 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 95 mm Diam. 75 mm	Height 210 mm Height 0 mm					
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.001069 m2				
Coordinate system Date Measurement Distance	CG 27-03-2019 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 2735.38 lm				
LED Flux=3485lm LED Power=27.5W Eff=78% EfcLed=127lm/W EfcLum=91lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	100 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				


Diam=95mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

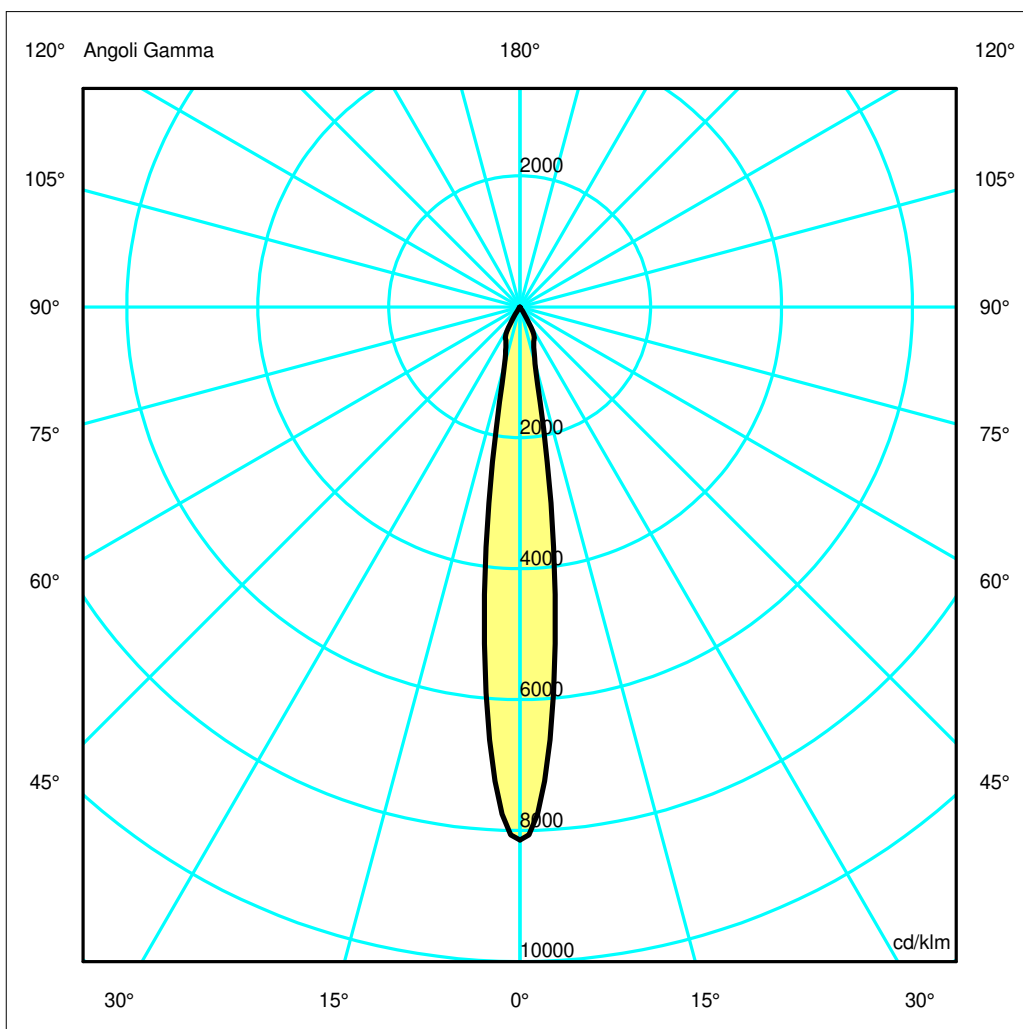

Luminaire

Code AN35618
Name VECTOR 95 TRACK 940 SP DALI EUTRAC BR.COPPER

Measurement


Code FTS1901139
Name VECTOR 95 TRACK 940 SP DALI EUTRAC BR.COPPER

Luminaire Flux	2735.38 lm	Luminaire Power	30.00 W	Efficacy	91.18 lm/W	Efficiency	100.00%
Lamps Flux	2735.38 lm	Maximum value	8143.64 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001069 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-03-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2735.38 lm	
LED Flux=3485lm LED Power=27.5W Eff=78% EfcLed=127lm/W EfcLum=91lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	100	100	100	100	100	D DIN 5040 B NBN	A60 BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.13	0.26	0.39	0.53	0.66	OC	0.13	0.26	0.39	0.53	0.66
OB	0.13	0.26	0.39	0.53	0.66	OD	0.13	0.26	0.39	0.53	0.66

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	22275.95	16180.87	2452.06	1428.44	42.21	6.17	2.52	1.54	0.90	0.47
OB	22275.95	16180.87	2452.06	1428.44	42.21	6.17	2.52	1.54	0.90	0.47
OC	22275.95	16180.87	2452.06	1428.44	42.21	6.17	2.52	1.54	0.90	0.47
OD	22275.95	16180.87	2452.06	1428.44	42.21	6.17	2.52	1.54	0.90	0.47

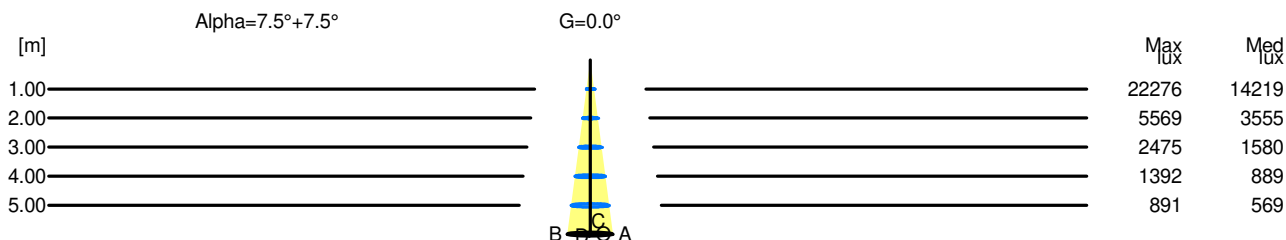

H[m]	D[m]	Max lux	Med lux	Alpha=7.5°+7.5°	G=0.0
1.00	0.26	22276	14219		
2.00	0.53	5569	3555		
3.00	0.79	2475	1580		
4.00	1.05	1392	889		
5.00	1.32	891	569		