

Luminaire

Code AN35718
Name VECTOR 95 TRACK 940 FL DALI EUTRAC BR.COPPER

Measurem.

Code FTS1901157
Name VECTOR 95 TRACK 940 FL DALI EUTRAC BR.COPPER

Luminaire Flux	2748.28 lm	Luminaire Power	30.00 W	Efficacy	91.61 lm/W	Efficiency	100.00%
Lamps Flux	2748.28 lm	Maximum value	4344.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001069 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2748.28 lm	
LED Flux=3485lm LED Power=27.5W Eff=79% EfcLed=127lm/W EfcLum=92lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Diam=95mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

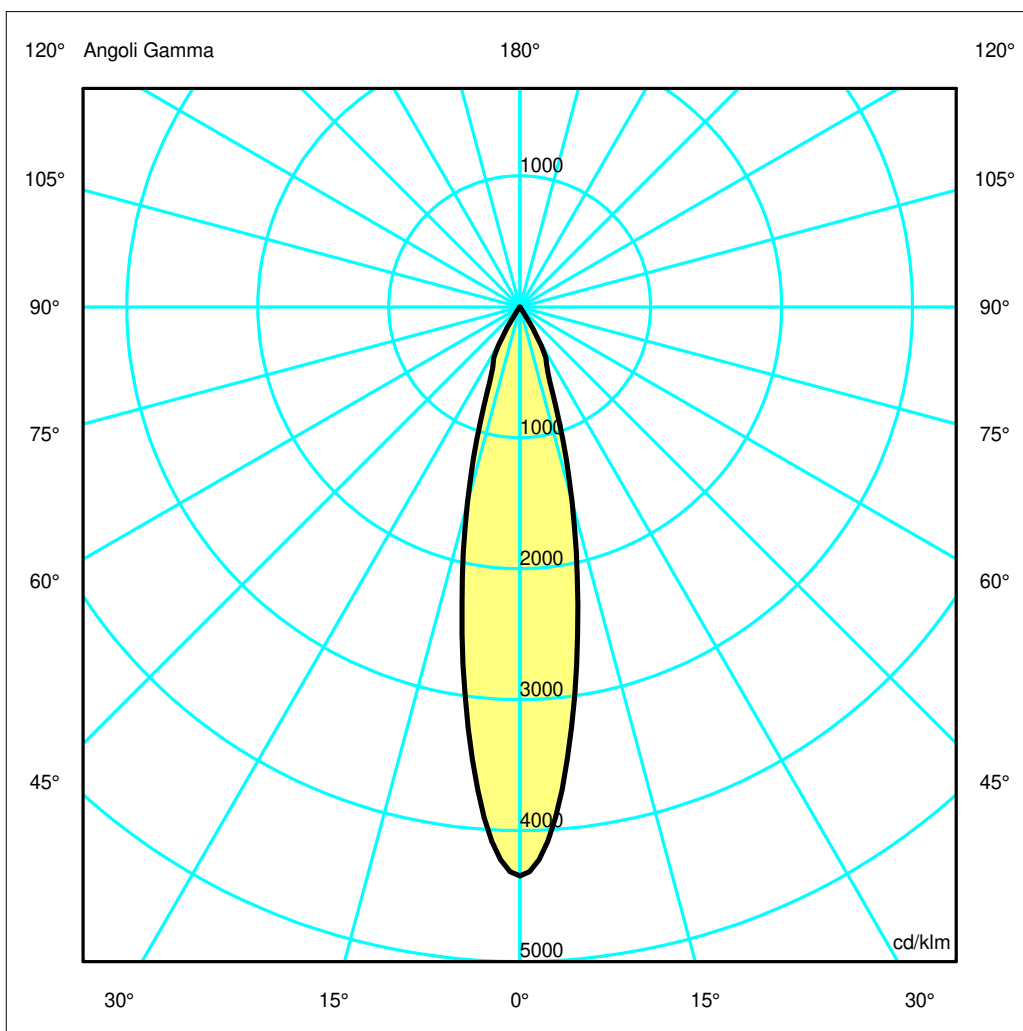

Luminaire

Code AN35718
Name VECTOR 95 TRACK 940 FL DALI EUTRAC BR.COPPER

Measurement


Code FTS1901157
Name VECTOR 95 TRACK 940 FL DALI EUTRAC BR.COPPER

Luminaire Flux	2748.28 lm	Luminaire Power	30.00 W	Efficacy	91.61 lm/W	Efficiency	100.00%
Lamps Flux	2748.28 lm	Maximum value	4344.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001069 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2748.28 lm	
LED Flux=3485lm LED Power=27.5W Eff=79% EfcLed=127lm/W EfcLum=92lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	100	100	100	100	100	D DIN 5040 B NBN	A60 BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.41	0.62	0.83	1.04	OC	0.21	0.41	0.62	0.83	1.04
OB	0.21	0.41	0.62	0.83	1.04	OD	0.21	0.41	0.62	0.83	1.04

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	11939.76	10165.42	4246.33	1322.25	34.37	5.91	2.53	1.52	0.96	0.50
OB	11939.76	10165.42	4246.33	1322.25	34.37	5.91	2.53	1.52	0.96	0.50
OC	11939.76	10165.42	4246.33	1322.25	34.37	5.91	2.53	1.52	0.96	0.50
OD	11939.76	10165.42	4246.33	1322.25	34.37	5.91	2.53	1.52	0.96	0.50

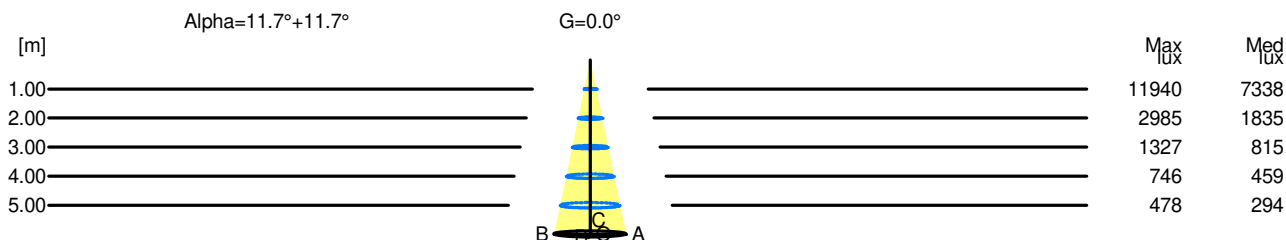

H[m]	D[m]	Max lux	Med lux	Alpha=11.7°+11.7°	G=0.0
1.00	0.41	11940	7338		
2.00	0.83	2985	1835		
3.00	1.24	1327	815		
4.00	1.66	746	459		
5.00	2.07	478	294		