

Luminaire

Code AN30820
Name VECTOR 95 TRACK 930 WL DALI EUTRAC BR.BRONZE

Measurem.

Code FTS1901170
Name VECTOR 95 TRACK 930 WL DALI EUTRAC BR.BRONZE

Luminaire Flux	2661.52 lm	Luminaire Power	30.00 W	Efficacy	88.72 lm/W	Efficiency	100.00%
Lamps Flux	2661.52 lm	Maximum value	1223.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001069 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-03-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2661.52 lm	
LED Flux=3432lm LED Power=27.5W Eff=78% EfcLed=125lm/W EfcLum=89lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100		
F UTE	--						
					D DIN 5040 B NBN	A60 BZ 1	

Diam=95mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

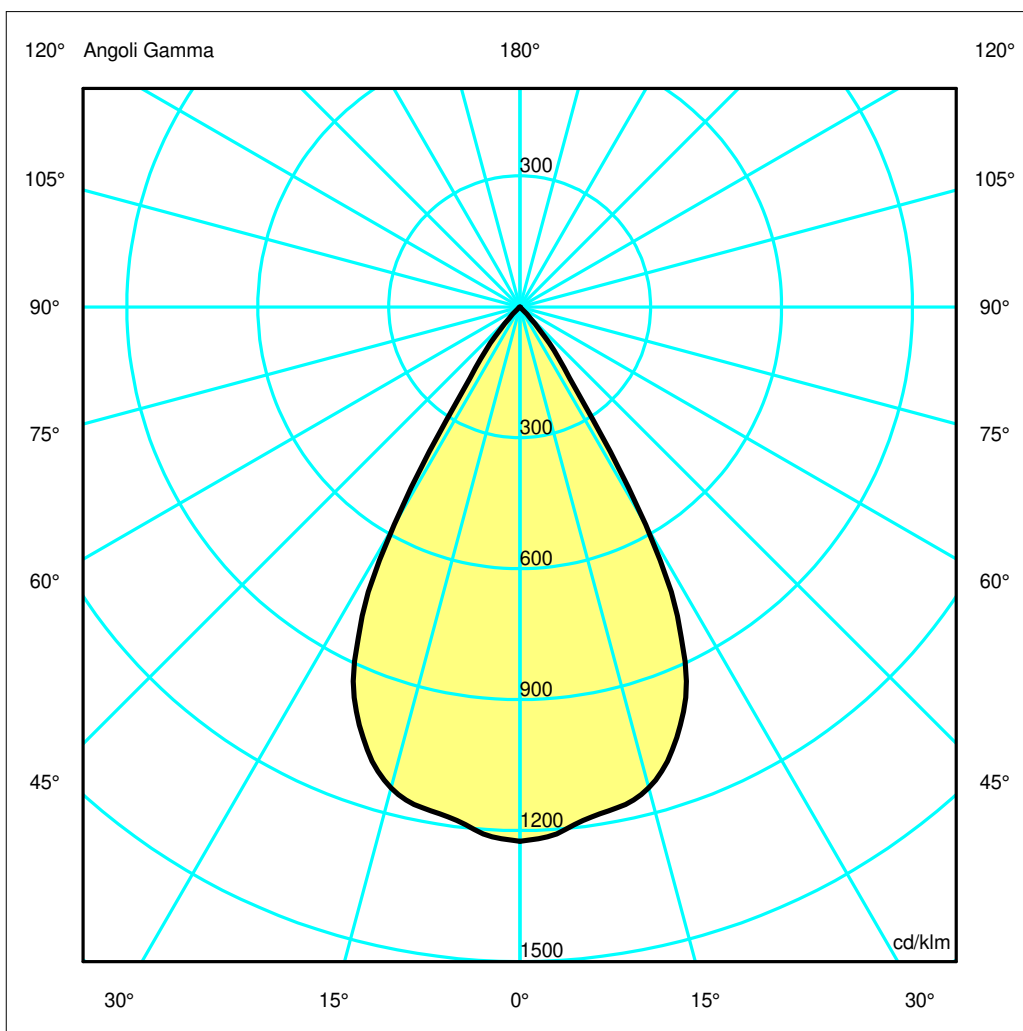

Luminaire


Code AN30820
Name VECTOR 95 TRACK 930 WL DALI EUTRAC BR.BRONZE
Measurement.
Code FTS1901170
Name VECTOR 95 TRACK 930 WL DALI EUTRAC BR.BRONZE

Luminaire Flux	2661.52 lm	Luminaire Power	30.00 W	Efficacy	88.72 lm/W	Efficiency	100.00%
Lamps Flux	2661.52 lm	Maximum value	1223.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001069 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		27-03-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2661.52 lm	
LED Flux=3432lm LED Power=27.5W Eff=78% EfcLed=125lm/W EfcLum=89lm/W CCT=3000K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99	100	100	100	100	D DIN 5040 B NBN	A60 BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.57	1.14	1.70	2.27	2.84	OC	0.57	1.14	1.70	2.27	2.84
OB	0.57	1.14	1.70	2.27	2.84	OD	0.57	1.14	1.70	2.27	2.84

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3257.49	3197.71	3036.26	2384.62	529.62	28.09	2.97	1.55	1.02	0.51
OB	3257.49	3197.71	3036.26	2384.62	529.62	28.09	2.97	1.55	1.02	0.51
OC	3257.49	3197.71	3036.26	2384.62	529.62	28.09	2.97	1.55	1.02	0.51
OD	3257.49	3197.71	3036.26	2384.62	529.62	28.09	2.97	1.55	1.02	0.51

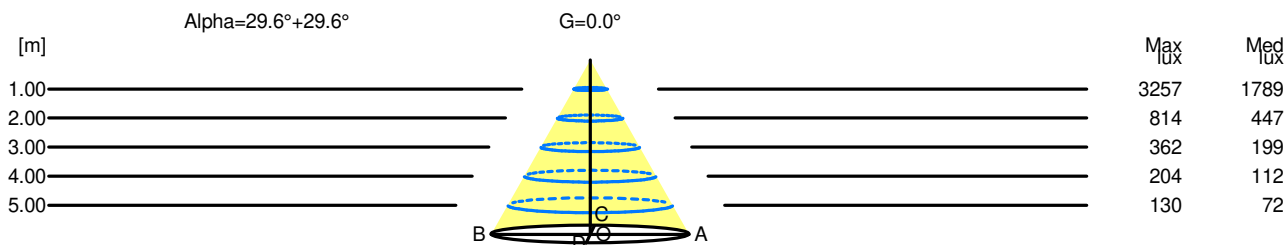

H[m]	D[m]	Max lux	Med lux	Alpha=29.6°+29.6°	G=0.0
1.00	1.14	3257	1789		
2.00	2.27	814	447		
3.00	3.41	362	199		
4.00	4.54	204	112		
5.00	5.68	130	72		