

Luminaire


Code AN31715+M056807
Name VECTOR 95 TRACK 927 FL DALI EUTRAC BR.SILVER + soft filter

Measurem.

Code FTS2001646
Name VECTOR 95 TRACK 927 FL DALI EUTRAC BR.SILVER + soft filter

| | | | | | | | |
|--|-------------------|-----------------|----------------|-----------------------------|----------------|-----------------|-----------------|
| Luminaire Flux | 1886.61 lm | Luminaire Power | 30.00 W | Efficacy | 62.89 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1886.61 lm | Maximum value | 2512.89 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire Round Luminous Area | | Diam. Diam. | 95 mm 75 mm | Height Height | 210 mm 0 mm | | |
| Horizontal Luminous Area | | 0.004418 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.001069 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 03-04-2019 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1886.61 lm | |
| LED Flux=3300lm LED Power=27.5W Eff=57% EfcLed=120lm/W EfcLum=63lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 97 99 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | 1.00 A | | | B NBN | BZ 1 | | |

Diam=95mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

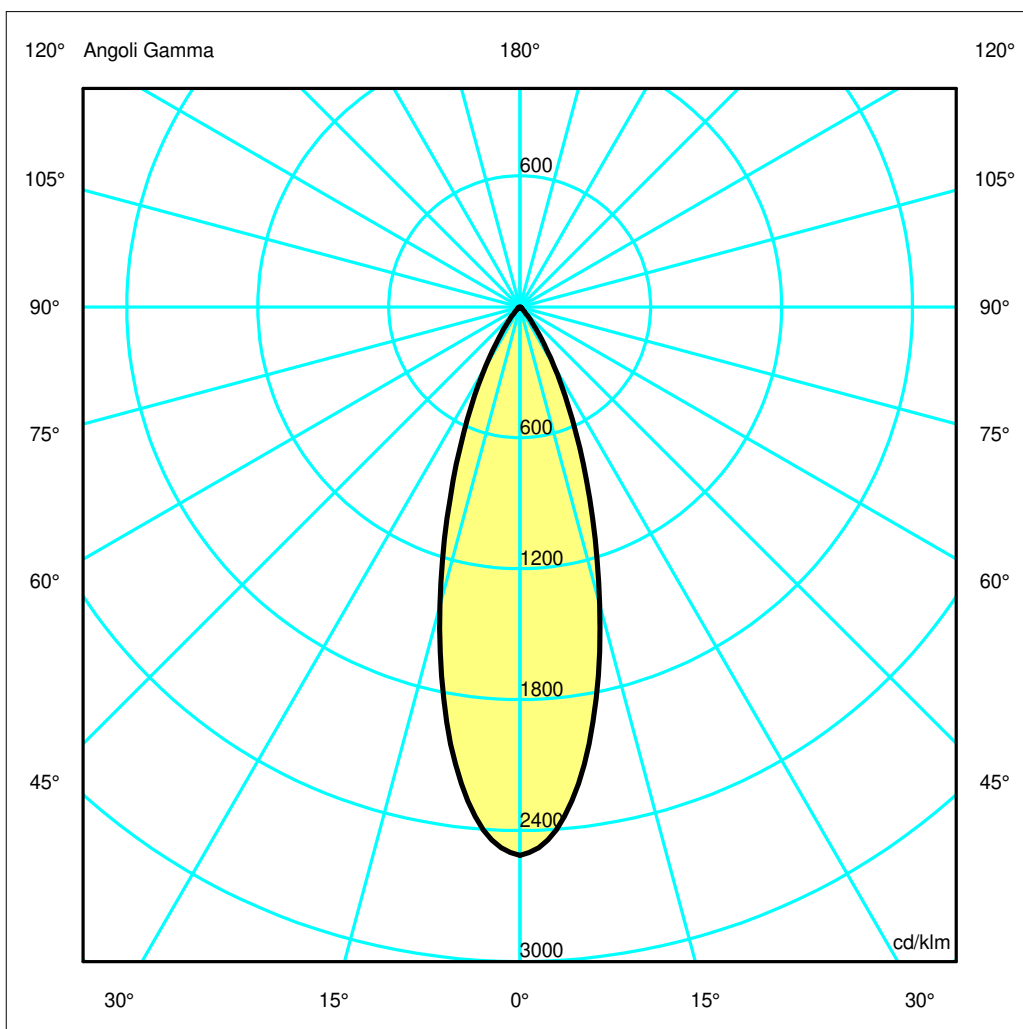

Luminaire

Code AN31715+M056807
Name VECTOR 95 TRACK 927 FL DALI EUTRAC BR.SILVER + soft filter

Measur.


Code FTS2001646
Name VECTOR 95 TRACK 927 FL DALI EUTRAC BR.SILVER + soft filter

| | | | | | | | |
|--|-----------------------------|-----------------|----------------|-----------------------------|----------------|-----------------|-----------------|
| Luminaire Flux | 1886.61 lm | Luminaire Power | 30.00 W | Efficacy | 62.89 lm/W | Efficiency | 100.00% |
| Lamps Flux | 1886.61 lm | Maximum value | 2512.89 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire Round Luminous Area | | Diam. Diam. | 95 mm 75 mm | Height Height | 210 mm 0 mm | | |
| Horizontal Luminous Area | | 0.004418 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.001069 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 03-04-2019 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1886.61 lm | |
| LED Flux=3300lm LED Power=27.5W Eff=57% EfcLed=120lm/W EfcLum=63lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. F UTE | 97 99 100 100 100 1.00 A | | | D DIN 5040 B NBN | A60 BZ 1 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.30 | 0.59 | 0.89 | 1.19 | 1.49 | OC | 0.30 | 0.59 | 0.89 | 1.19 | 1.49 |
| OB | 0.30 | 0.59 | 0.89 | 1.19 | 1.49 | OD | 0.30 | 0.59 | 0.89 | 1.19 | 1.49 |

| | | | | | | | | | | |
|----|--------------------------------|---------|---------|---------|--------|-------|-------|------|------|------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 4740.85 | 4421.35 | 2666.32 | 1075.65 | 284.02 | 51.62 | 17.16 | 8.34 | 3.22 | 0.48 |
| OB | 4740.85 | 4421.35 | 2666.32 | 1075.65 | 284.02 | 51.62 | 17.16 | 8.34 | 3.22 | 0.48 |
| OC | 4740.85 | 4421.35 | 2666.32 | 1075.65 | 284.02 | 51.62 | 17.16 | 8.34 | 3.22 | 0.48 |
| OD | 4740.85 | 4421.35 | 2666.32 | 1075.65 | 284.02 | 51.62 | 17.16 | 8.34 | 3.22 | 0.48 |

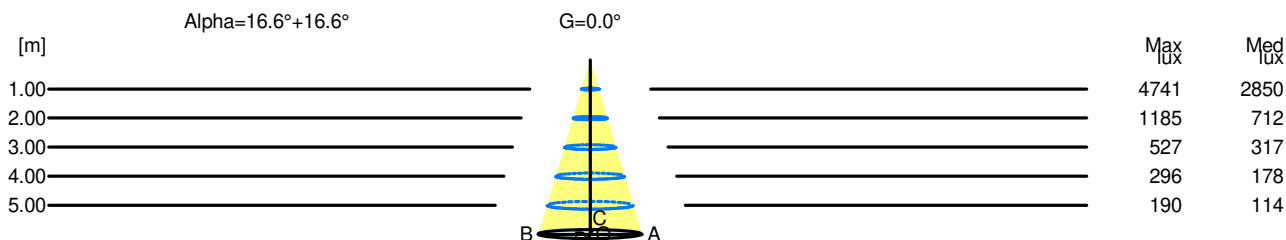

| H[m] | D[m] | Max lux | Med lux | Alpha=16.6°+16.6° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.59 | 4741 | 2850 | | |
| 2.00 | 1.19 | 1185 | 712 | | |
| 3.00 | 1.78 | 527 | 317 | | |
| 4.00 | 2.38 | 296 | 178 | | |
| 5.00 | 2.97 | 190 | 114 | | |