

## Luminaire

Code AN31618+M056807  
Name VECTOR 95 TRACK 927 SP DALI EUTRAC BR.COPPER + soft filter

## Measurem.

Code FTS2001557  
Name VECTOR 95 TRACK 927 SP DALI EUTRAC BR.COPPER + soft filter

Luminaire Flux	2092.20 lm	Luminaire Power	30.00 W	Efficacy	69.74 lm/W	Efficiency	100.00%
Lamps Flux	2092.20 lm	Maximum value	3090.82 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 95 mm Diam. 75 mm	Height 210 mm Height 0 mm					
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.001069 m2				
Coordinate system Date Measurement Distance	CG 01-04-2019 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 2092.20 lm				
LED Flux=3300lm LED Power=27.5W Eff=63% EfcLed=120lm/W EfcLum=70lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	97 99 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				


Diam=95mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

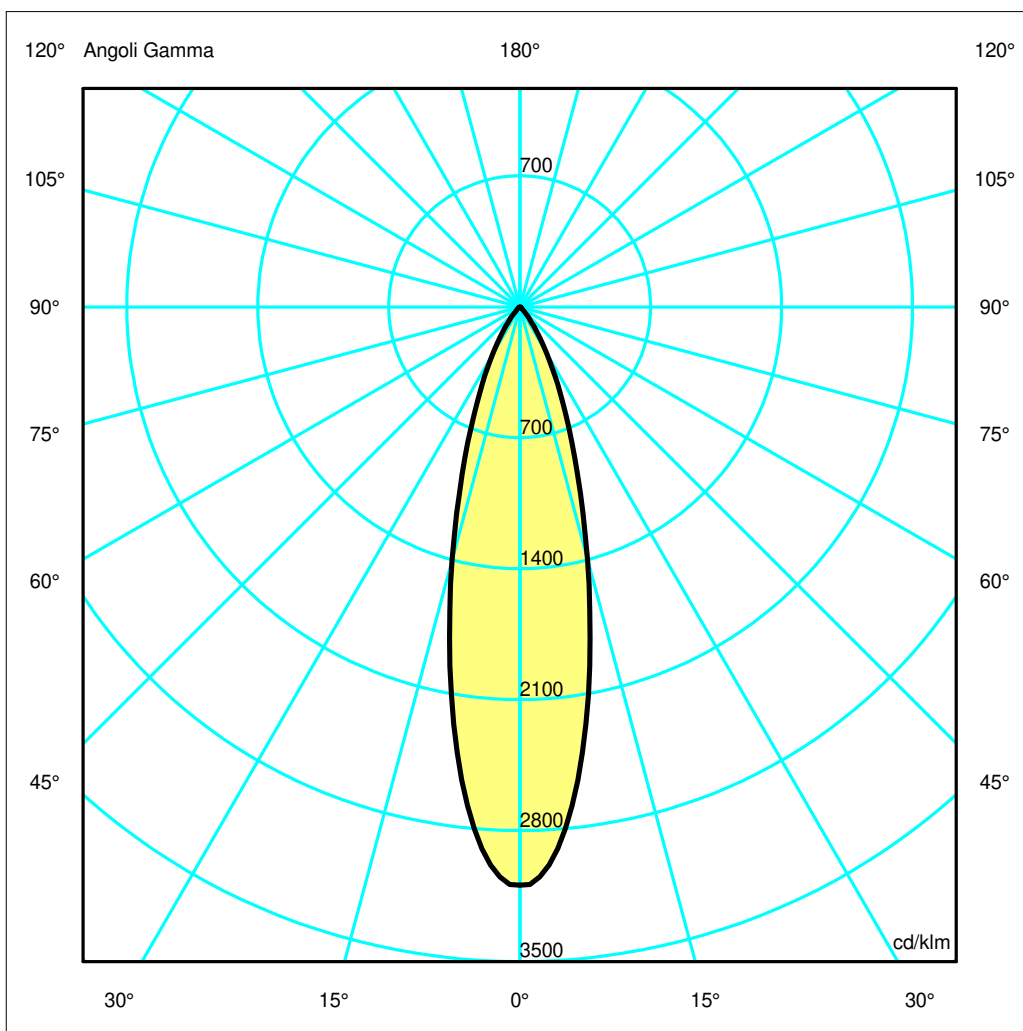

## Luminaire

Code AN31618+M056807  
Name VECTOR 95 TRACK 927 SP DALI EUTRAC BR.COPPER + soft filter

## Measur.


Code FTS2001557  
Name VECTOR 95 TRACK 927 SP DALI EUTRAC BR.COPPER + soft filter

Luminaire Flux	2092.20 lm	Luminaire Power	30.00 W	Efficacy	69.74 lm/W	Efficiency	100.00%
Lamps Flux	2092.20 lm	Maximum value	3090.82 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	95 mm 75 mm	Height Height	210 mm 0 mm		
Horizontal Luminous Area		0.004418 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001069 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		01-04-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2092.20 lm	
LED Flux=3300lm LED Power=27.5W Eff=63% EfcLed=120lm/W EfcLum=70lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	97 99 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.49	0.74	0.99	1.24	OC	0.25	0.49	0.74	0.99	1.24
OB	0.25	0.49	0.74	0.99	1.24	OD	0.25	0.49	0.74	0.99	1.24

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6466.62	5856.65	2923.45	1067.88	307.37	56.04	16.54	7.82	3.07	0.48
OB	6466.62	5856.65	2923.45	1067.88	307.37	56.04	16.54	7.82	3.07	0.48
OC	6466.62	5856.65	2923.45	1067.88	307.37	56.04	16.54	7.82	3.07	0.48
OD	6466.62	5856.65	2923.45	1067.88	307.37	56.04	16.54	7.82	3.07	0.48

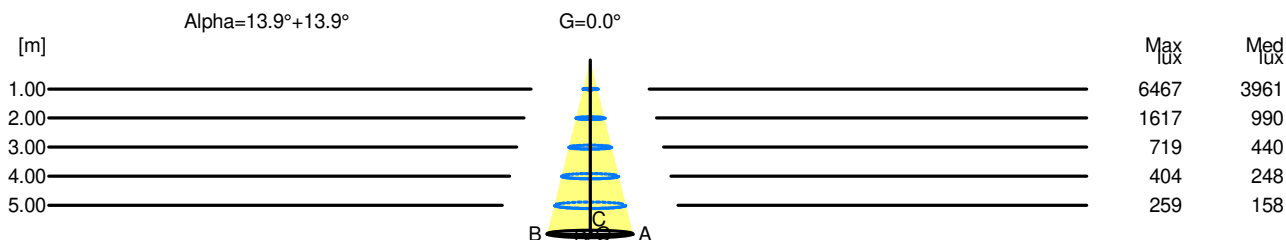

H[m]	D[m]	Max lux	Med lux	Alpha=13.9°+13.9°	G=0.0
1.00	0.49	6467	3961		
2.00	0.99	1617	990		
3.00	1.48	719	440		
4.00	1.98	404	248		
5.00	2.47	259	158		