

## Luminaire

Code BH08501+BH16104  
Name A.39 SHARP D+IND 1184 HB 34 400K ND BCO + COVER 3X4 OPT. HB BLACK

## Measurem.

Code FTS1900133-A  
Name A.39 SHARP D+IND 1184 HB 34 400K ND BCO + COVER 3X4 OPT. HB BLACK

Luminaire Flux	5521 lm	Luminaire Power	64.0 W	Efficacy	86.266 lm/W	Efficiency	100.00%
Source Flux	5521 lm	Maximum value	1165.47 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		03-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5521 lm	
LED Flux=7202lm LED Power=53W Eff=77% EfcLed=136lm/W EfcLum=86lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(17k)=102000h							
C.I.E.	99	100	100	44	100	D DIN 5040	C62
F UTE	--					B NBN	BZ 1

1184mm x 40mm




Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 55.70 %

DLOR 44.30 %

RN 55.70 %

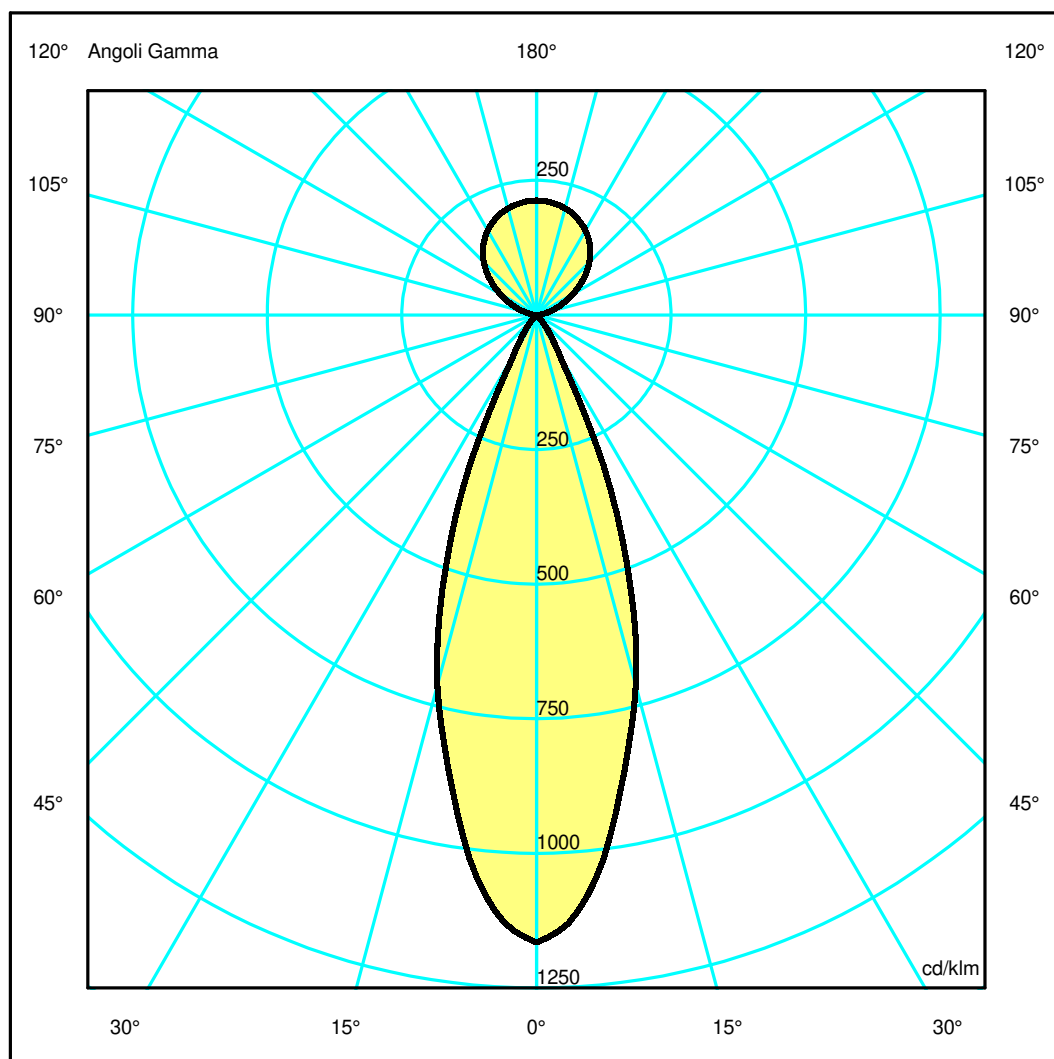

## Luminaire

Code BH08501+BH16104  
Name A.39 SHARP D+IND 1184 HB 34 400K ND BCO + COVER 3X4 OPT. HB BLACK

## Measurem.


Code FTS1900133-A  
Name A.39 SHARP D+IND 1184 HB 34 400K ND BCO + COVER 3X4 OPT. HB BLACK

Luminaire Flux	5521 lm	Luminaire Power	64.0 W	Efficacy	86.266 lm/W	Efficiency	100.00%
Source Flux	5521 lm	Maximum value	1165.47 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		03-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5521 lm	
LED Flux=7202lm LED Power=53W Eff=77% EfcLed=136lm/W EfcLum=86lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(17k)=102000h							
C.I.E.	99	100	100	44	100	D DIN 5040	C62
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.65	0.98	1.30	1.63	OC	0.33	0.65	0.98	1.30	1.63
OB	0.33	0.65	0.98	1.30	1.63	OD	0.33	0.65	0.98	1.30	1.63

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6434.55	5977.39	3930.52	1401.22	238.23	47.99	5.64	0.78	0.00	0.00
OB	6434.55	5977.39	3930.52	1401.22	238.23	47.99	5.64	0.78	0.00	0.00
OC	6434.55	5977.39	3930.52	1401.22	238.23	47.99	5.64	0.78	0.00	0.00
OD	6434.55	5977.39	3930.52	1401.22	238.23	47.99	5.64	0.78	0.00	0.00

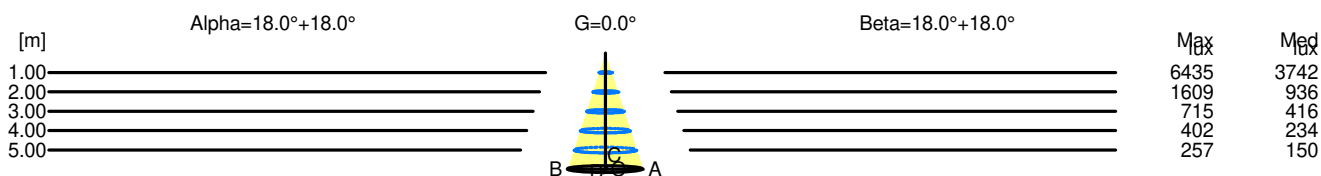

H[m]	D[m]	Max lux	Med lux	Alpha=18.0°+18.0°	G=0.0
1.00	0.65	6435	3742		
2.00	1.30	1609	936		
3.00	1.95	715	416		
4.00	2.60	402	234		
5.00	3.25	257	150		

H[m]	D[m]	Max lux	Med lux	Beta=18.0°+18.0°	G=0.0
1.00	0.65	6435	3742		
2.00	1.30	1609	936		
3.00	1.95	715	416		
4.00	2.60	402	234		
5.00	3.25	257	150		