

Luminaire

Code BH08905+BH16101
Name A.39 SHARP D+IND 1184 HB 54 400K ND SIL + COVER 3X4 OPT. HB WHITE

Measurem.

Code FTS1900427-A
Name A.39 SHARP D+IND 1184 HB 54 400K ND SIL + COVER 3X4 OPT. HB WHITE

Luminaire Flux	5639 lm	Luminaire Power	64.0 W	Efficacy	88.109 lm/W	Efficiency	100.00%
Source Flux	5639 lm	Maximum value	639.45 cd/klm	Position	C=0.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		03-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5639 lm	
LED Flux=7202lm LED Power=53W Eff=78% EfcLed=136lm/W EfcLum=88lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(17k)=102000h							
C.I.E.	97 99 100 45 100			D DIN 5040		C62	
F UTE	--			B NBN		BZ 1	

1184mm x 40mm




Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 54.53 %

DLOR 45.47 %

RN 54.53 %

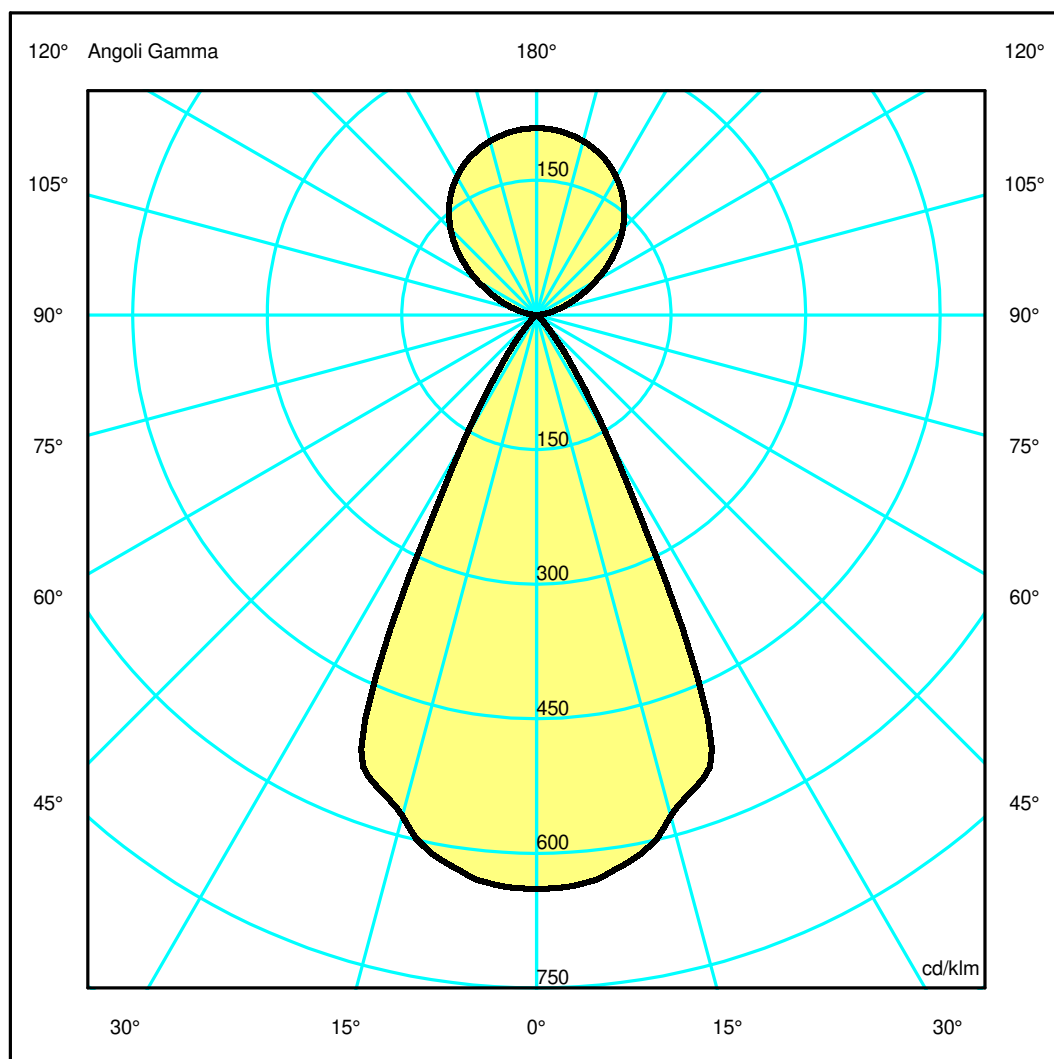

Luminaire

Code BH08905+BH16101
Name A.39 SHARP D+IND 1184 HB 54 400K ND SIL + COVER 3X4 OPT. HB WHITE

Measurement


Code FTS1900427-A
Name A.39 SHARP D+IND 1184 HB 54 400K ND SIL + COVER 3X4 OPT. HB WHITE

Luminaire Flux	5639 lm	Luminaire Power	64.0 W	Efficacy	88.109 lm/W	Efficiency	100.00%
Source Flux	5639 lm	Maximum value	639.45 cd/klm	Position	C=0.00 G=1.00	CG Double Symmetrical	
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	444 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.016428 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003974 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		03-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5639 lm	
LED Flux=7202lm LED Power=53W Eff=78% EfcLed=136lm/W EfcLum=88lm/W CCT=4000K Ra=90 R9=50 SDCM=2 L70(17k)=102000h							
C.I.E.	97 99 100 45 100			D DIN 5040	C62		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.45	OC	0.49	0.98	1.47	1.96	2.45
OB	0.49	0.98	1.47	1.96	2.45	OD	0.49	0.98	1.47	1.96	2.45

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3605.86	3580.13	3258.88	2169.45	397.55	69.10	16.19	10.35	6.79	2.53
OB	3605.86	3580.13	3258.88	2169.45	397.55	69.10	16.19	10.35	6.79	2.53
OC	3605.86	3580.13	3258.88	2169.45	397.55	69.10	16.19	10.35	6.79	2.53
OD	3605.86	3580.13	3258.88	2169.45	397.55	69.10	16.19	10.35	6.79	2.53

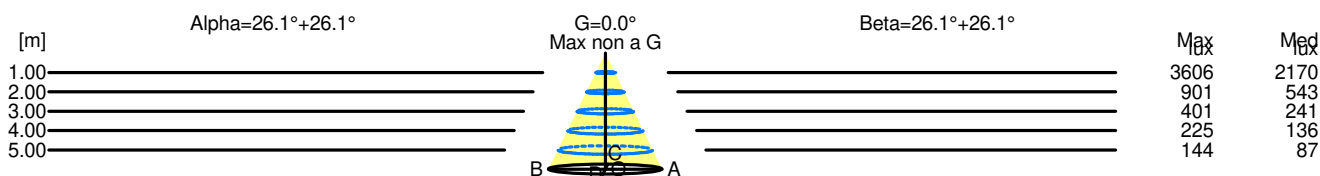

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0 Max non a G
1.00	0.98	3606	2170		
2.00	1.96	901	543		
3.00	2.94	401	241		
4.00	3.91	225	136		
5.00	4.89	144	87		

H[m]	D[m]	Max lux	Med lux	Beta=26.1°+26.1°	G=0.0 Max non a G
1.00	0.98	3606	2170		
2.00	1.96	901	543		
3.00	2.94	401	241		
4.00	3.91	225	136		
5.00	4.89	144	87		