

Luminaire


Code AF31604+AF95001
Name SHARP SMD.1X 3W 940 FL EXD NRO+ SCREEN 1X WHITE

Measurement

Code FTS1902074
Name SHARP SMD.1X 3W 940 FL EXD NRO+ SCREEN 1X WHITE

| | | | | | | | |
|---|--------|-----------------|----------------|-----------------------------|---------------|--------------------|---------|
| Luminaire Flux | 215 lm | Luminaire Power | 3.5 W | Efficacy | 61.457 lm/W | Efficiency | 100.00% |
| Source Flux | 215 lm | Maximum value | 5541.55 cd/klm | Position | C=0.00 G=0.00 | CG Rotosymmetrical | |
| Rectangular Luminaire | | Length | 41 mm | Width | 45 mm | Height | 90 mm |
| Rectangular Luminous Area | | Length | 37 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.001369 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000331 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 21-02-2017 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 215 lm | |
| LED Flux=283.995lm LED Power=3.5W Eff=76% EfcLed=81lm/W EfcLum=61lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |


41mm x 45mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

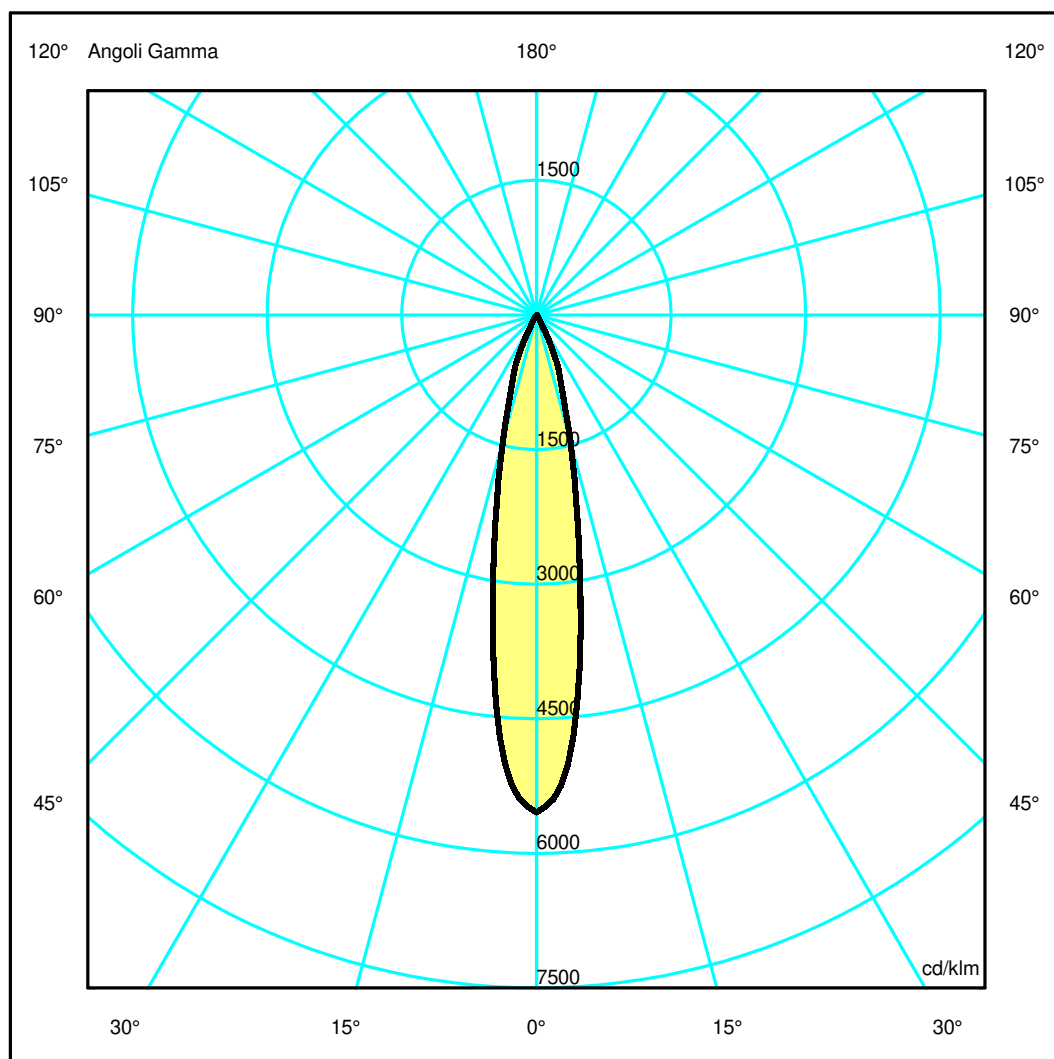

Luminaire

Code AF31604+AF95001
Name SHARP SMD.1X 3W 940 FL EXD NRO+ SCREEN 1X WHITE

Measurem.


Code FTS1902074
Name SHARP SMD.1X 3W 940 FL EXD NRO+ SCREEN 1X WHITE

| | | | | | | | |
|---|--------|-----------------|----------------|-----------------------------|---------------|--------------------|---------|
| Luminaire Flux | 215 lm | Luminaire Power | 3.5 W | Efficacy | 61.457 lm/W | Efficiency | 100.00% |
| Source Flux | 215 lm | Maximum value | 5541.55 cd/klm | Position | C=0.00 G=0.00 | CG Rotosymmetrical | |
| Rectangular Luminaire | | Length | 41 mm | Width | 45 mm | Height | 90 mm |
| Rectangular Luminous Area | | Length | 37 mm | Width | 37 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.001369 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000331 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 21-02-2017 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 215 lm | |
| LED Flux=283.995lm LED Power=3.5W Eff=76% EfcLed=81lm/W EfcLum=61lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.18 | 0.35 | 0.53 | 0.70 | 0.88 | OC | 0.18 | 0.35 | 0.53 | 0.70 | 0.88 |
| OB | 0.18 | 0.35 | 0.53 | 0.70 | 0.88 | OD | 0.18 | 0.35 | 0.53 | 0.70 | 0.88 |

| | | | | | | | | | | | |
|----|---------|---------|--------|--------------------------------|------|------|------|------|------|------|--|
| | | | | Luminous Intensities [cd/klm] | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 | |
| OA | 1191.99 | 1014.39 | 312.95 | 85.57 | 5.37 | 1.51 | 0.53 | 0.34 | 0.24 | 0.11 | |
| OB | 1191.99 | 1014.39 | 312.95 | 85.57 | 5.37 | 1.51 | 0.53 | 0.34 | 0.24 | 0.11 | |
| OC | 1191.99 | 1014.39 | 312.95 | 85.57 | 5.37 | 1.51 | 0.53 | 0.34 | 0.24 | 0.11 | |
| OD | 1191.99 | 1014.39 | 312.95 | 85.57 | 5.37 | 1.51 | 0.53 | 0.34 | 0.24 | 0.11 | |

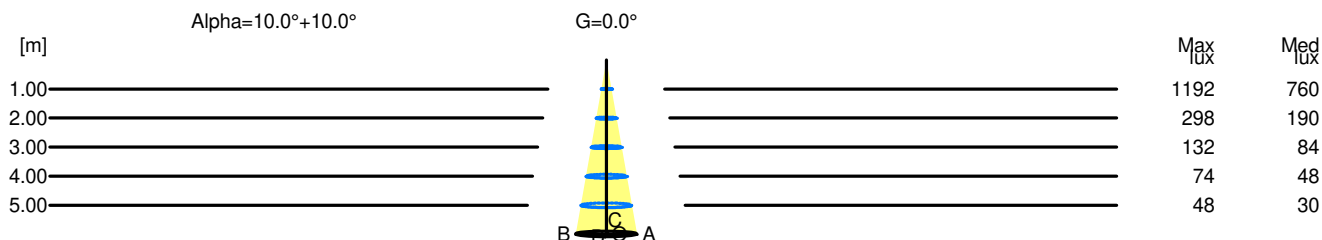

| H[m] | D[m] | Max lux | Med lux | Alpha=10.0°+10.0° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.35 | 1192 | 760 | | |
| 2.00 | 0.70 | 298 | 190 | | |
| 3.00 | 1.05 | 132 | 84 | | |
| 4.00 | 1.41 | 74 | 48 | | |
| 5.00 | 1.76 | 48 | 30 | | |