

Luminaire

Code BB00300_25+M239200
Name LUCERI TLESS ROUND 25W 930 COMFORT + schermo trasparente

Measurement

Code FTS1801239-A
Name LUCERI TLESS ROUND 25W 930 COMFORT + schermo trasparente

Luminaire Flux	2641 lm	Luminaire Power	25.0 W	Efficacy	105.640 lm/W	Efficiency	100.00%
Source Flux	2641 lm	Maximum value	690.16 cd/klm	Position	C=0.00 G=8.00	CG	Rotosymmetrical
Round Luminaire		Diam.	211 mm	Height	215 mm		
Round Luminous Area		Diam.	209 mm	Height	0 mm		
Horizontal Luminous Area		0.034307 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008300 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2641 lm	
LED Flux=3416lm LED Power=25W Eff=77% EfcLed=137lm/W EfcLum=106lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	76 93 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 1 / BZ 2		

Diam=211mm




Semipiani C

180.0 — 0.0

ULOR 0.02 %

DLOR 99.98 %

RN 0.02 %

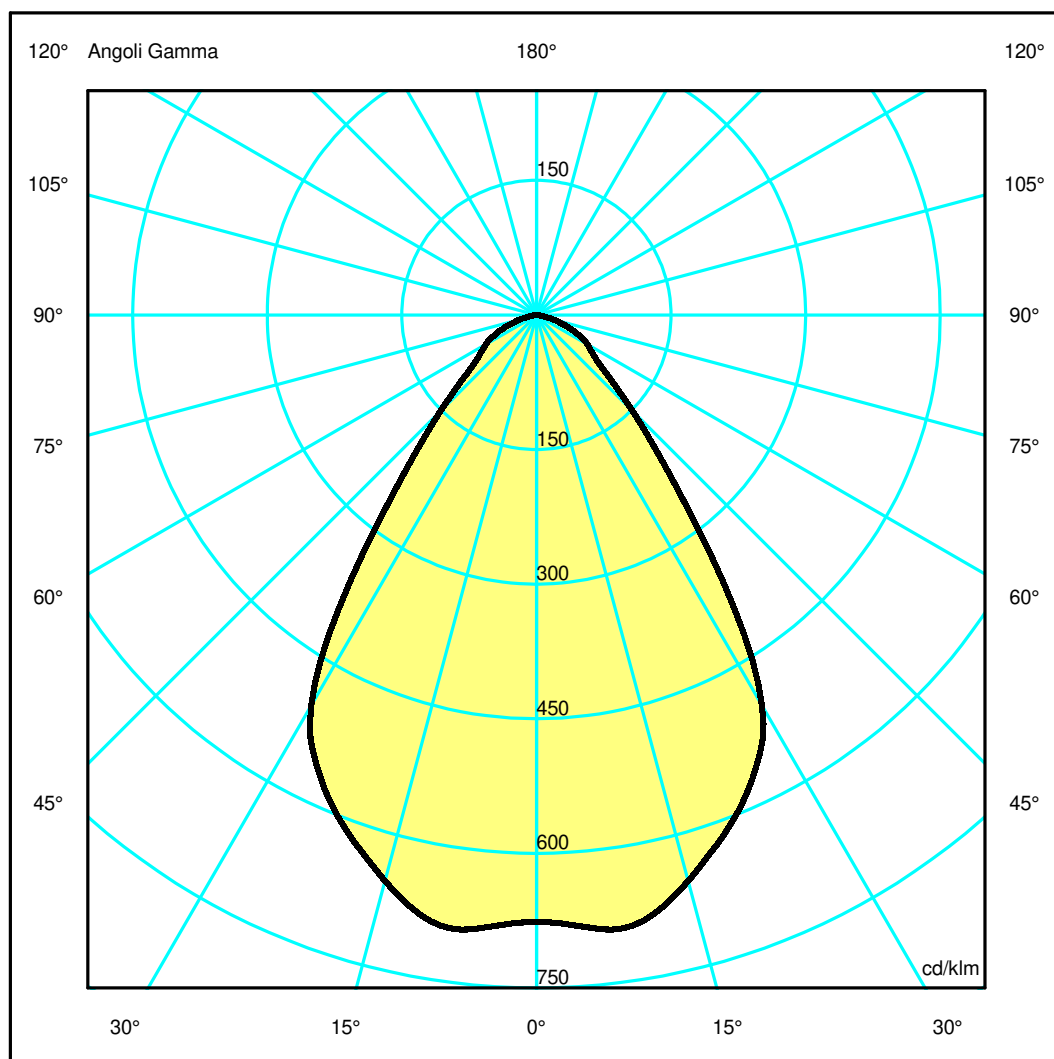

Luminaire

Code BB00300_25+M239200
Name LUCERI TLESS ROUND 25W 930 COMFORT + schermo trasparente

Measurem.


Code FTS1801239-A
Name LUCERI TLESS ROUND 25W 930 COMFORT + schermo trasparente

Luminaire Flux	2641 lm	Luminaire Power	25.0 W	Efficacy	105.640 lm/W	Efficiency	100.00%
Source Flux	2641 lm	Maximum value	690.16 cd/klm	Position	C=0.00 G=8.00	CG Rotosymmetrical	
Round Luminaire		Diam.	211 mm	Height	215 mm		
Round Luminous Area		Diam.	209 mm	Height	0 mm		
Horizontal Luminous Area		0.034307 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008300 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2641 lm	
LED Flux=3416lm LED Power=25W Eff=77% EfcLed=137lm/W EfcLum=106lm/W CCT=3000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	76 93 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 1 / BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.71	1.43	2.14	2.86	3.57	OC	0.71	1.43	2.14	2.86	3.57
OB	0.71	1.43	2.14	2.86	3.57	OD	0.71	1.43	2.14	2.86	3.57

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1785.91	1810.50	1724.04	1503.78	955.52	401.09	204.76	134.81	51.57	6.86
OB	1785.91	1810.50	1724.04	1503.78	955.52	401.09	204.76	134.81	51.57	6.86
OC	1785.91	1810.50	1724.04	1503.78	955.52	401.09	204.76	134.81	51.57	6.86
OD	1785.91	1810.50	1724.04	1503.78	955.52	401.09	204.76	134.81	51.57	6.86

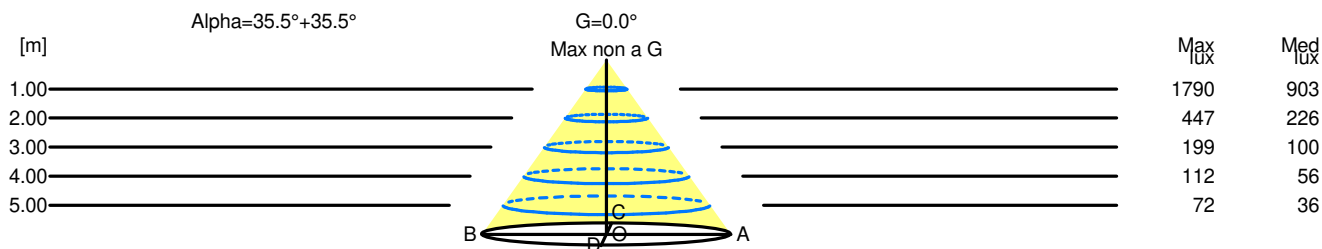

H[m]	D[m]	Max lux	Med lux	Alpha=35.5°+35.5°	G=0.0 Max non a G
1.00	1.43	1790	903		
2.00	2.86	447	226		
3.00	4.28	199	100		
4.00	5.71	112	56		
5.00	7.14	72	36		