

Luminaire

Code BB12101_25+M239700
Name LUCERI Q TRIM 25W 940 MIRROR + schermo opalino


Measurem.

Code FTS1801310-A
Name LUCERI Q TRIM 25W 940 MIRROR + schermo opalino

Luminaire Flux	2339 lm	Luminaire Power	25.0 W	Efficacy	93.560 lm/W	Efficiency	100.00%
Source Flux	2339 lm	Maximum value	431.21 cd/klm	Position	C=45.00 G=1.00	CG Double Symmetrical	
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	184 mm	Width	184 mm	Height	0 mm
Horizontal Luminous Area		0.033856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008191 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2339 lm	
LED Flux=3454lm LED Power=25W Eff=68% EfcLed=138lm/W EfcLum=94lm/W CCT=4000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	52 82 96 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		



ULOR 0.04 %
DLOR 99.96 %
RN 0.04 %

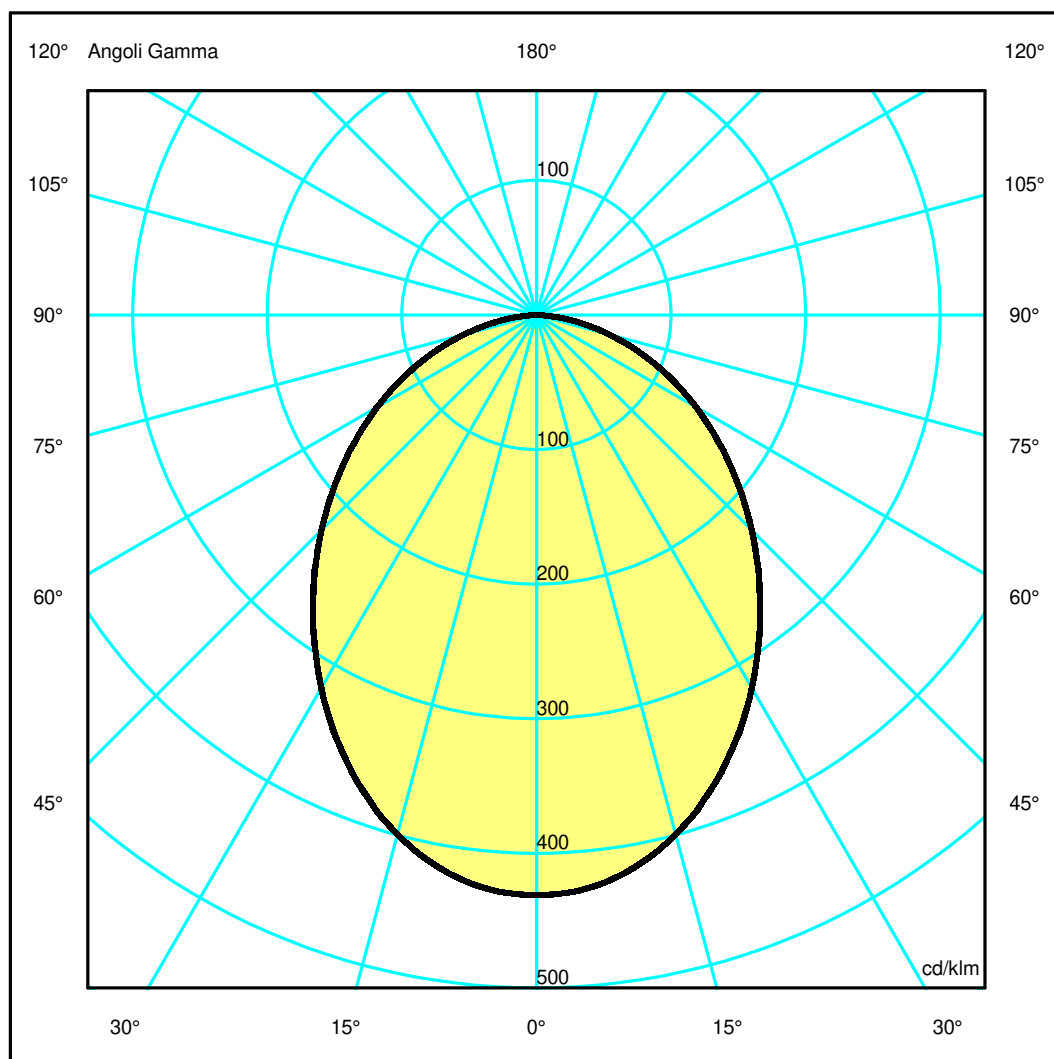

Luminaire

Code BB12101_25+M239700
Name LUCERI Q TRIM 25W 940 MIRROR + schermo opalino

Measurem.


Code FTS1801310-A
Name LUCERI Q TRIM 25W 940 MIRROR + schermo opalino

Luminaire Flux	2339 lm	Luminaire Power	25.0 W	Efficacy	93.560 lm/W	Efficiency	100.00%
Source Flux	2339 lm	Maximum value	431.21 cd/klm	Position	C=45.00 G=1.00	CG Double Symmetrical	
Rectangular Luminaire		Length	188 mm	Width	188 mm	Height	238 mm
Rectangular Luminous Area		Length	184 mm	Width	184 mm	Height	0 mm
Horizontal Luminous Area		0.033856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.008191 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		25-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2339 lm	
LED Flux=3454lm LED Power=25W Eff=68% EfcLed=138lm/W EfcLum=94lm/W CCT=4000K Ra=90 R9=50 SDCM=1 L70(9k)=50000h							
C.I.E.	52 82 96 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 4		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.06	2.12	3.18	4.24	5.30	OC	1.06	2.12	3.18	4.24	5.30
OB	1.06	2.12	3.18	4.24	5.30	OD	1.06	2.12	3.18	4.24	5.30

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1008.16	1000.18	934.10	817.93	676.36	529.09	386.47	254.78	131.36	29.64
OB	1008.16	1000.18	934.10	817.93	676.36	529.09	386.47	254.78	131.36	29.64
OC	1008.16	1000.51	934.57	817.26	675.29	528.37	386.77	255.65	131.42	28.76
OD	1008.16	1000.51	934.57	817.26	675.29	528.37	386.77	255.65	131.42	28.76

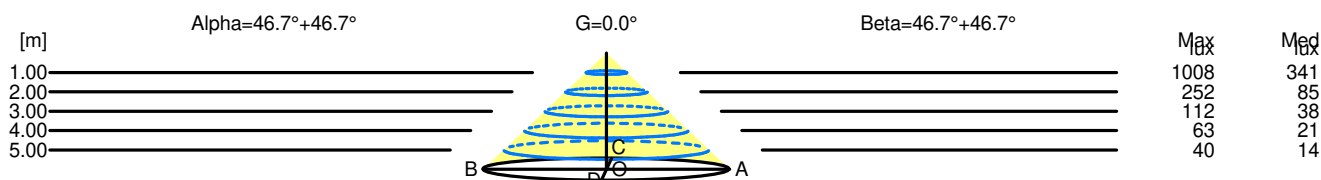

H[m]	D[m]	Max lux	Med lux	Alpha=46.7°+46.7°	G=0.0
1.00	2.12	1008	341		
2.00	4.24	252	85		
3.00	6.36	112	38		
4.00	8.48	63	21		
5.00	10.60	40	14		

H[m]	D[m]	Max lux	Med lux	Beta=46.7°+46.7°	G=0.0
1.00	2.12	1008	341		
2.00	4.24	252	85		
3.00	6.36	112	38		
4.00	8.49	63	21		
5.00	10.61	40	14		