

## Luminaire


Code CB06001  
Name GOPLE TRACK16 1180 TRK/STRIP BCO

## Measurement

Code FTS2200161-A  
Name GOPLE TRACK16 1180 TRK/STRIP BCO

Luminaire Flux	1704 lm	Luminaire Power	16.0 W	Efficacy	106.500 lm/W	Efficiency	100.00%
Source Flux	1704 lm	Maximum value	503.92 cd/klm	Position	C=40.00 G=179.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1180 mm	Width	50 mm	Height	45 mm
Rectangular Luminous Area		Length	588 mm	Width	17 mm	Height	0 mm
Horizontal Luminous Area		0.009996 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002418 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		01-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1704 lm	
LED Flux=2488lm LED Power=14W Eff=68% EfcLed=183lm/W EfcLum=107lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	0 0 0 0 100			D DIN 5040	--		
F UTE	1.00 T			B NBN	BZ 10		

1180mm x 50mm




Semipiani C

180.0 — 0.0  
270.0 — 90.0

ULOR 99.99 %

DLOR 0.01 %

RN 99.99 %

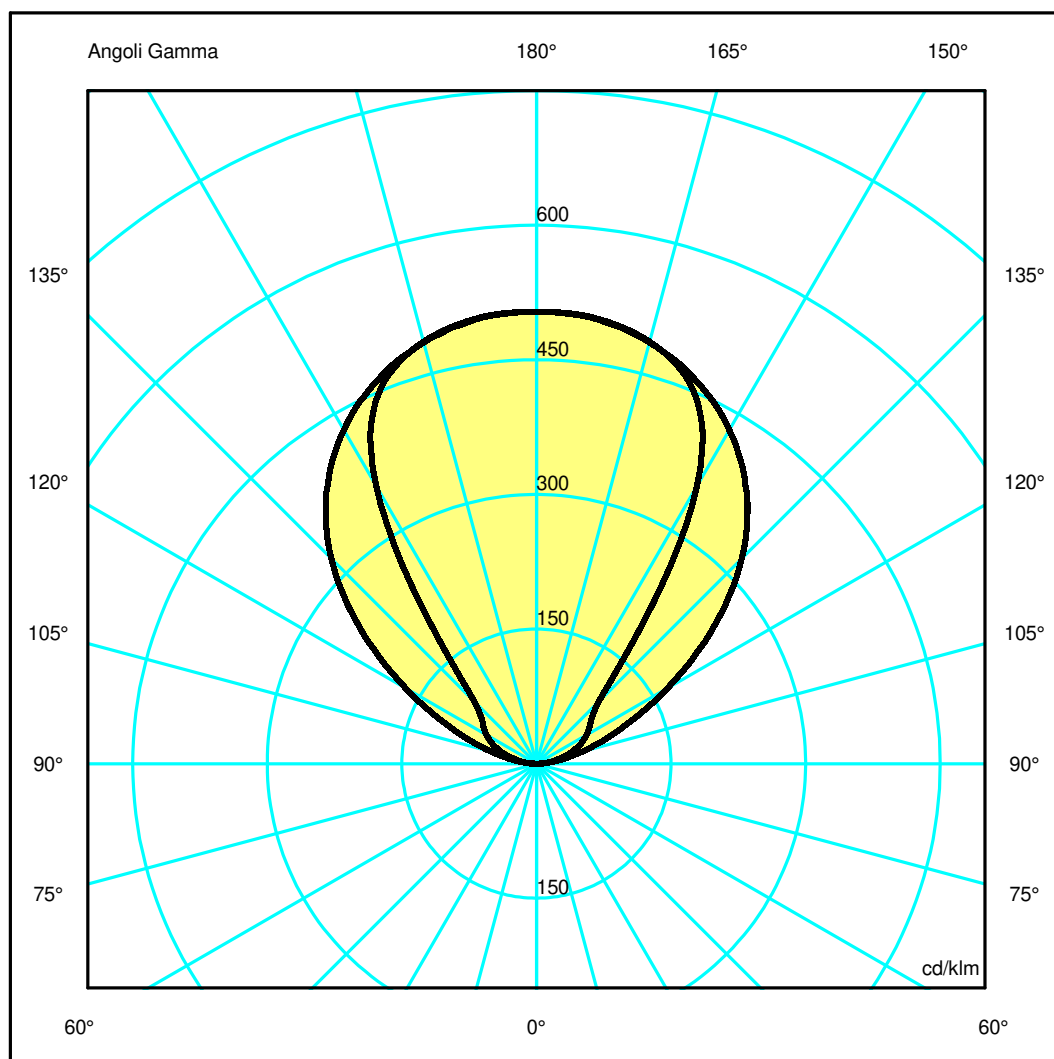

## Luminaire

Code CB06001  
Name GOPLE TRACK16 1180 TRK/STRIP BCO

## Measurerm.


Code FTS2200161-A  
Name GOPLE TRACK16 1180 TRK/STRIP BCO

Luminaire Flux	1704 lm	Luminaire Power	16.0 W	Efficacy	106.500 lm/W	Efficiency	100.00%
Source Flux	1704 lm	Maximum value	503.92 cd/klm	Position	C=40.00 G=179.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1180 mm	Width	50 mm	Height	45 mm
Rectangular Luminous Area		Length	588 mm	Width	17 mm	Height	0 mm
Horizontal Luminous Area		0.009996 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002418 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		01-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1704 lm	
LED Flux=2488lm LED Power=14W Eff=68% EfcLed=183lm/W EfcLum=107lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	0 0 0 0 100			D DIN 5040	--		
F UTE	1.00 T			B NBN	BZ 10		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.69	1.38	2.07	2.77	3.46	OC	1.28	2.57	3.85	5.13	6.41
OB	0.69	1.38	2.07	2.77	3.46	OD	1.28	2.57	3.85	5.13	6.41

	0	5	15	25	35	45	55	65	75	85
OA	858.28	857.15	829.73	734.57	415.13	167.90	122.90	94.35	55.51	17.29
OB	858.28	857.15	829.73	734.57	415.13	167.90	122.90	94.35	55.51	17.29
OC	858.28	855.89	828.12	771.69	683.29	550.96	375.57	207.38	90.97	21.69
OD	858.28	855.89	828.12	771.69	683.29	550.96	375.57	207.38	90.97	21.69

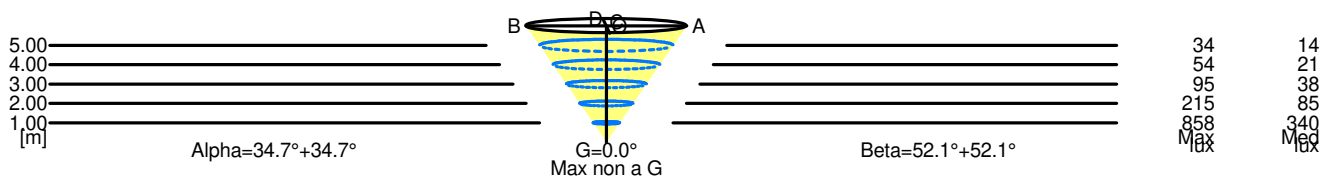

5.00	6.91	34	14		
4.00	5.53	54	21		
3.00	4.15	95	38		
2.00	2.77	215	85		
1.00	1.38	858	340		
H[m]	D[m]	Max lux	Med lux	Alpha=34.7°+34.7°	Max non a G G=0.0°

5.00	12.83	34	14		
4.00	10.26	54	21		
3.00	7.70	95	38		
2.00	5.13	215	85		
1.00	2.57	858	340		
H[m]	D[m]	Max lux	Med lux	Beta=52.1°+52.1°	Max non a G G=0.0°