

## Luminaire

Code KZ51004+AP90300  
Name kata metron pst spt 2x40 Dali 930 SP nro + Soft Filter

## Measurem.

Code FTS2400445  
Name kata metron pst spt 2x40 Dali 930 SP nro + Soft Filter

Luminaire Flux	452 lm	Luminaire Power	9.5 W	Efficacy	47.579 lm/W	Efficiency	100.00%
Source Flux	452 lm	Maximum value	5632.00 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area		0.000855 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000207 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		452 lm	
LED Flux=698lm LED Power=8.4W Eff=65% EfcLed=83lm/W EfcLum=48lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 100 100 100 100			D DIN 5040		A60	
F UTE	--			B NBN		BZ 1	


40mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

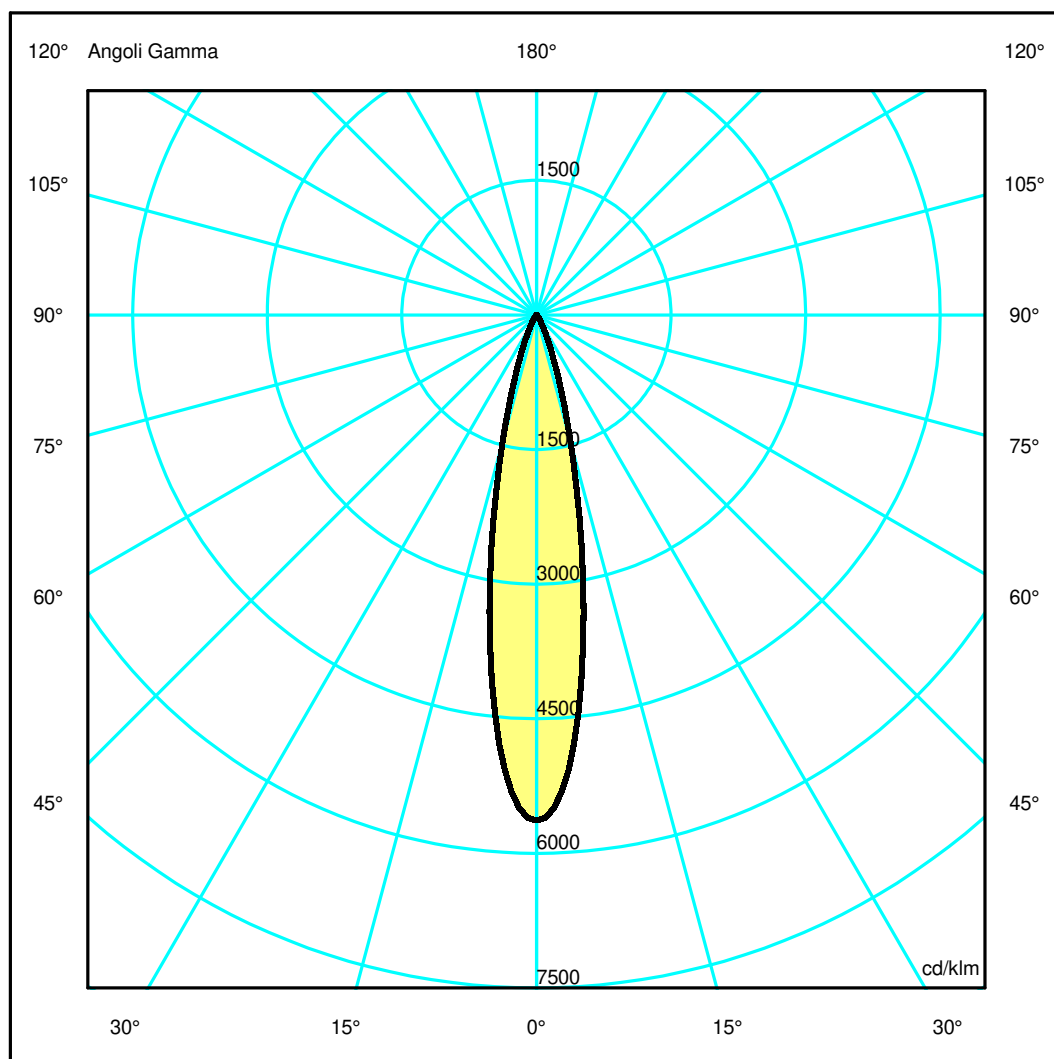

## Luminaire

Code KZ51004+AP90300  
Name kata metron pst spt 2x40 Dali 930 SP nro + Soft Filter

## Measurem.


Code FTS2400445  
Name kata metron pst spt 2x40 Dali 930 SP nro + Soft Filter

Luminaire Flux	452 lm	Luminaire Power	9.5 W	Efficacy	47.579 lm/W	Efficiency	100.00%
Source Flux	452 lm	Maximum value	5632.00 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area		0.000855 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000207 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		452 lm	
LED Flux=698lm LED Power=8.4W Eff=65% EfcLed=83lm/W EfcLum=48lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	98 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.37	0.55	0.74	0.92	OC	0.18	0.37	0.55	0.74	0.92
OB	0.18	0.37	0.55	0.74	0.92	OD	0.18	0.37	0.55	0.74	0.92

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2545.66	2167.45	659.86	119.49	24.56	6.59	2.34	1.28	0.63	0.24
OB	2545.66	2167.45	659.86	119.49	24.56	6.59	2.34	1.28	0.63	0.24
OC	2545.66	2167.45	659.86	119.49	24.56	6.59	2.34	1.28	0.63	0.24
OD	2545.66	2167.45	659.86	119.49	24.56	6.59	2.34	1.28	0.63	0.24

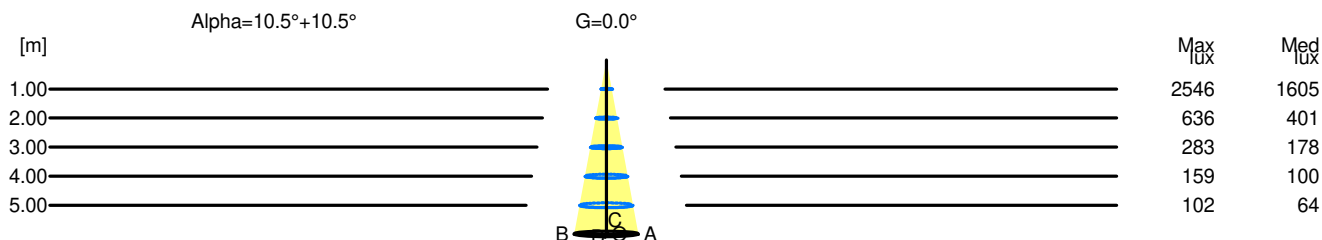

H[m]	D[m]	Max lux	Med lux	Alpha=10.5°+10.5°	G=0.0
1.00	0.37	2546	1605		
2.00	0.74	636	401		
3.00	1.11	283	178		
4.00	1.48	159	100		
5.00	1.85	102	64		