

Luminaire


Code WW11118
Name WALL WASHER A.24 600 3000K BCP

Measur.

Code FTS2600114
Name WALL WASHER A.24 600 3000K BCP

| | | | | | | | |
|--|-----------------|-----------------|---------------|-----------------------------|--------------------|--------------|--------------|
| Luminaire Flux | 888 lm | Luminaire Power | 11.0 W | Efficacy | 80.727 lm/W | Efficiency | 100.00% |
| Source Flux | 888 lm | Maximum value | 824.66 cd/klm | Position | C=180.00 G=14.00 | CG | Asymmetrical |
| Rectangular Luminaire | | Length | 615 mm | Width | 40 mm | Height | 78 mm |
| Rectangular Luminous Area | | Length | 615 mm | Width | 30 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.018450 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.004463 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Asymmetrical | |
| Date | | 02-03-2026 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 888 lm | |
| LED Flux=1475lm LED Power=10W Eff=60% EfcLed=148lm/W EfcLum=85lm/W CCT=3000K Ra=90 SDCM=3 L70(6k)=50000h | | | | | | | |
| C.I.E. | 58 82 93 93 100 | | | D DIN 5040 | A41 | | |
| F UTE | 0.93 D + 0.07 T | | | B NBN | BZ 3 / 1.25 / BZ 4 | | |

615mm x 40mm




Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 7.02 %

DLOR 92.98 %

RN 7.02 %

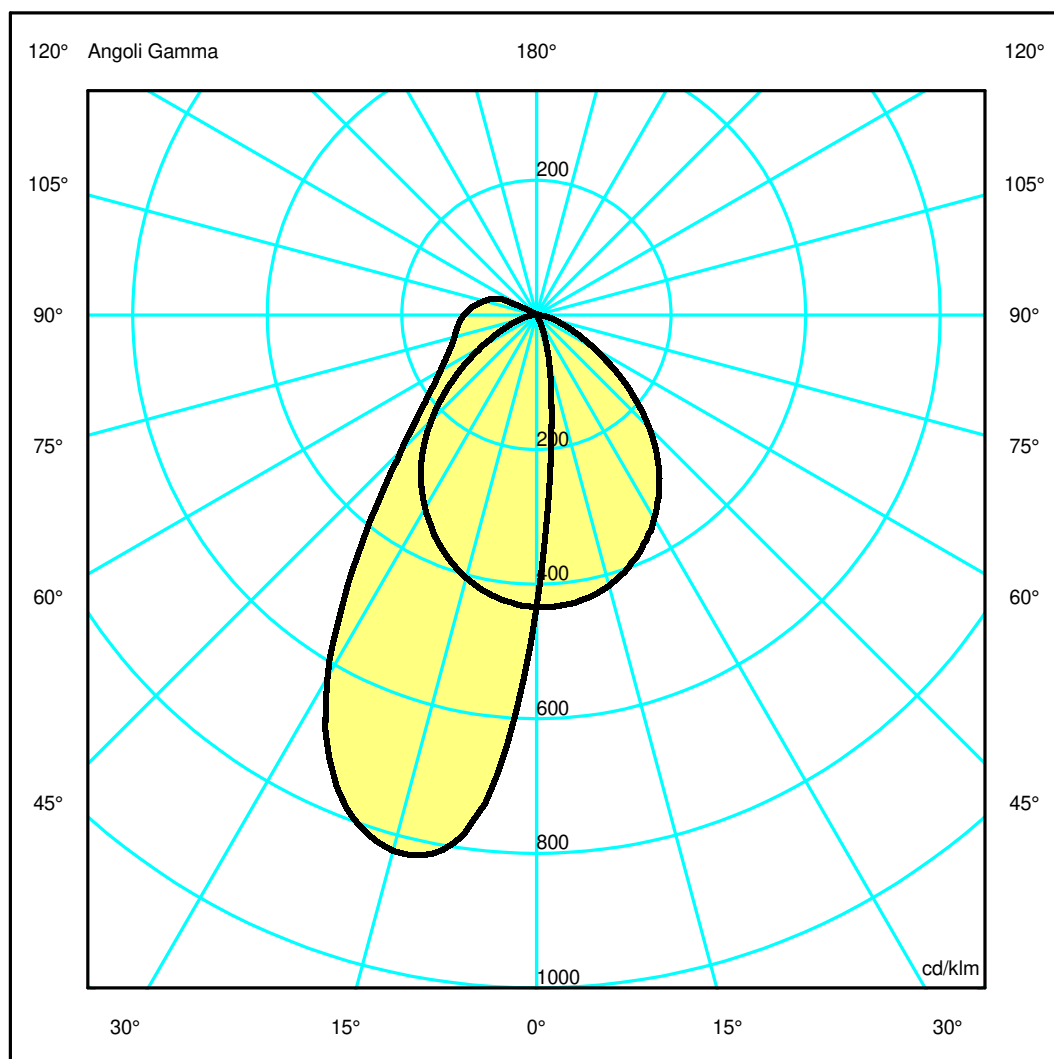

Luminaire

Code WW111118
Name WALL WASHER A.24 600 3000K BCP

Measur.


Code FTS2600114
Name WALL WASHER A.24 600 3000K BCP

| | | | | | | | |
|--|-----------------|-----------------|---------------|-----------------------------|--------------------|--------------|--------------|
| Luminaire Flux | 888 lm | Luminaire Power | 11.0 W | Efficacy | 80.727 lm/W | Efficiency | 100.00% |
| Source Flux | 888 lm | Maximum value | 824.66 cd/klm | Position | C=180.00 G=14.00 | CG | Asymmetrical |
| Rectangular Luminaire | | Length | 615 mm | Width | 40 mm | Height | 78 mm |
| Rectangular Luminous Area | | Length | 615 mm | Width | 30 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.018450 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.004463 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Asymmetrical | |
| Date | | 02-03-2026 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 888 lm | |
| LED Flux=1475lm LED Power=10W Eff=60% EfcLed=148lm/W EfcLum=85lm/W CCT=3000K Ra=90 SDCM=3 L70(6k)=50000h | | | | | | | |
| C.I.E. | 58 82 93 93 100 | | | D DIN 5040 | A41 | | |
| F UTE | 0.93 D + 0.07 T | | | B NBN | BZ 3 / 1.25 / BZ 4 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.26 | 0.51 | 0.77 | 1.03 | 1.29 | OC | 1.08 | 2.17 | 3.25 | 4.34 | 5.42 |
| OB | 0.53 | 1.07 | 1.60 | 2.14 | 2.67 | OD | 1.08 | 2.16 | 3.24 | 4.32 | 5.41 |

| | | | | | | | | | | |
|----|---------------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 385.25 | 205.76 | 62.78 | 12.51 | 0.62 | 0.50 | 0.47 | 0.56 | 0.64 | 0.69 |
| OB | 385.25 | 612.38 | 731.81 | 646.37 | 434.76 | 252.62 | 168.61 | 131.14 | 112.09 | 101.93 |
| OC | 385.25 | 384.64 | 369.59 | 333.84 | 281.43 | 210.01 | 126.32 | 58.98 | 25.25 | 7.01 |
| OD | 385.25 | 380.75 | 359.15 | 320.01 | 265.37 | 196.78 | 118.80 | 56.03 | 23.96 | 6.25 |

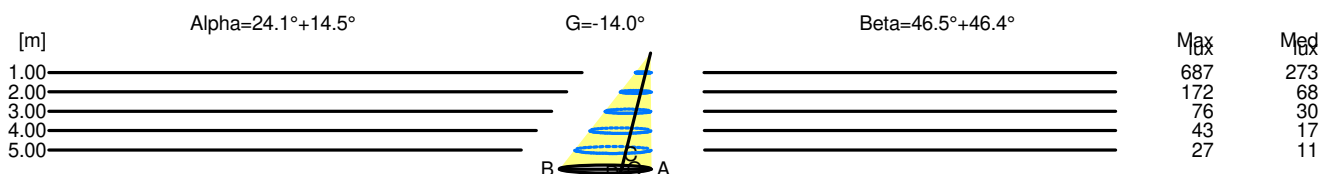

| H[m] | D[m] | Max lux | Med lux | Alpha=24.1°+14.5° | G=-14.0 |
|------|------|---------|---------|-------------------|---------|
| 1.00 | 0.79 | 687 | 273 | | |
| 2.00 | 1.58 | 172 | 68 | | |
| 3.00 | 2.38 | 76 | 30 | | |
| 4.00 | 3.17 | 43 | 17 | | |
| 5.00 | 3.96 | 27 | 11 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=46.4°+46.5° | G=0.0 |
|------|-------|---------|---------|------------------|-------|
| 1.00 | 2.17 | 687 | 273 | | |
| 2.00 | 4.33 | 172 | 68 | | |
| 3.00 | 6.50 | 76 | 30 | | |
| 4.00 | 8.66 | 43 | 17 | | |
| 5.00 | 10.83 | 27 | 11 | | |