

## Luminaire

Code AX01104  
Name HELGOLAND 60 FIX 3500K SP NRO

## Measurem.

Code FTS2500094  
Name HELGOLAND 60 FIX 3500K SP NRO

Luminaire Flux	319 lm	Luminaire Power	2.6 W	Efficacy	122.692 lm/W	Efficiency	100.00%
Source Flux	319 lm	Maximum value	3592.35 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	60 mm	Height	12 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area		0.001075 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000260 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		319 lm	
LED Flux=456lm LED Power=2.6W Eff=70% EfcLed=175lm/W EfcLum=123lm/W CCT=3500K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		


Diam=60mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

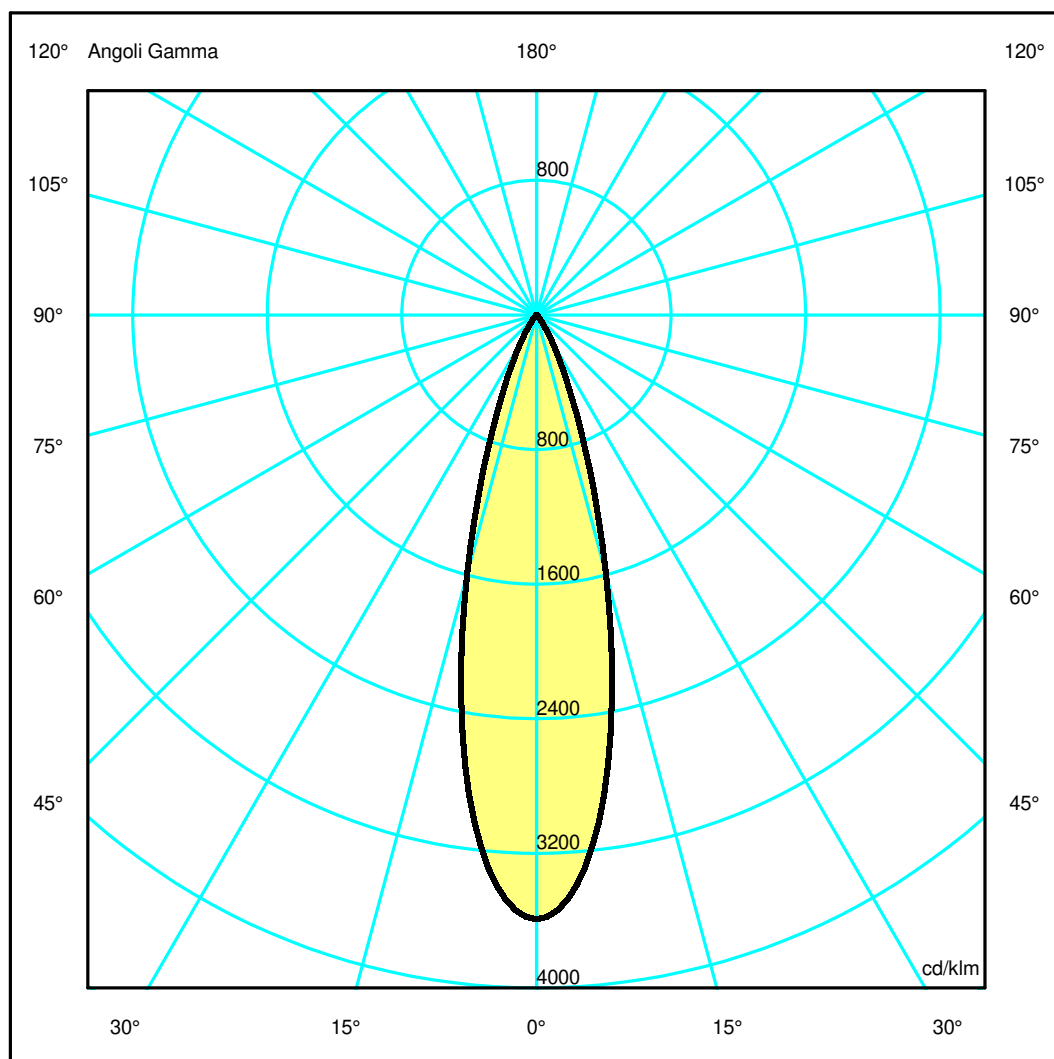

## Luminaire

Code AX01104  
Name HELGOLAND 60 FIX 3500K SP NRO

## Measurem.


Code FTS2500094  
Name HELGOLAND 60 FIX 3500K SP NRO

Luminaire Flux	319 lm	Luminaire Power	2.6 W	Efficacy	122.692 lm/W	Efficiency	100.00%
Source Flux	319 lm	Maximum value	3592.35 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Round Luminaire		Diam.	60 mm	Height	12 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area		0.001075 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000260 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		319 lm	
LED Flux=456lm LED Power=2.6W Eff=70% EfcLed=175lm/W EfcLum=123lm/W CCT=3500K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.49	0.74	0.99	1.24	OC	0.25	0.49	0.74	0.99	1.24
OB	0.25	0.49	0.74	0.99	1.24	OD	0.25	0.49	0.74	0.99	1.24

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1145.96	1051.92	508.96	130.52	24.87	4.70	2.14	1.12	0.62	0.20
OB	1145.96	1051.92	508.96	130.52	24.87	4.70	2.14	1.12	0.62	0.20
OC	1145.96	1051.92	508.96	130.52	24.87	4.70	2.14	1.12	0.62	0.20
OD	1145.96	1051.92	508.96	130.52	24.87	4.70	2.14	1.12	0.62	0.20

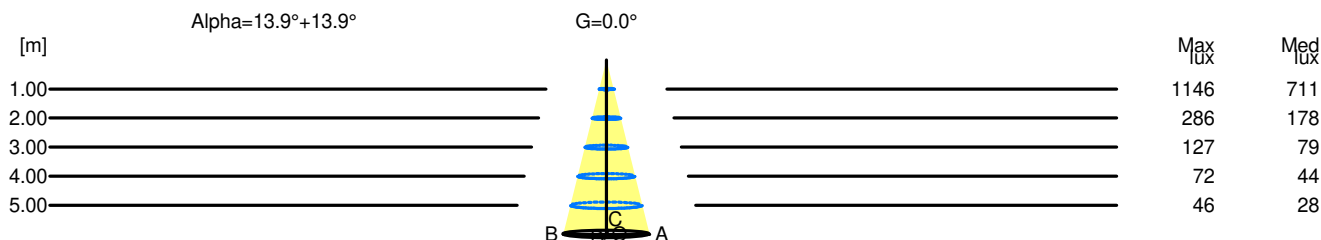

H[m]	D[m]	Max lux	Med lux	Alpha=13.9°+13.9°	G=0.0
1.00	0.49	1146	711		
2.00	0.99	286	178		
3.00	1.48	127	79		
4.00	1.98	72	44		
5.00	2.47	46	28		