

Luminaire

Code AX92004
Name HELGOLAND 90 FIX IP44 2700K WF NRO

Measurement

Code FTS2600071.
Name HELGOLAND 90 FIX IP44 2700K WF NRO

Luminaire Flux	800 lm	Luminaire Power	6.0 W	Efficacy	133.333 lm/W	Efficiency	100.00%
Source Flux	800 lm	Maximum value	2351.60 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	12 mm		
Round Luminous Area		Diam.	64 mm	Height	0 mm		
Horizontal Luminous Area		0.003217 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000778 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		800 lm	
LED Flux=1019lm LED Power=6W Eff=78% EfcLed=170lm/W EfcLum=133lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Diam=90mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

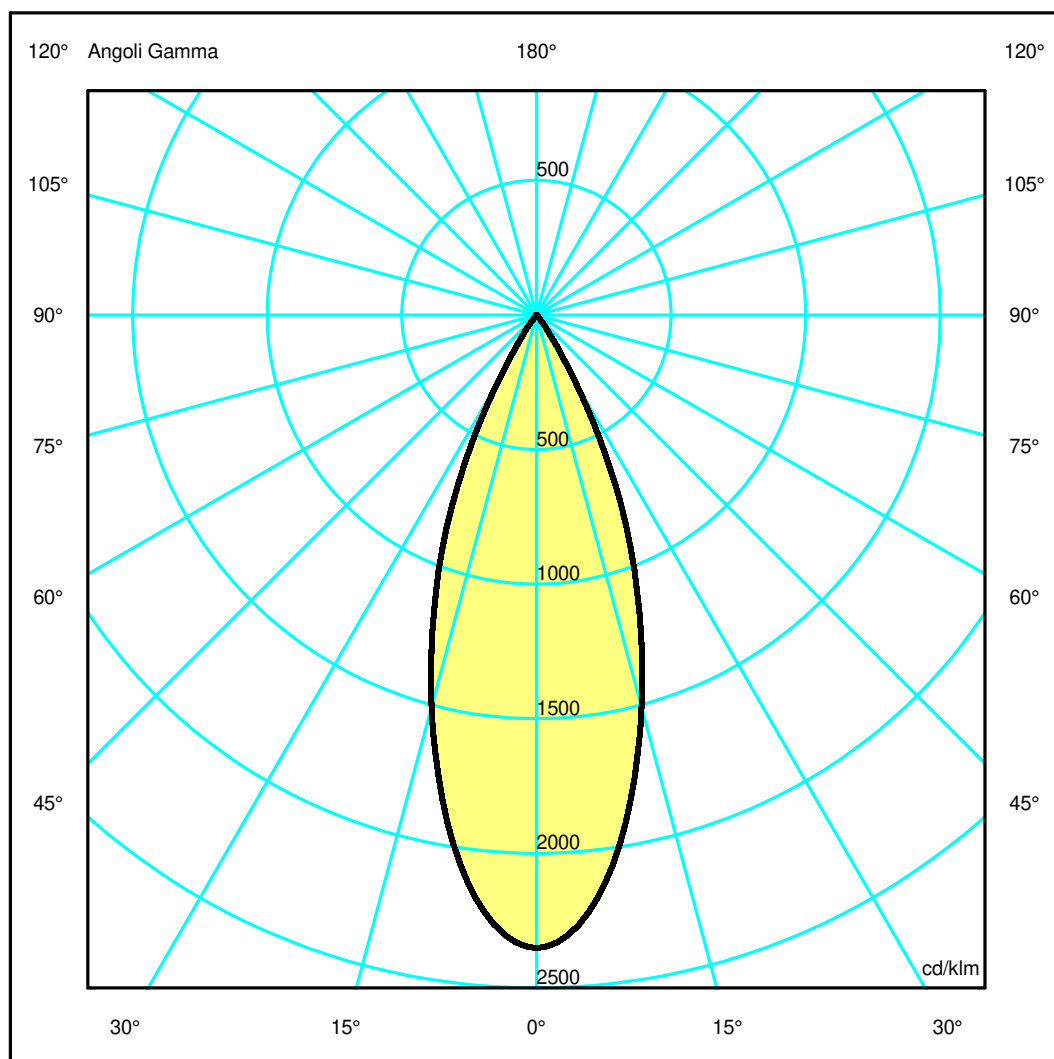

Luminaire

Code AX92004
Name HELGOLAND 90 FIX IP44 2700K WF NRO

Measurem.


Code FTS2600071.
Name HELGOLAND 90 FIX IP44 2700K WF NRO

Luminaire Flux	800 lm	Luminaire Power	6.0 W	Efficacy	133.333 lm/W	Efficiency	100.00%
Source Flux	800 lm	Maximum value	2351.60 cd/klm	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Round Luminaire		Diam.	90 mm	Height	12 mm		
Round Luminous Area		Diam.	64 mm	Height	0 mm		
Horizontal Luminous Area		0.003217 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000778 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-12-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		800 lm	
LED Flux=1019lm LED Power=6W Eff=78% EfcLed=170lm/W EfcLum=133lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	99	100	100	100			
F UTE	--				D DIN 5040	A60	
					B NBN	BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.34	0.69	1.03	1.38	1.72	OC	0.34	0.69	1.03	1.38	1.72
OB	0.34	0.69	1.03	1.38	1.72	OD	0.34	0.69	1.03	1.38	1.72

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1881.28	1781.11	1205.05	550.41	62.86	6.66	3.25	1.72	0.67	0.21
OB	1881.28	1781.11	1205.05	550.41	62.86	6.66	3.25	1.72	0.67	0.21
OC	1881.28	1781.11	1205.05	550.41	62.86	6.66	3.25	1.72	0.67	0.21
OD	1881.28	1781.11	1205.05	550.41	62.86	6.66	3.25	1.72	0.67	0.21

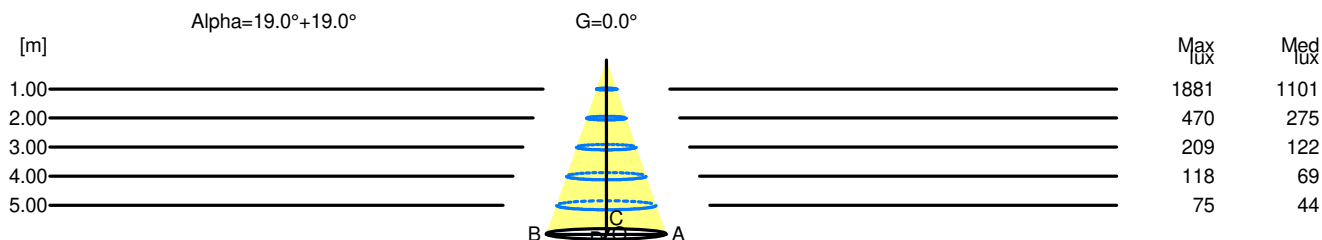

H[m]	D[m]	Max lux	Med lux	Alpha=19.0°+19.0°	G=0.0
1.00	0.69	1881	1101		
2.00	1.38	470	275		
3.00	2.06	209	122		
4.00	2.75	118	69		
5.00	3.44	75	44		