

BIM Families

Helgoland

Carlotta de Bevilacqua

Artemide®

INFORMATION

The type objects indicated by the specific term "Family" were created in BIM ambient through the use of Autodesk © Revit parametric BIM design software. The parameterization of dimensional criteria is based on the specific object and component type, whether numerical dimensional data, textual data, or unique UNICODE codes.

Families are based on the IFC shared import methodology and set to talk to modeling and analysis tools that support such file encoding.

The BIM objects provided are designed to support the operator in managing the architectural and lighting project for both the technical part and the computation of the number of items and accessories. Each BIM object (Family) presents a version parameter - v. xx - this figure marks the progressive upgrade to the latest version in relation to adaptation to native Revit© software and for any general alignments to the full catalog.

The families are based on a template of information prepared for Artemide S.p.A. in English, with CIBSE reference nomenclature (where possible).

This manual is intended to guide user to the proper use of the Family in the Autodesk© Revit environment, any attempt to modify the file in any form other than what is indicated by this document will invalidate the goodness of the 'BIM object and affect its proper functioning.

DISCLAIMER

Revit files of Artemide products are the property of Artemide S.p.A., all rights reserved.

Artemide S.p.A. reserves the right to make changes without notice. The material on the site may contain inaccuracies or typos. Artemide cannot be held responsible for any inaccuracies and errors nor for any loss or damage caused or resulting from the use made by users on the information obtained from the this site or through it. It is the user's responsibility to evaluate information and content obtainable through the site, the or and data sheets.

Copyright© 2025 by Artemide S.p.A.

All rights are reserved. Any use, total or partial, of the contents included in this document, including the dissemination or distribution of the contents themselves and through any technological and/or paper platform, is prohibited without prior written authorization from Artemide S.p.A.

1

Guidelines BIM

1.1

Revisions and dates

Rev.	Description	Date	Designed by	Approved by
r01	First Emission	dd/mm/yy	Fabio Dante - OFFICINABIM	Artemide S.p.A.

1.2

Software and versions

Tipologia	Software	Formato
Famiglia BIM	Autodesk Revit 2022	.rfa
Catalogo Digitale	Autodesk Revit 2022	.rvt
Catalogo dei tipi	Notepad ++	.txt
Manualistica	Adobe InDesign 2023	.pdf
Fogli di calcolo; Tabelle	Microsoft Excel	.xlsx; .csv
Sorgente luminosa	Dialux	.ies
Fotometria	Dialux	.ldt

1.3

Structure of folders

ARTEMIDE-Series-Product	Revit family .rfa	
	Handbook .pdf	
	Digital Catalogue .rvt	
	Colorfun .adsklib	
	Type Folder	Revit family .rfa
		Type Catalogue .txt
	LDT Folder	ARTEMIDE-Series-LDT .rfa
		Photometric files .ies

Geometries and data type

Autodesk Revit native geometries have been used, other types of geometries that are non-native or generated via external applications and/or software will be noted in this manual.
The data entered within the material type parameters will be those strictly necessary to enable the user to make an informed choice of product: specific data will be reachable through URL links to product sheets and/or on the manufacturer’s website.

Level of development and level of detail

The families under consideration are designed for professional use by the user from preliminary design to executive design. The geometries will be defined by LOD/LOIN:

	Level of Development	
Regulations	LOG	LOI
PAS 11992	from 100 to 400	400
UNI11337	da C a E	E
UNI EN ISO 19650	from B a E	E
US	from 10 to 50	50

Visibilità a seconda del livello di dettaglio (di Revit) delle parti 3D e/o dei dettagli

Objects	2D	3D	Low	Medium	High
Photometry	X	X	V	V	V
Main body	X	V	X	V	V
Fixings	X	V	X	X	V
Electric bodies	V	V	X	X	V
Footprint/Clearance	X	V	V	V	V
Wire-Frame Footprint	V	V	V	X	X
Fixings and accessories	X	V	X	X	V
...	tbd	tbd	tbd	tbd	tbd

1.6

Family structure

The Main Family is surface-based; nested families can be generic patterns, metric profiles, and luminaires. Within families, the maximum number of nested will be equal to two, otherwise it will be reported in this document.

1.7

File weight

Indicatively, the weight of the files is between 600 kb and 2,800 kb. Complex geometries or the use of multiple combinations of options can lead to increased file weight. The family is in fact a mini-project and contains within it the parts of the project database itself that are necessary for the definition of geometries, parameters, relationships and values: upon loading into the project this definition no longer necessary, as is the structure of the project, and therefore families even greater than 2MB often do not “impact” the size of the project file itself that much

1.8

Naming convention

The file name becomes, in the Autodesk®Revit® project, the family name that the user/designer sees and will be used to point to the object, search for it, select it, change it, count it, etc. Family type is a talking code to make the technical and physical characteristics of the type understood with alpha numeric characters. The various parts of the file/family name are separated by “-”; “_”; “[]”; preceded by the manufacturer’s name “Artemide” to be recognized in tables and lists listed by Family/Type

FAMILY NAME				
Manufacturer “_”	Series “-” <i>Phyton</i>	Product “_” <i>Phyton</i>	Model “-.” <i>Phyton</i>	More <i>Camel/Case</i>
ARTEMIDE	NameSeries	Product	Model	description
...	tbd	tbd	tbd	tbd

ARTEMIDE-Series-Name-Product_Model-Description

Combinations between dimensions and/or quality data and/or options and/or materials, generate different configurations within the same family. The user after choosing the family, selects the family from one or more types that define the specific characteristics of the object; size, photometry or the powers.

TYPE NAME					
Series “ _ ”	Model “ _ ” <i>Phyton</i>	Name “-” <i>Phyton</i>	“dim. ” _ ” <i>mm</i>	lumen “ _ ” <i>lm</i>	color “J” <i>K</i>
Series	Model	Type	1000	1000	3000
...	tbd	tbd	tbd	tbd	tbd

Series_Model_Name-1000mm_1000lm_3000K

1.9

Categories

UNIQUE FAMILY SETTINGS			
Parameter	Value	Description/application	Notes
Part Type	Normal	Generic	-
Round Connector	Use Diameter		
Omniclass	23.80.70.11.14	General Luminaries Directional	Allocated specifically by type in the Parameter Shared of the family
Host	Face	Surface based	It might be different depending on the type of product
Cut with void	No		
Light Source	Yes	Active Light Source	
Shared	No	Shared by computation	
Room Calculation PT	Yes	Shares calculation with locals	Insertion point 1000 mm from the surface
Always vertical	No	Free XYZ orientation	It is based on surface

Subcategories

Main Family elements and nested Families are assigned to Revit Subcategories to ensure component traceability within the Visibility/Graphics Panel, enabling better On/Off management of individual Artemide products.

SUBCATEGORIES		
Manufacturer “ ” _	Name <i>Phyton</i>	Description
Artemide	Lighting	Lamp object components
Artemide	Electric	Electrical components (driver/supply etc.)
Artemide	LineCoarse	Wire frame footprint (visible at low detail and track placing)
Artemide	Axis	Reference (visible at low detail)
	Clearance	Mass of maximum footprint
	Light Source	Default Revit (light source)

Materials and Family Types

The main Family at its core consists of text parameters that indicated the name of Artemide’s Library, this is to avoid inconvenience, change of materials by the User not approved by Artemide.

Family types

Families composed of Family Types pre-filled in all their parts and accompanied by an ascii “.txt” file containing all material and size combinations. Upon loading into the project the user, via the appropriate dialog box, can choose which types (combinations) to load.

Material Library

The Revit “.adsklib” library file is provided to accompany the BIM Family in order to transfer Materials and Textures to the user who, in case of file breakage (delete Materials), will be able to appropriately reconnect materials to the Family. Material grouping is defined with appropriate subfolders for each of the Categories and Material Types according to the Artemide catalog.

The graphic part of the material is predefined and is defined with a color similar to the actual Texture color, but matted and “pastel” so NOT macro, for proper color matching in print. The information part will be enhanced in **Identity/Mark** so as to be recognized by Revit’s material abacuses.

MATERIAL			
Manufacturer “ ” _	Class “ ” _	Material code “ ” _	Description <i>Phyton</i>
Artemide	CLS	1000	BriefDescription
Artemide	tbd	tbd	tbd

1.12

Photometry

The Default Revit light source is varied depending on the type of emission and distribution according to the product type characteristics: Light Source Definition

In special cases where directional, direct/indirect light is present, the light source is imported as a nested Family with the name of “Artemide_LDT_(direct/indirect)”. This procedure to overcome the limitation of the Revit program. To ensure the correct LOI information level, the summation of photometric and electrical values are given as USERDEFINED in the typological parameters of the main Family. < 3 >

1.13

Connectors

The Main Family generated the electrical connector powering the luminaire as:

Electrical Connector

Setting of connectors in families according to the type of system to be connected that should NOT be removed, added, renamed, edited, changed.

CONNECTOR ELEMENT			
Parameter	Value	Description/application	Notes
System Type	Powered - Balanced	Connector type	-
Number of Poles	1	Number of poles	-
Power Factor State	Lagging	-	-
Load Classification	Lighting	Type of load	-
Voltage	Power Supply	Voltage	-
Apparent Load	Power Max	Machine consumption	-
Power Factor	1	Consumption coefficient	0 to 1
Room Calculation PT	Yes	Shares calculation with locals	Insertion point 1000 mm from the surface
Always vertical	No	Free XYZ orientation	It is based on surface

1.14

Parameters

Parameters are entered within the Main Family:

TIPO DI PARAMETRO	USERDEFINED
Built-In	Ingombro massimo
Family Parameters	IFC
Shared Parameters	Artemide
	BuildingSmart Pset



The Family parameterization is associated with parameters composed of mathematical formulas sorted in the “Other” section that condition the proper functioning of the family and/or NOT indicated as USERDEFINED > MUST NOT BE CHANGED BY THE USER.

Nome Parametro	Natura	Disciplina	Tipo	Gruppo	T/I	Descrizione
Construction						
D_CableHeight	FamilyParameter	Common	Length	Construction	Instance	
Materials and Finishes						
M_Diffuser	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_ElectricCable	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_ElectricFixing	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_ElectricHousing	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_ElectricWire	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_Fixing	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_Gasket	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_Housing	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_Holder	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_Reflector	FamilyParameter	Common	Text	Materials and Finishes	Type	
M_Trim	FamilyParameter	Common	Text	Materials and Finishes	Type	
Electrical						
Current	SharedParameter	Electrical	Current	Electrical	Type	
Frequency	SharedParameter	Electrical	Frequency	Electrical	Type	
Number of Poles	SharedParameter	Electrical	Number of Poles	Electrical	Type	
Rated Wattage	SharedParameter	Electrical	Power	Electrical	Type	
Source Luminous Flux	SharedParameter	Electrical	Luminous Flux	Electrical	Type	
Supply Voltage	SharedParameter	Electrical	Electrical Potential	Electrical	Type	
Supply Voltage Max	SharedParameter	Electrical	Electrical Potential	Electrical	Type	
Supply Voltage Min	SharedParameter	Electrical	Electrical Potential	Electrical	Type	
Wattage Comments	Built-In	Electrical	Text	Electrical	Type	
Control Gear Location	SharedParameter	Electrical	Text	Electrical	Type	
Control Gear Required	SharedParameter	Electrical	Yes/No	Electrical	Type	
Control Gear Type	SharedParameter	Electrical	Text	Electrical	Type	
Integral Fuse or Circuit Protection	SharedParameter	Electrical	Yes/No	Electrical	Type	
Protection Class	SharedParameter	Electrical	Text	Electrical	Type	
Suitable Dimmer Type	SharedParameter	Electrical	Text	Electrical	Type	
Suitable for Dimming	SharedParameter	Electrical	Yes/No	Electrical	Type	
Lamp	Built-In	Electrical	Text	Electrical	Type	
Service Life	SharedParameter	Electrical	Text	Electrical	Type	
Electrical - Lighting						
Calculate Coefficient of Utilization	Built-In	Electrical	Yes/No	Electrical - Lighting	Type	
Coefficient of Utilization	Built-In	Electrical	Number	Electrical - Lighting	Type	
Electrical - Loads						
Power Factor	SharedParameter	Electrical	Number	Electrical - Loads	Type	
Apparent Load	SharedParameter	Electrical	Apparent Power	Electrical - Loads	Type	
Load Classification	Built-In	Electrical	Load Classification	Electrical - Loads	Type	
Total Power	SharedParameter	Electrical	Power	Electrical - Loads	Type	
Dimensions						
NominalLength	SharedParameter	Common	Length	Dimensions	Type	
NominalHeight	SharedParameter	Common	Length	Dimensions	Type	
NominalWidth	SharedParameter	Common	Length	Dimensions	Type	

IFC Parameters					
IFC Classification	SharedParameter	Common	Text	IFC Parameters	Type
IfcExportAs	SharedParameter	Common	Text	IFC Parameters	Type
IfcExportType	SharedParameter	Common	Text	IFC Parameters	Type
COBie Type Category	SharedParameter	Common	Text	IFC Parameters	Type
Uniclass Pr Code	SharedParameter	Common	Text	IFC Parameters	Type
Uniclass Pr Name	SharedParameter	Common	Text	IFC Parameters	Type
Unifomat Code	SharedParameter	Common	Text	IFC Parameters	Type
Unifomat Description	SharedParameter	Common	Text	IFC Parameters	Type
Masterformat Code	SharedParameter	Common	Text	IFC Parameters	Type
Masterformat Description	SharedParameter	Common	Text	IFC Parameters	Type
OmniClass Code	SharedParameter	Common	Text	IFC Parameters	Type
OmniClass Description	SharedParameter	Common	Text	IFC Parameters	Type

Photometrics					
LDT <Type>	FamilyParameter	Common	URL	Photometrics	Type
Colour Temperature	SharedParameter	Electrical	Color Temperature	Photometrics	Type
Luminous Efficacy	FamilyParameter	Electrical	Efficacy	Photometrics	Type
Delivered Luminous Flux	FamilyParameter	Electrical	Luminous Flux	Photometrics	Instance
Beam Angle	FamilyParameter	Common	Angle	Photometrics	Type
CRI	SharedParameter	Common	Text	Photometrics	Type
Lamp Count	FamilyParameter	Common	Integer	Photometrics	Type
Light Source Type	FamilyParameter	Common	Text	Photometrics	Type
Efficacy	FamilyParameter	Common	Number	Photometrics	Type
Luminous Intensity	FamilyParameter	Common	Number	Photometrics	Type
Illuminance	FamilyParameter	Common	Number	Photometrics	Type

General					
ART_Manufacturer	FamilyParameter	Common	Text	General	Type
ART_Designer name	FamilyParameter	Common	Text	General	Type
ART_Product year	FamilyParameter	Common	Text	General	Type
ART_SeriesName	FamilyParameter	Common	Text	General	Type
ART_Model name	FamilyParameter	Common	Text	General	Type
ART_Features	FamilyParameter	Common	Text	General	Type
ART_Product model number	FamilyParameter	Common	Text	General	Type
ART_Manufacturer Comment	FamilyParameter	Common	Text	General	Type
ART_BIM Designer name	FamilyParameter	Common	Text	General	Type
ART_BIM Product version	FamilyParameter	Common	Text	General	Type
ART_Date of publishing	FamilyParameter	Common	Text	General	Type
ART_Manufacturer contact mail	FamilyParameter	Common	Text	General	Type
ART_Manufacturer contact number	FamilyParameter	Common	Text	General	Type
ART_Manufacturer country	FamilyParameter	Common	Text	General	Type
ART_Manufacturer website	FamilyParameter	Common	URL	General	Type
ART_Warranty	FamilyParameter	Common	URL	General	Type
ART_Disclaimer	FamilyParameter	Common	Text	General	Type
ART_Product sheet URL	FamilyParameter	Common	URL	General	Type
ART_Product page URL	FamilyParameter	Common	URL	General	Type
ART_Installation note URL	FamilyParameter	Common	URL	General	Type
ART_IES page URL	FamilyParameter	Common	URL	General	Type
ART_LDT page URL	FamilyParameter	Common	URL	General	Type

Data					
Approval Mark	SharedParameter	Common	Text	Data	Type
Assembly Place	SharedParameter	Common	Text	Data	Type
Delivery Weigth	SharedParameter	Common	Mass	Data	Type
Delivery Volume	SharedParameter	Common	Volume	Data	Type
Reference	SharedParameter	Common	Volume	Data	Type
Status	SharedParameter	Common	Text	Data	Type
ContributedLuminousFlux	SharedParameter	Common	Luminous Flux	Data	Type
LightEmitterNominalPower	SharedParameter	Common	Apparent Power	Data	Type
LampMaintenanceFactor	SharedParameter	Common	Number	Data	Type
LampBallastType	SharedParameter	Common	Text	Data	Type
LampCompensationType	SharedParameter	Common	Text	Data	Type
ColorAppearance	SharedParameter	Common	Color Temperature	Data	Type
Spectrum	SharedParameter	Common	Number	Data	Type
ColorRenderingIndex	SharedParameter	Common	Text	Data	Type
GrossWeight	SharedParameter	Common	Mass	Data	Type

Visibility					
V_Driver	FamilyParameter	Common	Yes/No	Visibility	Instance
V_ErrorTag	FamilyParameter	Common	Yes/No	Visibility	Type
V_TrackPlacing	FamilyParameter	Common	Yes/No	Visibility	Type
V_Tag	FamilyParameter	Common	Yes/No	Visibility	Type
V_Link	FamilyParameter	Common	Yes/No	Visibility	Type
V_Clearance	FamilyParameter	Common	Yes/No	Visibility	Type

2

2.1

Labels linked to product information. Is a script with 3D text to be visible in plan and three-dimensional view. Visible by activating the check mark to the "V Tag" type parameter.

Alphabet of Light StandAlone
Alphabet of Light StandAlone_Suspended_Linear_1200mm_3000K

⚡ Cert: EPD Italy 1204000APP Push&APP

ART SeriesName

ART Model name

C Powered

ART Cert.

ART_Product model name

Suitable Dimmer Type

Error label for incorrect compilation of USERDEFINED parameters according to the limitations of type variables indicated in product data sheet. Visible by activating the check mark on the parameter of type "V ErrorTag".

Attention excursion 500/1500 mm. Value positioned at Min = 500 mm
Ok


> USERDEFINED Parameters

Error message > Please check the parameters
and Artemide Catalogue

2.2

References

To facilitate the display of the side and vertex within the element, the type parameter “V_TrackPlacing” can be activated. Visualization in plan/prospect/3D of the corresponding identification elements



Coarse contour line
visible in 2D and 3D
views

Axis of reference for positioning

Ground circle by 0,0,0
family insertion point

3 Type catalogue

Revit families from **dedicated folder < 1.3 >** are associated with the .txt text file containing filters useful for importing only the filtered and selected types.


This procedure is recommended and allows importing only the desired types from the main family.

This operation can be done several times, depending on design needs.


The tabular text file does NOT contain all the parameters of the family, but only some that are useful to the user for filtering and insertion and sorted according to logic. This is to make it easier and more understandable to use.

Insertion procedure:



1-In the project file, insert the specific Family:

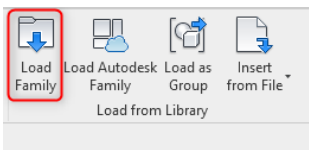

2-Filter by columns and select by rows:

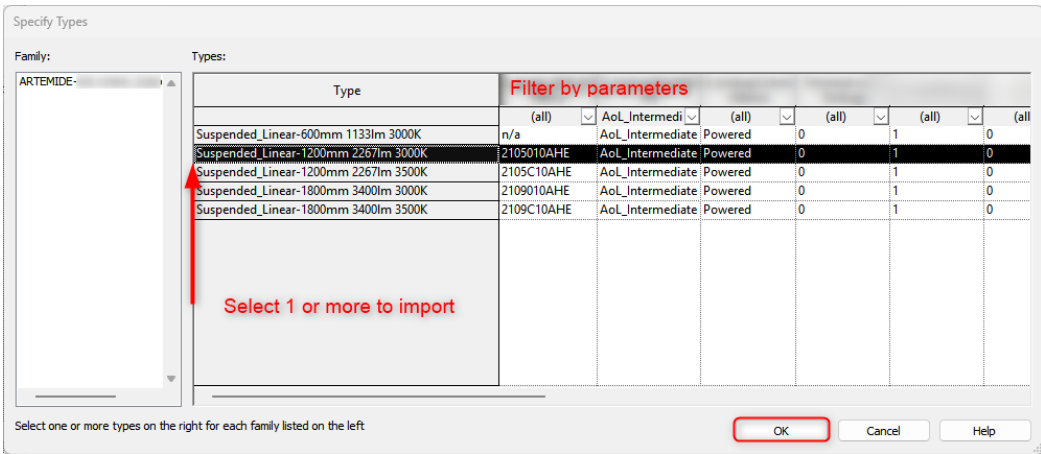

Remember to select with the mouse the rows to be imported, it must be black as an image



CAUTION the Autodesk Revit software with the import procedure from catalog types, does NOT retain the memory of the listed files, especially the LDT photometry. Software limitation.

Manually reconnect the light source from the LDT parameter. (This error does not occur with import of the .rfa file within the .rvt project file).

3

Nested LDT

The Family has nested “Default” photometry, with standard parameters. This approach is derived from the need obtain lightweight RFA file for use for design purposes, graphing while taking advantage of maximum working fluidity in Autodesk Revit.


Lighting / Render

Artemide’s “Original” LDT Family file is provided separately and can be inserted according to the purpose of use using the following procedure:

1-In the project file, insert the dedicated LDT file for the specific Family “ARTEMIDE_[Collection_Name_]_LDT” :




from your folder //Artemide_LDT

 Artemide_Helgoland_LDT.rfa

from the direct link present in Family parameters: Generali / ART_Product page URL


2-Replacement of the nested/shared Family “Default” file:

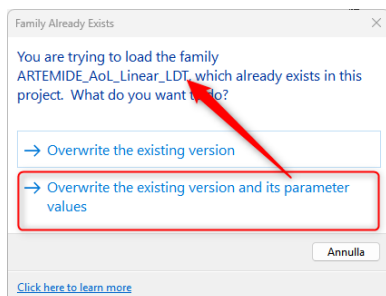

LDT <Shared>

Nested LDT families have been set as <Shared> in Revit, the RFA file is inserted into the project updating all LDTs associated with the specific families.

The shared family aggravates the project file by its own weight in single instance, then in parallel (not inserted within each main Family, vertically) this allows multiple families with the same type characteristics to share the same nested LDT and reduce the heaviness of the file.




< view list of families from Revit's Project Brower

Restore “Default”

To restore the initial conditions, reload the LDT file located in the //LDT_Default folder.

ARTEMIDE Helgoland Trim

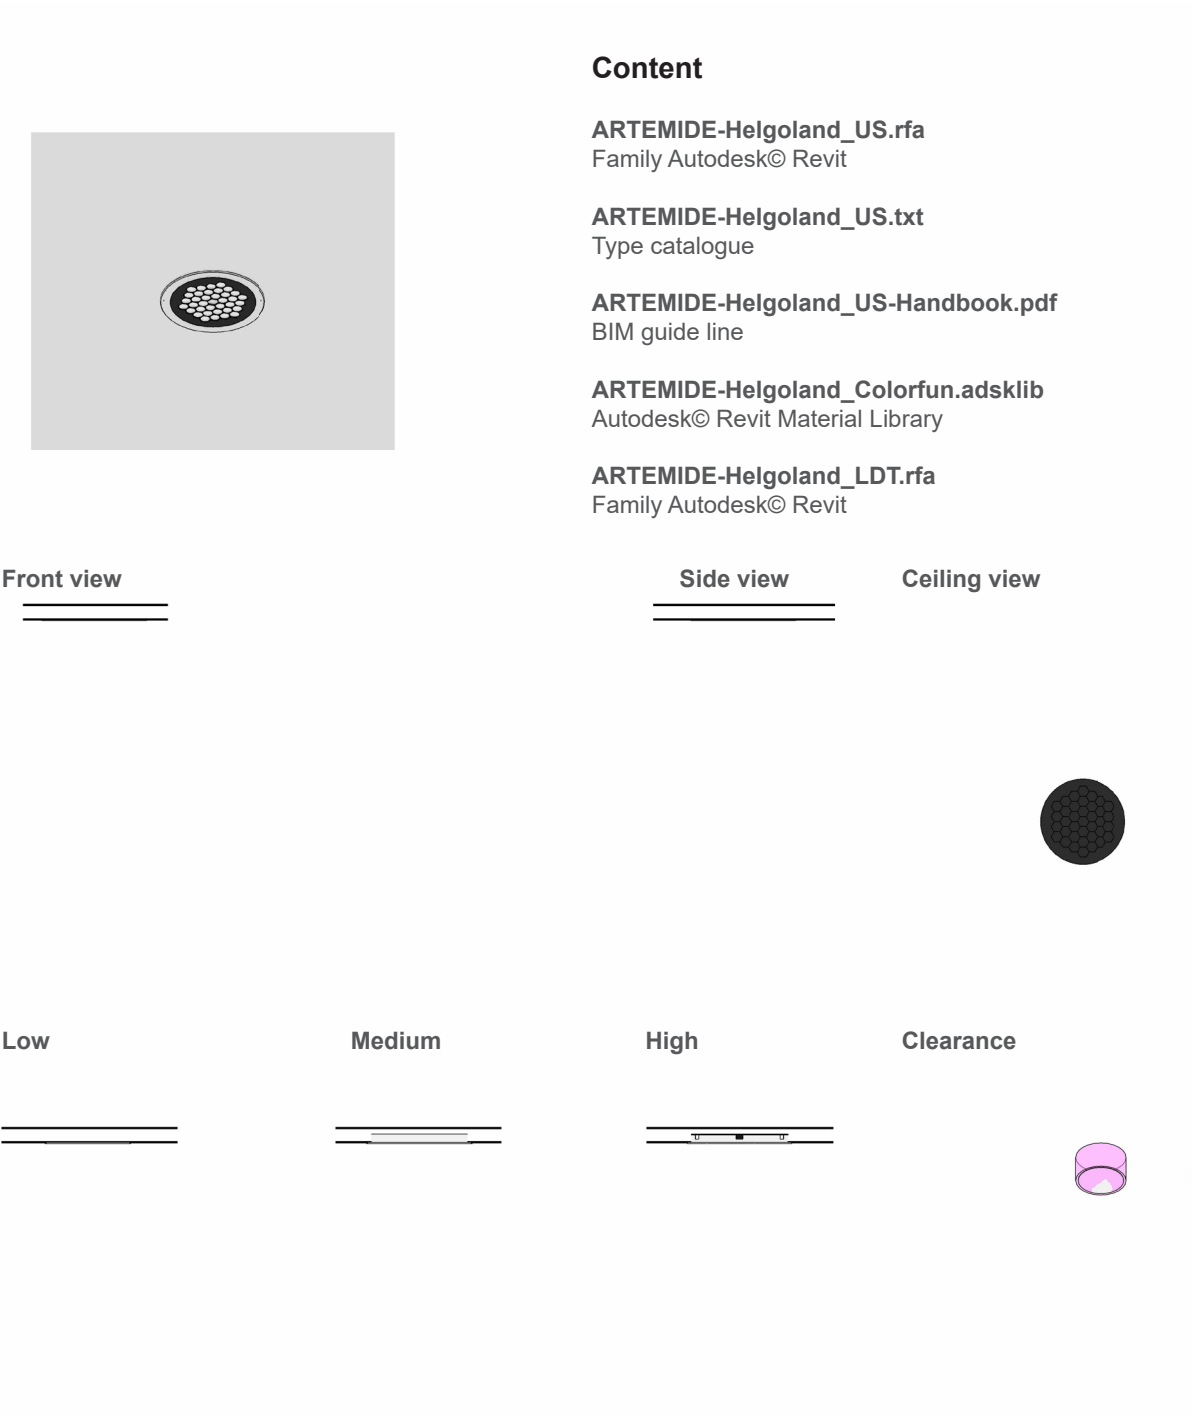

Content

ARTEMIDE-Helgoland_US.rfa

Family Autodesk© Revit

ARTEMIDE-Helgoland_US.txt

Type catalogue

ARTEMIDE-Helgoland_US-Handbook.pdf

BIM guide line

ARTEMIDE-Helgoland_Colorfun.adsklib


Autodesk© Revit Material Library

ARTEMIDE-Helgoland_LDT.rfa

Family Autodesk© Revit

ARTEMIDE Helgoland

Trimless

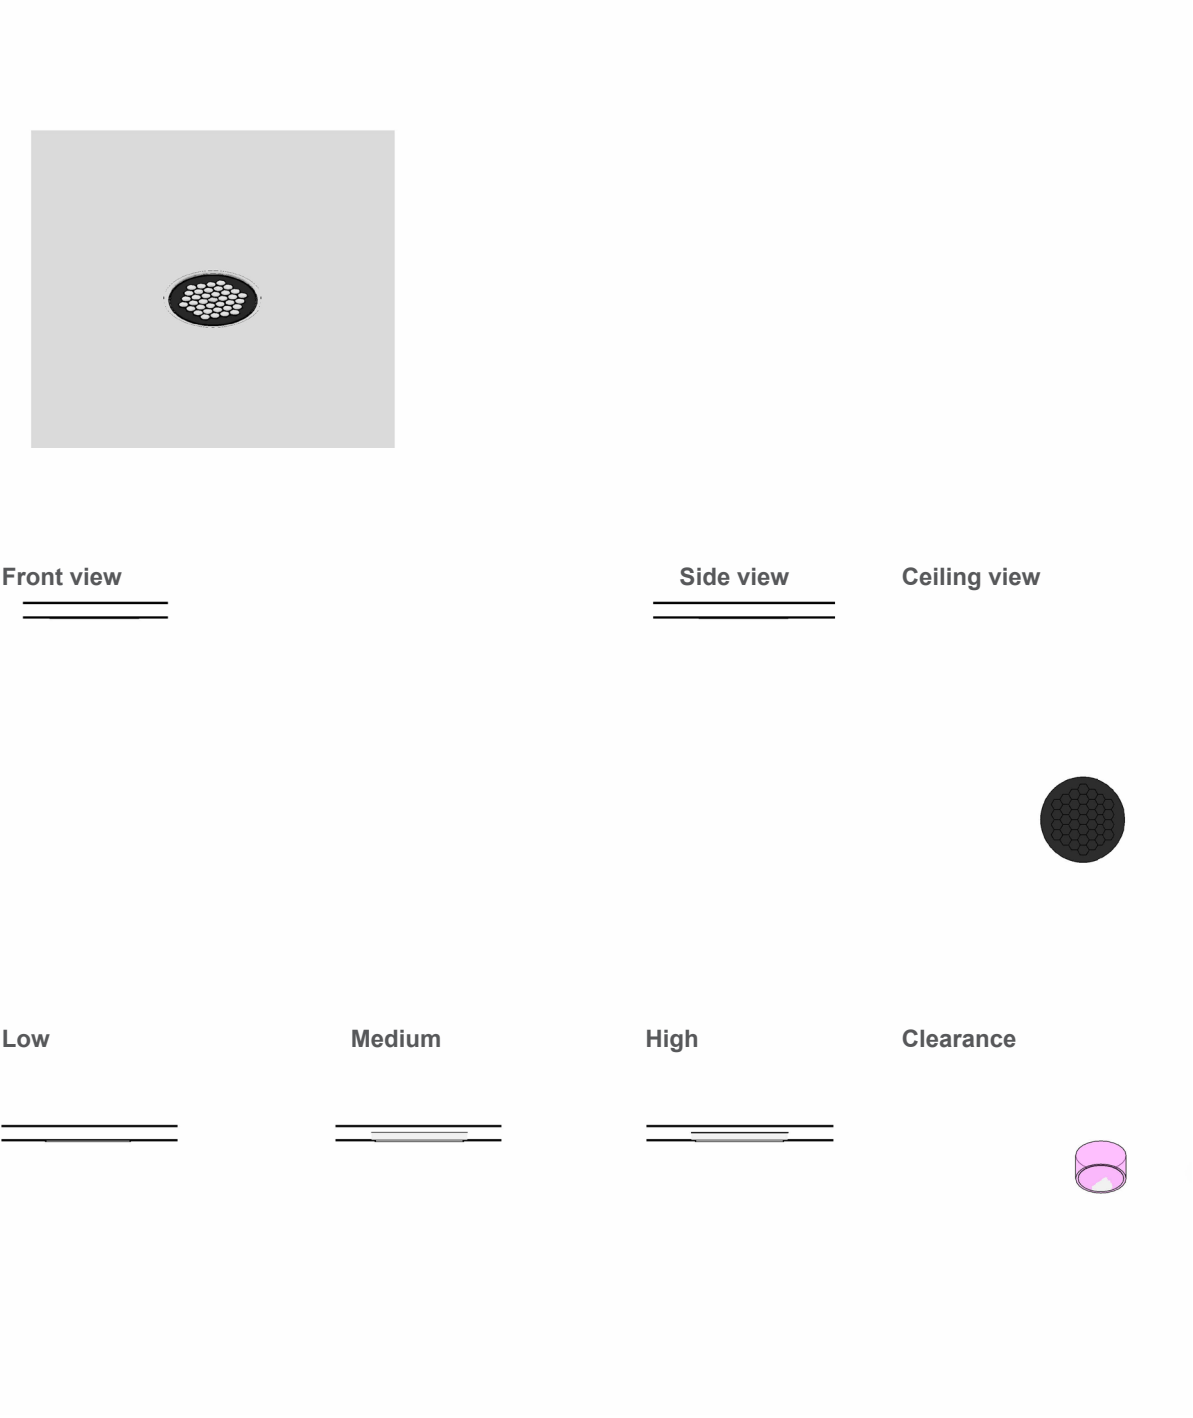


ARTEMIDE Helgoland SMD Recessed



Front view




Side view




Ceiling view




Low



Medium



High




Clearance




ARTEMIDE Helgoland SMD Built-In



Front view




Side view




Ceiling view



Low



Medium



High



Clearance



ARTEMIDE-Helgoland

FAMILY TEMPLATE

Template

Host	Surface based - Face
Category	Lighting Devices
Cut with Void When Loaded	No
Mantain Annotation Orientation	No
Shared	No
Room Calculation Point	Yes
Light Source	Nested Family LDT < 3 >

Type list

Family Name	Type Name
ARTEMIDE-Helgoland	SMD Built-in Driver_124Øx53h 28° 2700K
	SMD Built-in Driver_124Øx53h 28° 3000K
	SMD Built-in Driver_124Øx53h 28° 3500K
	SMD Built-in Driver_124Øx53h 28° 4000K
	SMD Built-in Driver_124Øx53h 38° 2700K
	SMD Built-in Driver_124Øx53h 38° 3000K
	SMD Built-in Driver_124Øx53h 38° 3500K
	SMD Built-in Driver_124Øx53h 38° 4000K
	SMD Built-in Driver_124Øx53h 60° 2700K
	SMD Built-in Driver_124Øx53h 60° 3000K
	SMD Built-in Driver_124Øx53h 60° 3500K
	SMD Built-in Driver_124Øx53h 60° 4000K
	SMD Built-in Driver_164Øx53h 28° 2700K
	SMD Built-in Driver_164Øx53h 28° 3000K
	SMD Built-in Driver_164Øx53h 28° 3500K
	SMD Built-in Driver_164Øx53h 28° 4000K
	SMD Built-in Driver_164Øx53h 38° 2700K

	SMD Built-in Driver_164Øx53h 38° 3000K
	SMD Built-in Driver_164Øx53h 38° 3500K
	SMD Built-in Driver_164Øx53h 38° 4000K
	SMD Built-in Driver_164Øx53h 60° 2700K
	SMD Built-in Driver_164Øx53h 60° 3000K
	SMD Built-in Driver_164Øx53h 60° 3500K
	SMD Built-in Driver_164Øx53h 60° 4000K
	SMD Remote Driver_124Øx25h 28° 2700K
	SMD Remote Driver_124Øx25h 28° 3000K
	SMD Remote Driver_124Øx25h 28° 3500K
	SMD Remote Driver_124Øx25h 28° 4000K
	SMD Remote Driver_124Øx25h 38° 2700K
	SMD Remote Driver_124Øx25h 38° 3000K
	SMD Remote Driver_124Øx25h 38° 3500K
	SMD Remote Driver_124Øx25h 38° 4000K
	SMD Remote Driver_124Øx25h 60° 2700K
	SMD Remote Driver_124Øx25h 60° 3000K
	SMD Remote Driver_124Øx25h 60° 3500K
	SMD Remote Driver_124Øx25h 60° 4000K
	SMD Remote Driver_164Øx25h 28° 2700K
	SMD Remote Driver_164Øx25h 28° 3000K
	SMD Remote Driver_164Øx25h 28° 3500K
	SMD Remote Driver_164Øx25h 28° 4000K
	SMD Remote Driver_164Øx25h 38° 2700K
	SMD Remote Driver_164Øx25h 38° 3000K
	SMD Remote Driver_164Øx25h 38° 3500K
	SMD Remote Driver_164Øx25h 38° 4000K
	SMD Remote Driver_164Øx25h 60° 2700K
	SMD Remote Driver_164Øx25h 60° 3000K
	SMD Remote Driver_164Øx25h 60° 3500K
	SMD Remote Driver_164Øx25h 60° 4000K
	SMD Remote Driver_64Øx25h 28° 2700K
	SMD Remote Driver_64Øx25h 28° 3000K
	SMD Remote Driver_64Øx25h 28° 3500K

	SMD Remote Driver_64Øx25h 28° 4000K
	SMD Remote Driver_64Øx25h 38° 2700K
	SMD Remote Driver_64Øx25h 38° 3000K
	SMD Remote Driver_64Øx25h 38° 3500K
	SMD Remote Driver_64Øx25h 38° 4000K
	SMD Remote Driver_64Øx25h 60° 2700K
	SMD Remote Driver_64Øx25h 60° 3000K
	SMD Remote Driver_64Øx25h 60° 3500K
	SMD Remote Driver_64Øx25h 60° 4000K
	SMD Remote Driver_94Øx25h 28° 2700K
	SMD Remote Driver_94Øx25h 28° 3000K
	SMD Remote Driver_94Øx25h 28° 3500K
	SMD Remote Driver_94Øx25h 28° 4000K
	SMD Remote Driver_94Øx25h 38° 2700K
	SMD Remote Driver_94Øx25h 38° 3000K
	SMD Remote Driver_94Øx25h 38° 3500K
	SMD Remote Driver_94Øx25h 38° 4000K
	SMD Remote Driver_94Øx25h 60° 2700K
	SMD Remote Driver_94Øx25h 60° 3000K
	SMD Remote Driver_94Øx25h 60° 3500K
	SMD Remote Driver_94Øx25h 60° 4000K
	Trim_120Ø 28° 2700K
	Trim_120Ø 28° 3000K
	Trim_120Ø 28° 3500K
	Trim_120Ø 28° 4000K
	Trim_120Ø 38° 2700K
	Trim_120Ø 38° 3000K
	Trim_120Ø 38° 3500K
	Trim_120Ø 38° 4000K
	Trim_120Ø 60° 2700K
	Trim_120Ø 60° 3000K
	Trim_120Ø 60° 3500K
	Trim_120Ø 60° 4000K
	Trim_160Ø 28° 2700K

	Trim_160Ø 28° 3000K
	Trim_160Ø 28° 3500K
	Trim_160Ø 28° 4000K
	Trim_160Ø 38° 2700K
	Trim_160Ø 38° 3000K
	Trim_160Ø 38° 3500K
	Trim_160Ø 38° 4000K
	Trim_160Ø 60° 2700K
	Trim_160Ø 60° 3000K
	Trim_160Ø 60° 3500K
	Trim_160Ø 60° 4000K
	Trim_60Ø 28° 2700K
	Trim_60Ø 28° 3000K
	Trim_60Ø 28° 3500K
	Trim_60Ø 28° 4000K
	Trim_60Ø 38° 2700K
	Trim_60Ø 38° 3000K
	Trim_60Ø 38° 3500K
	Trim_60Ø 38° 4000K
	Trim_60Ø 60° 2700K
	Trim_60Ø 60° 3000K
	Trim_60Ø 60° 3500K
	Trim_60Ø 60° 4000K
	Trim_90Ø 28° 2700K
	Trim_90Ø 28° 3000K
	Trim_90Ø 28° 3500K
	Trim_90Ø 28° 4000K
	Trim_90Ø 38° 2700K
	Trim_90Ø 38° 3000K
	Trim_90Ø 38° 3500K
	Trim_90Ø 38° 4000K
	Trim_90Ø 60° 2700K
	Trim_90Ø 60° 3000K
	Trim_90Ø 60° 3500K

	Trim_90Ø 60° 4000K
	Trimless_120Ø 28° 2700K
	Trimless_120Ø 28° 3000K
	Trimless_120Ø 28° 3500K
	Trimless_120Ø 28° 4000K
	Trimless_120Ø 38° 2700K
	Trimless_120Ø 38° 3000K
	Trimless_120Ø 38° 3500K
	Trimless_120Ø 38° 4000K
	Trimless_120Ø 60° 2700K
	Trimless_120Ø 60° 3000K
	Trimless_120Ø 60° 3500K
	Trimless_120Ø 60° 4000K
	Trimless_160Ø 28° 2700K
	Trimless_160Ø 28° 3000K
	Trimless_160Ø 28° 3500K
	Trimless_160Ø 28° 4000K
	Trimless_160Ø 38° 2700K
	Trimless_160Ø 38° 3000K
	Trimless_160Ø 38° 3500K
	Trimless_160Ø 38° 4000K
	Trimless_160Ø 60° 2700K
	Trimless_160Ø 60° 3000K
	Trimless_160Ø 60° 3500K
	Trimless_160Ø 60° 4000K
	Trimless_60Ø 28° 2700K
	Trimless_60Ø 28° 3000K
	Trimless_60Ø 28° 3500K
	Trimless_60Ø 28° 4000K
	Trimless_60Ø 38° 2700K
	Trimless_60Ø 38° 3000K
	Trimless_60Ø 38° 3500K
	Trimless_60Ø 38° 4000K
	Trimless_60Ø 60° 2700K

	Trimless_60Ø 60° 3000K
	Trimless_60Ø 60° 3500K
	Trimless_60Ø 60° 4000K
	Trimless_90Ø 28° 2700K
	Trimless_90Ø 28° 3000K
	Trimless_90Ø 28° 3500K
	Trimless_90Ø 28° 4000K
	Trimless_90Ø 38° 2700K
	Trimless_90Ø 38° 3000K
	Trimless_90Ø 38° 3500K
	Trimless_90Ø 38° 4000K
	Trimless_90Ø 60° 2700K
	Trimless_90Ø 60° 3000K
	Trimless_90Ø 60° 3500K
	Trimless_90Ø 60° 4000K

ARTEMIDE-Helgoland_Driver

FAMILY TEMPLATE

Template

Host	Generic Model
Category	Electrical Fixtures
Cut with Void When Loaded	No
Mantain Annotation Orientation	No
Shared	Yes
Room Calculation Point	Yes

Type list








Family Name	Type Name
ARTEMIDE-Helgoland_Driver	22W_Undimmable
	22W_DALI2orPUSH
	25 W_DALIor0-10orPUSH
	38W_APP&PUSH_500mA_38V
	38W_APP&PUSH_300mA_8.5V
	38W_APP&PUSH_350mA_17V
	38W_APP&PUSH_500mA_17V

ARTEMIDE-AoL-System-Linear_Suspended

USERDEFINED parameters

Material

The Helgoland object has different finishes of the external lamp body, as visible in the ARTEMIDE catalogue and are numbered by number: 0,1,2,3,4,5.
To apply the desired finish via family parameter use the material list provided.

CONSTRUCTION	
Parameter	Operation
C_Driver Type	Select the type of Driver from the list. The Driver is a Neasted Family.
C_Accessories	Select the US accessories for the lamp
M_Finishing	Set the color finishing by material list or charge ARTEMIDE-Helgoland_Colorfun.adsklib
	<div>Artemide_GLS_OpalTechnopolymer</div>
	<div>Artemide_MET_00_AnodizedAluminum</div>
	<div>Artemide_MET_01_AluminumWhite</div>
	<div>Artemide_MET_02_AluminumBlue</div>
	<div>Artemide_MET_03_AluminumCopper</div>
	<div>Artemide_MET_04_AluminumBlack</div>
	<div>Artemide_MET_05_AluminumSilver</div>

Headquarters

Artemide S.p.A.

Via Bergamo, 18
20006 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Artemide S.p.A.
si riserva la facoltà di modificare, in qualunque
momento e senza preavviso, le caratteristiche
tecniche degli elementi illustrati nel presente
catalogo.

Artemide S.p.A.
reserves the right to change, at any time and
without prior warning, the technical specifications
of any product illustrated in this catalogue.

Artemide S.p.A.
se réserve le droit de modifier, à n'importe
quel moment et sans préavis, les caractéristiques
techniques des éléments illustrés dans ce
catalogue.

Artemide S.p.A.
behält sich das Recht vor jederzeit und ohne
Ankündigung die technischen Daten der im
Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.
se reserva la facultad de modificar, en cualquier
y sin aviso previo, las características técnicas
de los elementos ilustrados en el presente
catálogo.

2025 updated version. V.2

For information regarding distributors
and points of sale, please visit our website
artemide.com or email: info@artemide.com

Artemide