

## Luminaire

Code AX94001  
Name HELGOLAND 120 FIX IP44 2700K WF BCO

## Measurement

Code FTS2600098.  
Name HELGOLAND 120 FIX IP44 2700K WF BCO

Luminaire Flux	1221 lm	Luminaire Power	8.5 W	Efficacy	143.647 lm/W	Efficiency	100.00%
Source Flux	1221 lm	Maximum value	2335.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1221 lm	
LED Flux=1458lm LED Power=8.5W Eff=84% EfcLed=171lm/W EfcLum=144lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Diam=120mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %



## Luminaire

Code AX94001  
Name HELGOLAND 120 FIX IP44 2700K WF BCO

## Measur.


Code FTS2600098.  
Name HELGOLAND 120 FIX IP44 2700K WF BCO

Luminaire Flux	1221 lm	Luminaire Power	8.5 W	Efficacy	143.647 lm/W	Efficiency	100.00%
Source Flux	1221 lm	Maximum value	2335.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1221 lm	
LED Flux=1458lm LED Power=8.5W Eff=84% EfcLed=171lm/W EfcLum=144lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.66	0.99	1.32	1.65	OC	0.33	0.66	0.99	1.32	1.65
OB	0.33	0.66	0.99	1.32	1.65	OD	0.33	0.66	0.99	1.32	1.65

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2851.58	2704.76	1773.62	714.41	98.97	39.42	29.41	20.23	10.74	2.94
OB	2851.58	2704.76	1773.62	714.41	98.97	39.42	29.41	20.23	10.74	2.94
OC	2851.58	2704.76	1773.62	714.41	98.97	39.42	29.41	20.23	10.74	2.94
OD	2851.58	2704.76	1773.62	714.41	98.97	39.42	29.41	20.23	10.74	2.94

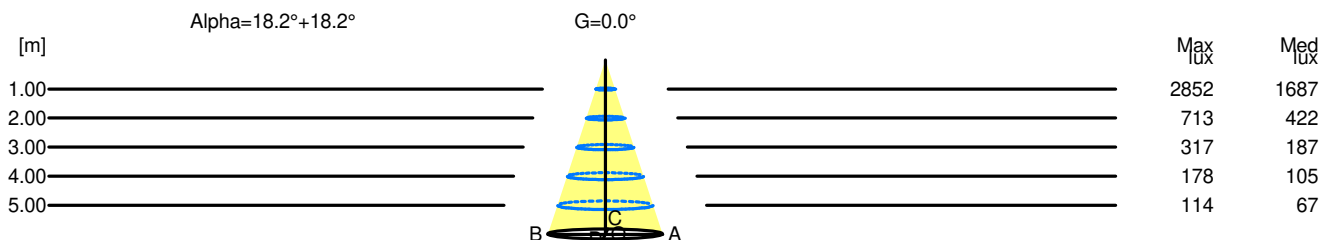

H[m]	D[m]	Max lux	Med lux	Alpha=18.2°+18.2°	G=0.0
1.00	0.66	2852	1687		
2.00	1.32	713	422		
3.00	1.98	317	187		
4.00	2.64	178	105		
5.00	3.30	114	67		