

Luminaire

Code AX12411
Name HELGOLAND 120 ADJ 3000K FL BCO/BCO

Measurement

Code FTS2600010
Name HELGOLAND 120 ADJ 3000K FL BCO/BCO

| | | | | | | | |
|--|------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1248 lm | Luminaire Power | 8.5 W | Efficacy | 146.824 lm/W | Efficiency | 100.00% |
| Source Flux | 1248 lm | Maximum value | 2961.35 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 120 mm | Height | 12 mm | | |
| Round Luminous Area | | Diam. | 89 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.006221 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.001505 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 02-04-2025 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1248 lm | |
| LED Flux=1546lm LED Power=8.5W Eff=81% EfcLed=182lm/W EfcLum=147lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h | | | | | | | |
| C.I.E. | 88 96 99 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | 1.00 A | | | B NBN | BZ 1 | | |


Diam=120mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

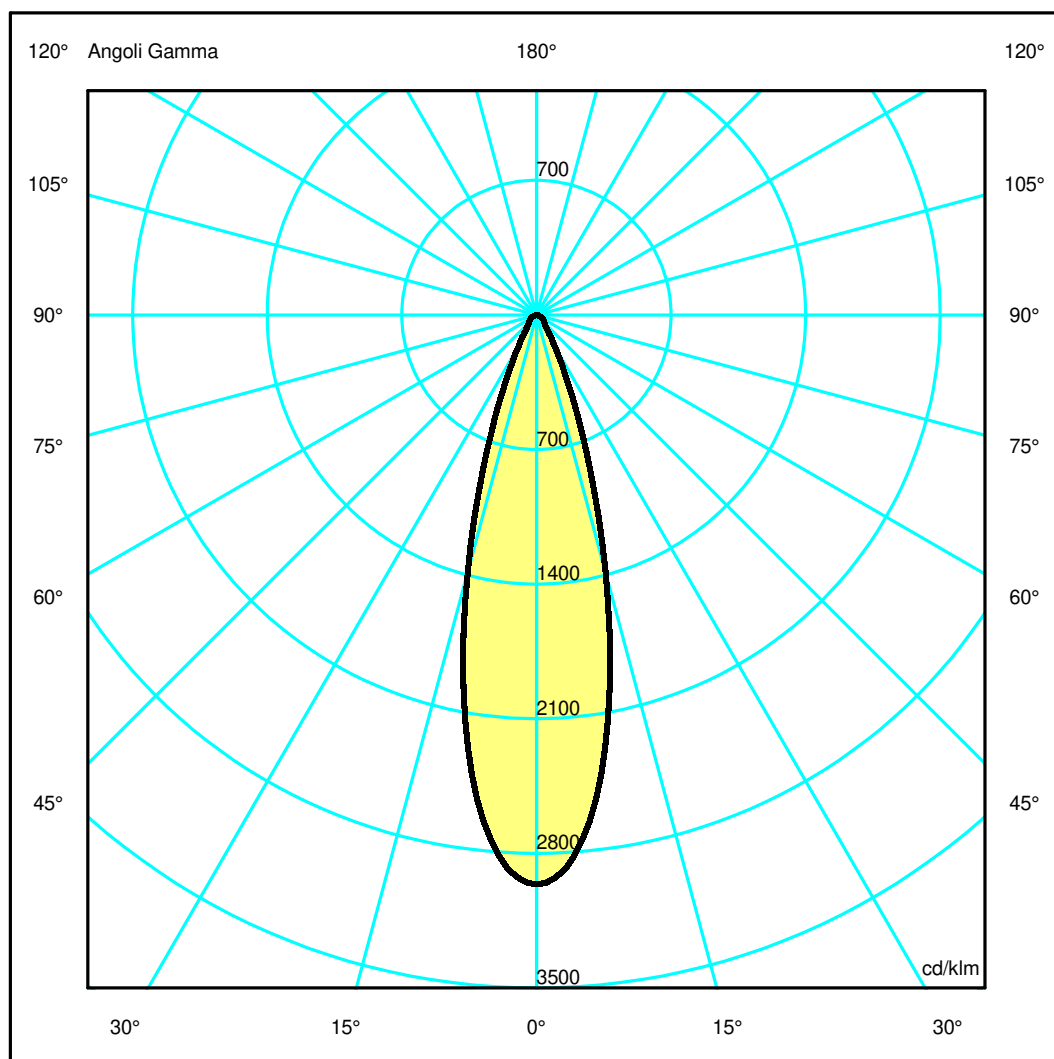

Luminaire

Code AX12411
Name HELGOLAND 120 ADJ 3000K FL BCO/BCO

Measurerm.


Code FTS2600010
Name HELGOLAND 120 ADJ 3000K FL BCO/BCO

| | | | | | | | |
|--|------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 1248 lm | Luminaire Power | 8.5 W | Efficacy | 146.824 lm/W | Efficiency | 100.00% |
| Source Flux | 1248 lm | Maximum value | 2961.35 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 120 mm | Height | 12 mm | | |
| Round Luminous Area | | Diam. | 89 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.006221 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.001505 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 02-04-2025 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 1248 lm | |
| LED Flux=1546lm LED Power=8.5W Eff=81% EfcLed=182lm/W EfcLum=147lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h | | | | | | | |
| C.I.E. | 88 96 99 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | 1.00 A | | | B NBN | BZ 1 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.26 | 0.51 | 0.77 | 1.02 | 1.28 | OC | 0.26 | 0.51 | 0.77 | 1.02 | 1.28 |
| OB | 0.26 | 0.51 | 0.77 | 1.02 | 1.28 | OD | 0.26 | 0.51 | 0.77 | 1.02 | 1.28 |

| | | | | | | | | | | |
|----|--------------------------------|---------|---------|--------|--------|-------|-------|-------|-------|------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 3695.77 | 3418.87 | 1730.34 | 477.98 | 134.56 | 70.73 | 53.49 | 32.88 | 15.39 | 3.64 |
| OB | 3695.77 | 3418.87 | 1730.34 | 477.98 | 134.56 | 70.73 | 53.49 | 32.88 | 15.39 | 3.64 |
| OC | 3695.77 | 3418.87 | 1730.34 | 477.98 | 134.56 | 70.73 | 53.49 | 32.88 | 15.39 | 3.64 |
| OD | 3695.77 | 3418.87 | 1730.34 | 477.98 | 134.56 | 70.73 | 53.49 | 32.88 | 15.39 | 3.64 |

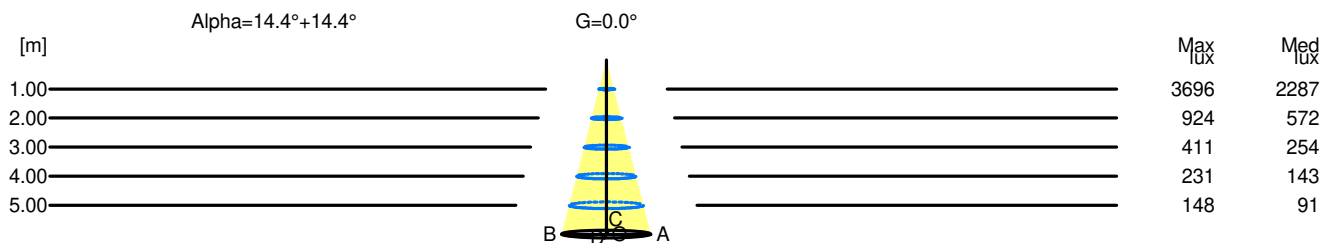

| H[m] | D[m] | Max lux | Med lux | Alpha=14.4°+14.4° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.51 | 3696 | 2287 | | |
| 2.00 | 1.02 | 924 | 572 | | |
| 3.00 | 1.54 | 411 | 254 | | |
| 4.00 | 2.05 | 231 | 143 | | |
| 5.00 | 2.56 | 148 | 91 | | |