


Luminaire

Code 1552W10APP
Name ARRIVAL F APP 2700K ORO

Measurem.

Code FTS2600108
Name ARRIVAL F APP 2700K ORO

Luminaire Flux	2300 lm	Luminaire Power	77.0 W	Efficacy	29.870 lm/W	Efficiency	100.00%
Source Flux	2300 lm	Maximum value	105.76 cd/klm	Position	C=100.00 G=93.00	CG	Asymmetrical
Round Luminaire		Diam.	373 mm	Height	1920 mm		
Round Luminous Area		Diam.	373 mm	Height	1920 mm		
Horizontal Luminous Area		0.109272 m2		Emitting area on Plane 180°		0.716160 m2	
Emitting area on Plane 0°		0.716160 m2		Emitting area on Plane 270°		0.716160 m2	
Emitting area on Plane 90°		0.716160 m2		Glare area at 76°		0.721322 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		05-03-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2300 lm	
LED Flux=6536lm LED Power=62,88W Eff=35% EfcLed=104lm/W EfcLum=30lm/W CCT=2700K Ra=90 SDCM=3 L70(6k)=36000h							
C.I.E.	17 41 70 49 100			D DIN 5040		C12	
F UTE	0.49 J + 0.51 T			B NBN		BZ 10	

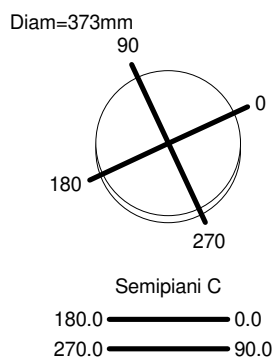

ULOR 51.50 %
DLOR 48.50 %
RN 51.50 %

