

Luminaire

Code AX12611
Name HELGOLAND 120 ADJ 2700K WF BCO/BCO

Measurem.

Code FTS2600047
Name HELGOLAND 120 ADJ 2700K WF BCO/BCO

Luminaire Flux	1295 lm	Luminaire Power	8.5 W	Efficacy	152.353 lm/W	Efficiency	100.00%
Source Flux	1295 lm	Maximum value	2335.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1295 lm	
LED Flux=1458lm LED Power=8.5W Eff=89% EfcLed=171lm/W EfcLum=152lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=120mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

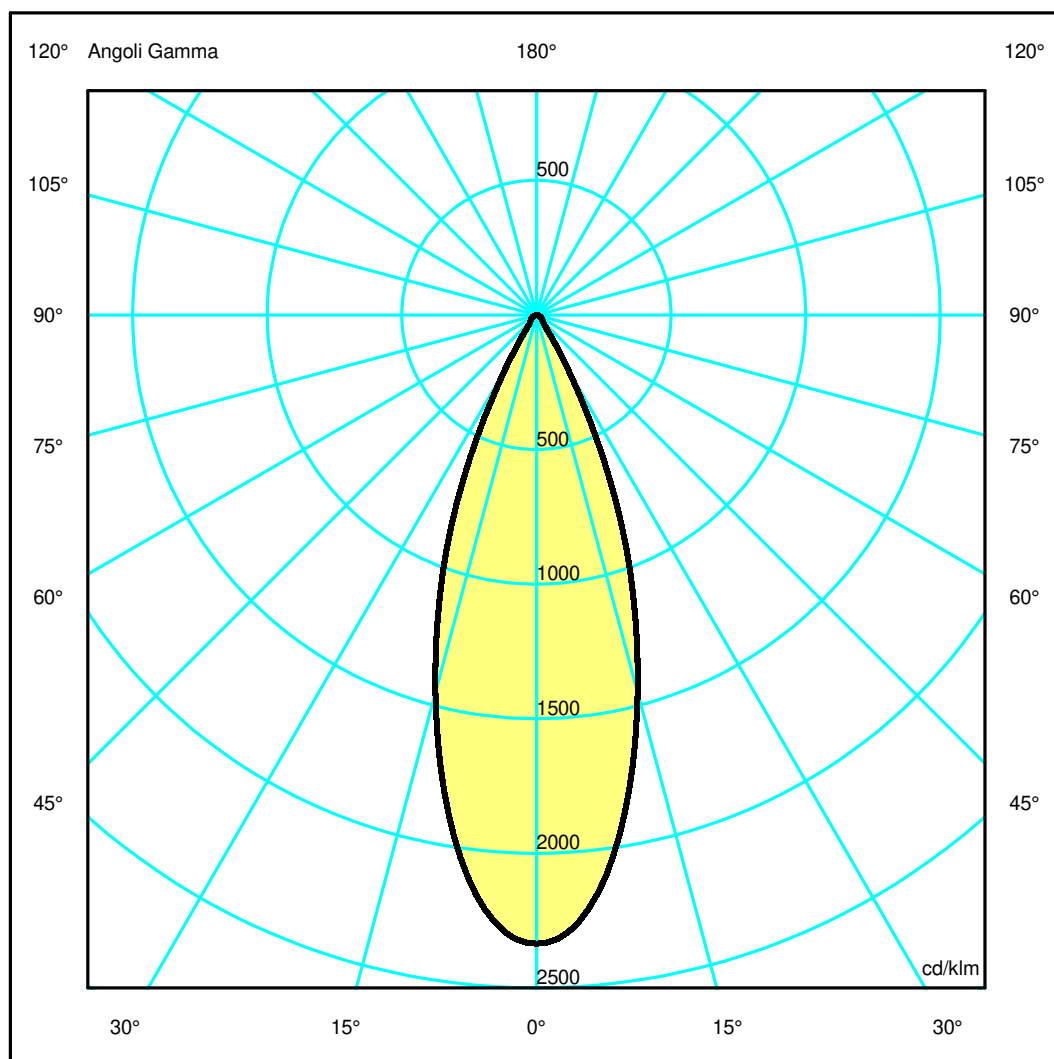

Luminaire

Code AX12611
Name HELGOLAND 120 ADJ 2700K WF BCO/BCO

Measurem.


Code FTS2600047
Name HELGOLAND 120 ADJ 2700K WF BCO/BCO

Luminaire Flux	1295 lm	Luminaire Power	8.5 W	Efficacy	152.353 lm/W	Efficiency	100.00%
Source Flux	1295 lm	Maximum value	2335.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1295 lm	
LED Flux=1458lm LED Power=8.5W Eff=89% EfcLed=171lm/W EfcLum=152lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	93 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.66	0.99	1.32	1.65	OC	0.33	0.66	0.99	1.32	1.65
OB	0.33	0.66	0.99	1.32	1.65	OD	0.33	0.66	0.99	1.32	1.65

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3024.41	2868.68	1881.11	757.71	104.97	41.81	31.19	21.46	11.39	3.12
OB	3024.41	2868.68	1881.11	757.71	104.97	41.81	31.19	21.46	11.39	3.12
OC	3024.41	2868.68	1881.11	757.71	104.97	41.81	31.19	21.46	11.39	3.12
OD	3024.41	2868.68	1881.11	757.71	104.97	41.81	31.19	21.46	11.39	3.12

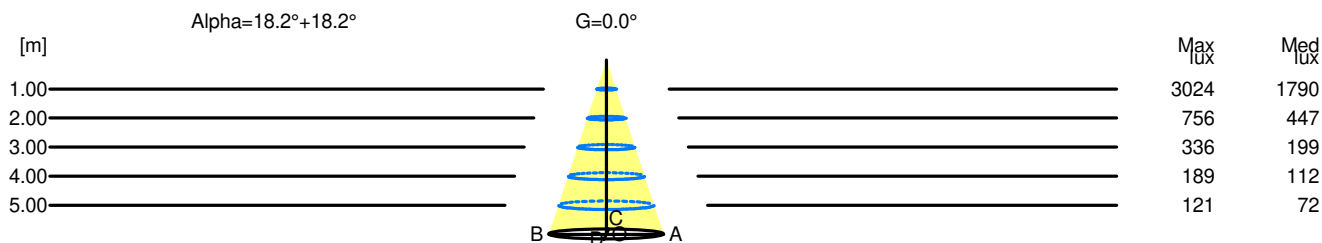

H[m]	D[m]	Max lux	Med lux	Alpha=18.2°+18.2°	G=0.0
1.00	0.66	3024	1790		
2.00	1.32	756	447		
3.00	1.98	336	199		
4.00	2.64	189	112		
5.00	3.30	121	72		