

Luminaire

Code AX12811
Name HELGOLAND 120 ADJ 2700K XF BCO/BCO

Measurem.

Code FTS2600048
Name HELGOLAND 120 ADJ 2700K XF BCO/BCO

Luminaire Flux	1276 lm	Luminaire Power	8.5 W	Efficacy	150.118 lm/W	Efficiency	100.00%
Source Flux	1276 lm	Maximum value	1138.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1276 lm	
LED Flux=1458lm LED Power=8.5W Eff=88% EfcLed=171lm/W EfcLum=150lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	91 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=120mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

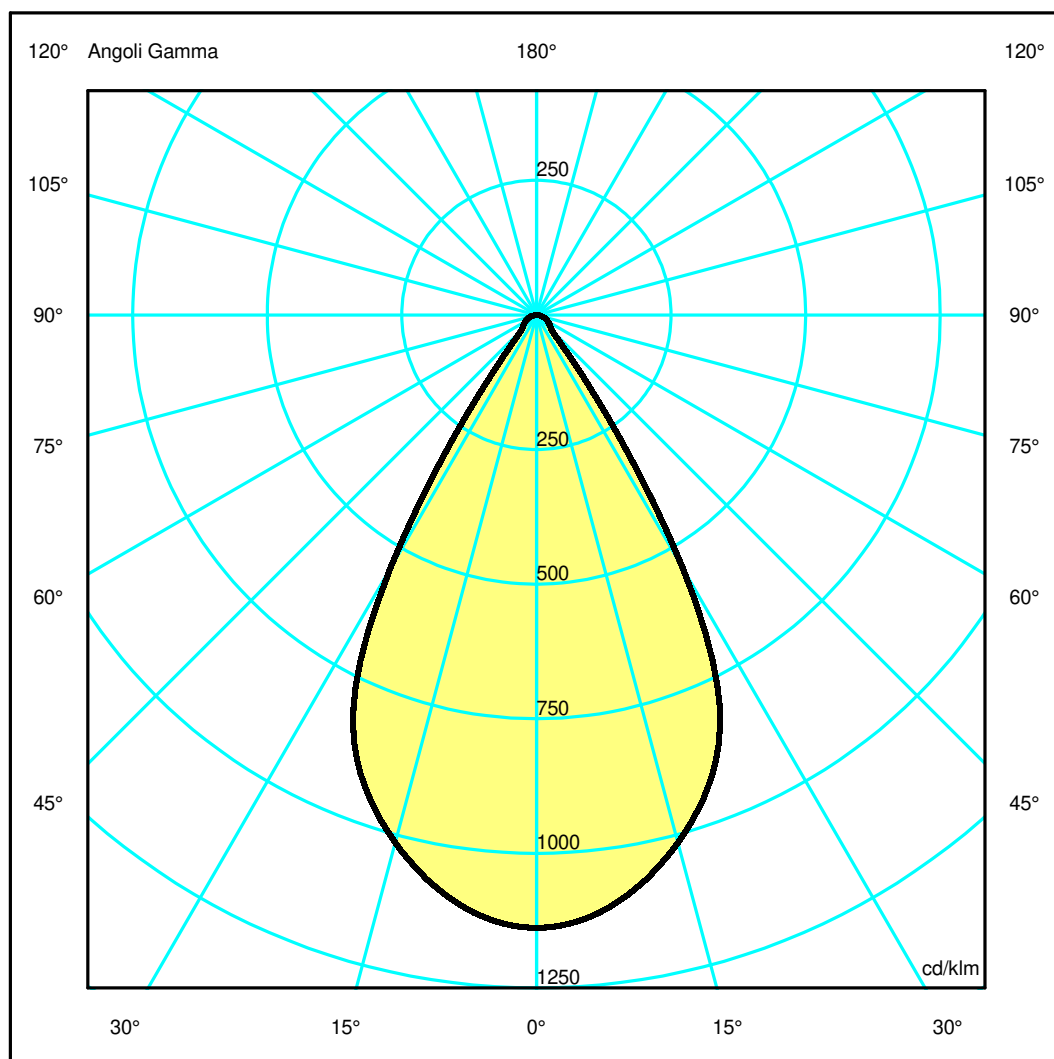

Luminaire

Code AX12811
Name HELGOLAND 120 ADJ 2700K XF BCO/BCO

Measurem.


Code FTS2600048
Name HELGOLAND 120 ADJ 2700K XF BCO/BCO

Luminaire Flux	1276 lm	Luminaire Power	8.5 W	Efficacy	150.118 lm/W	Efficiency	100.00%
Source Flux	1276 lm	Maximum value	1138.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	120 mm	Height	12 mm		
Round Luminous Area		Diam.	89 mm	Height	0 mm		
Horizontal Luminous Area		0.006221 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001505 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		03-04-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1276 lm	
LED Flux=1458lm LED Power=8.5W Eff=88% EfcLed=171lm/W EfcLum=150lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	91 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.57	1.14	1.70	2.27	2.84	OC	0.57	1.14	1.70	2.27	2.84
OB	0.57	1.14	1.70	2.27	2.84	OD	0.57	1.14	1.70	2.27	2.84

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1452.42	1432.30	1294.66	1027.62	290.87	51.21	36.99	26.36	15.64	4.47
OB	1452.42	1432.30	1294.66	1027.62	290.87	51.21	36.99	26.36	15.64	4.47
OC	1452.42	1432.30	1294.66	1027.62	290.87	51.21	36.99	26.36	15.64	4.47
OD	1452.42	1432.30	1294.66	1027.62	290.87	51.21	36.99	26.36	15.64	4.47

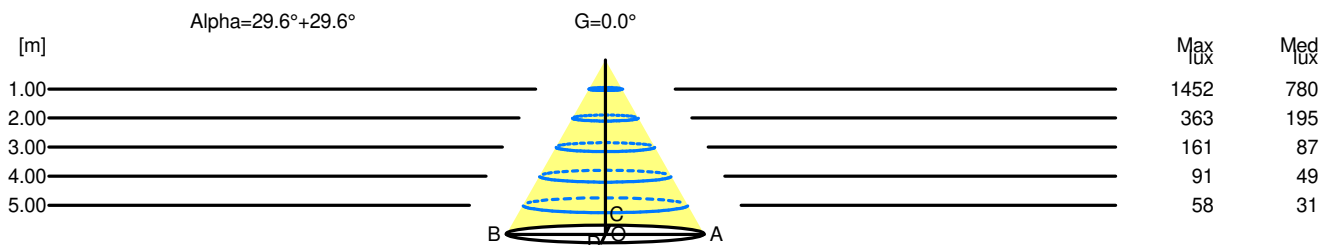

H[m]	D[m]	Max lux	Med lux	Alpha=29.6°+29.6°	G=0.0
1.00	1.14	1452	780		
2.00	2.27	363	195		
3.00	3.41	161	87		
4.00	4.54	91	49		
5.00	5.68	58	31		