

A.24

Carlotta de Bevilacqua



Artemide®

A.24

A.24

Carlotta de Bevilacqua
2017

PATENT OF
INVENTION



ARTEMIDE
APP




For further information on A.24
visit artemide.com



A.24

Carlotta de Bevilacqua
2017


A.24 is innovative and flexible system to design light in space. A single profile, only 24 mm thick, can be installed in the recessed, ceiling or suspension mode to continuously follow the angles on a flat or three-dimensional surface. This profile hosts to a variety of performance options: diffused light, sharp optical units with two beam angles, or a smart magnetic track. This makes A.24 a flexible system, as well as an open platform to accommodate other products from the Architectural collection. The suspension version also features indirect emission. The three solutions can be alternated to match the architecture and the room functions with utmost flexibility. The competence of Artemide is revealed by the quality of light, as well as by the ability of A.24 to freely move in space, with direct power connection points up to 14 metres apart.

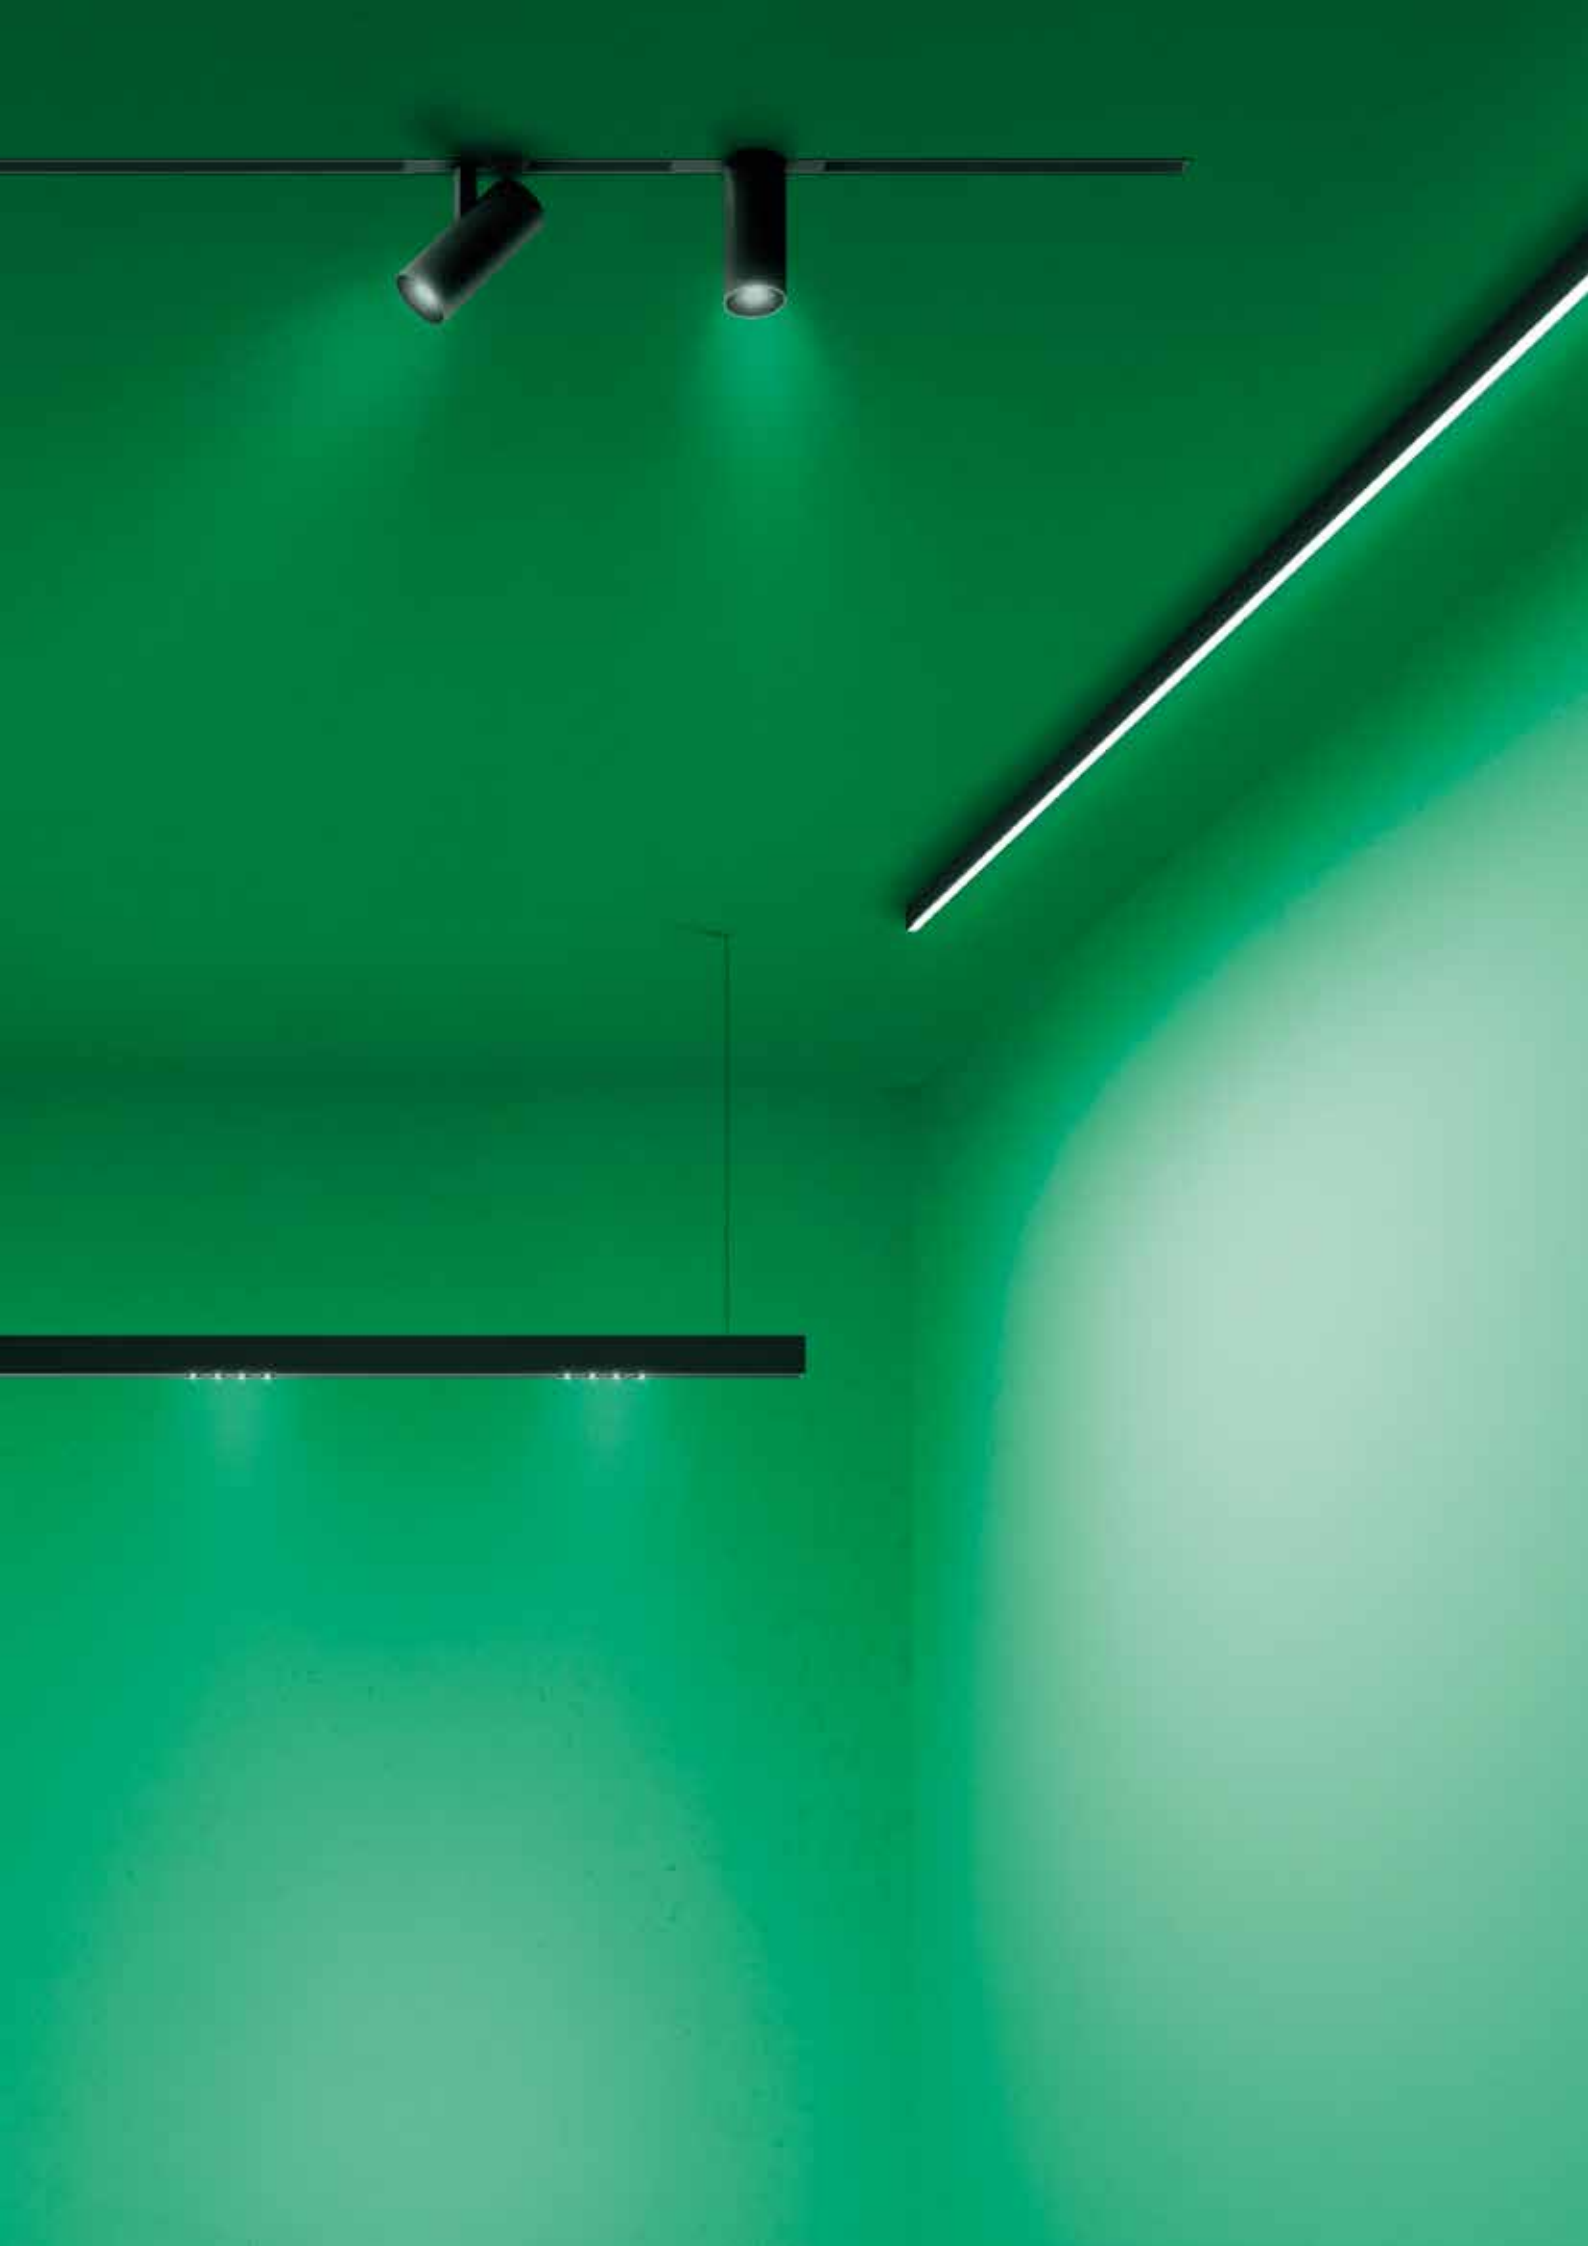





A.24 system




90° ANGLE MAGNETIC
301 x 301 mm



90° ANGLE DIFFUSED
301 x 301 mm



90° ANGLE SHARPING
301 x 301 mm

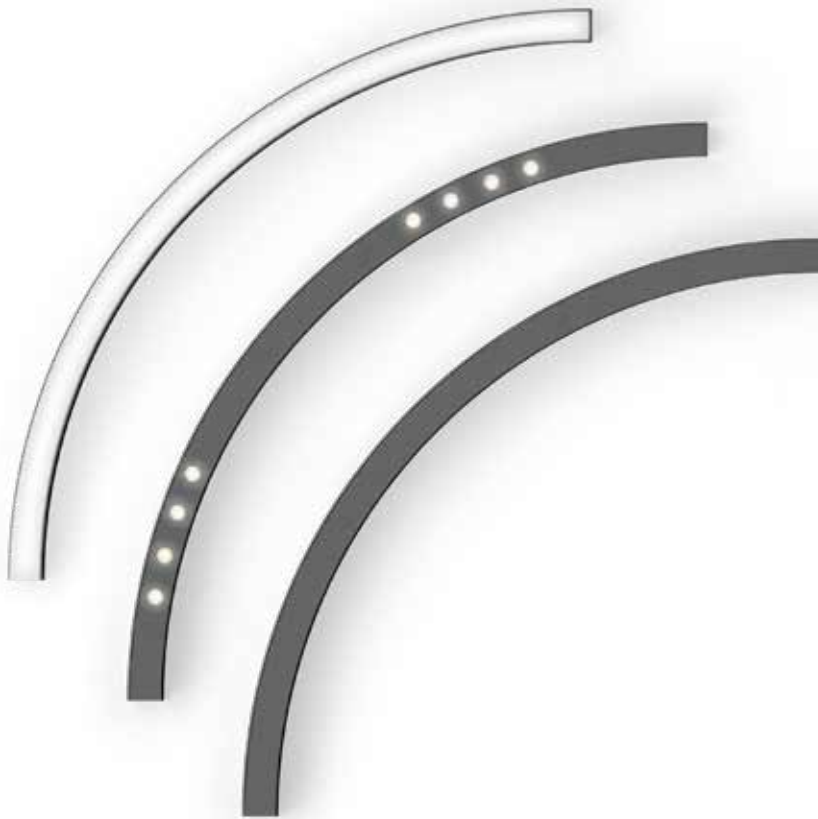

CIRCULAR DIFFUSED

RADIUS 561 mm (60° - 90°)

RADIUS 750 mm (45° - 90°)

CIRCULAR SHARPING

RADIUS 561 mm (60° - 90°)

RADIUS 750 mm (45° - 90°)

CIRCULAR MAGNETIC

RADIUS 561 mm (60° - 90°)

RADIUS 750 mm (45° - 90°)

LINEAR MAGNETIC TRACK

1176 - 2352 mm



LINEAR DIFFUSED

1176 - 2352 mm




LINEAR SHARPING

1176 - 2352 mm




A.24 system

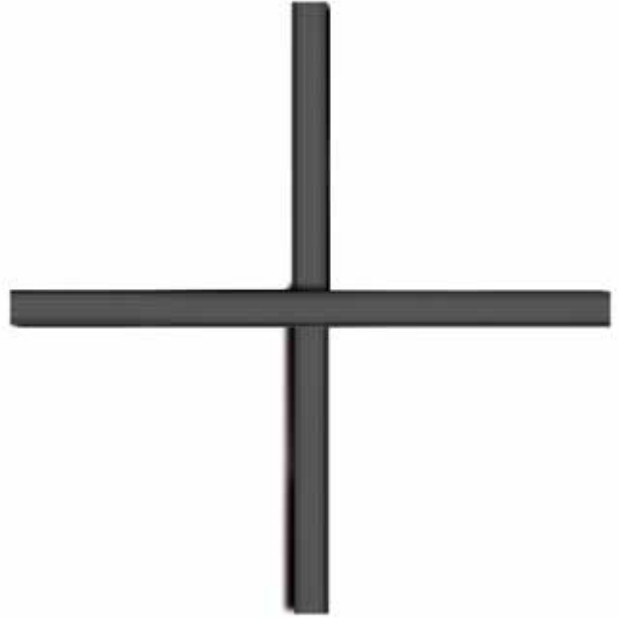


X JOINT MAGNETIC
603 x 603 mm



T JOINT MAGNETIC
603 X 315 mm

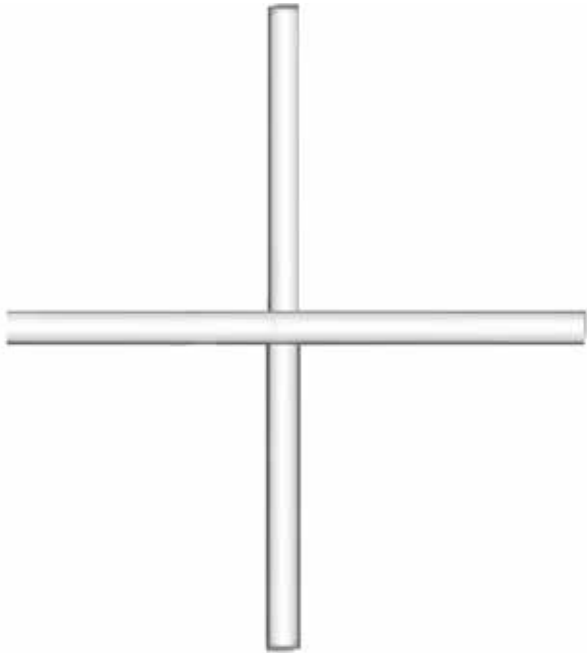

X JOINT DIFFUSED
603 x 603 mm

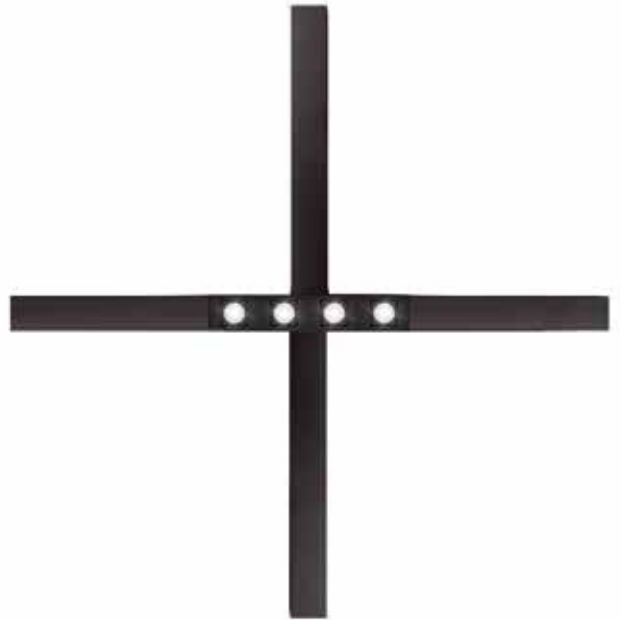

X JOINT SHARPING
603 x 603 mm



T JOINT DIFFUSED
603 X 315 mm




T JOINT SHARPING
603 X 315 mm





A.24 stand-alone typologies



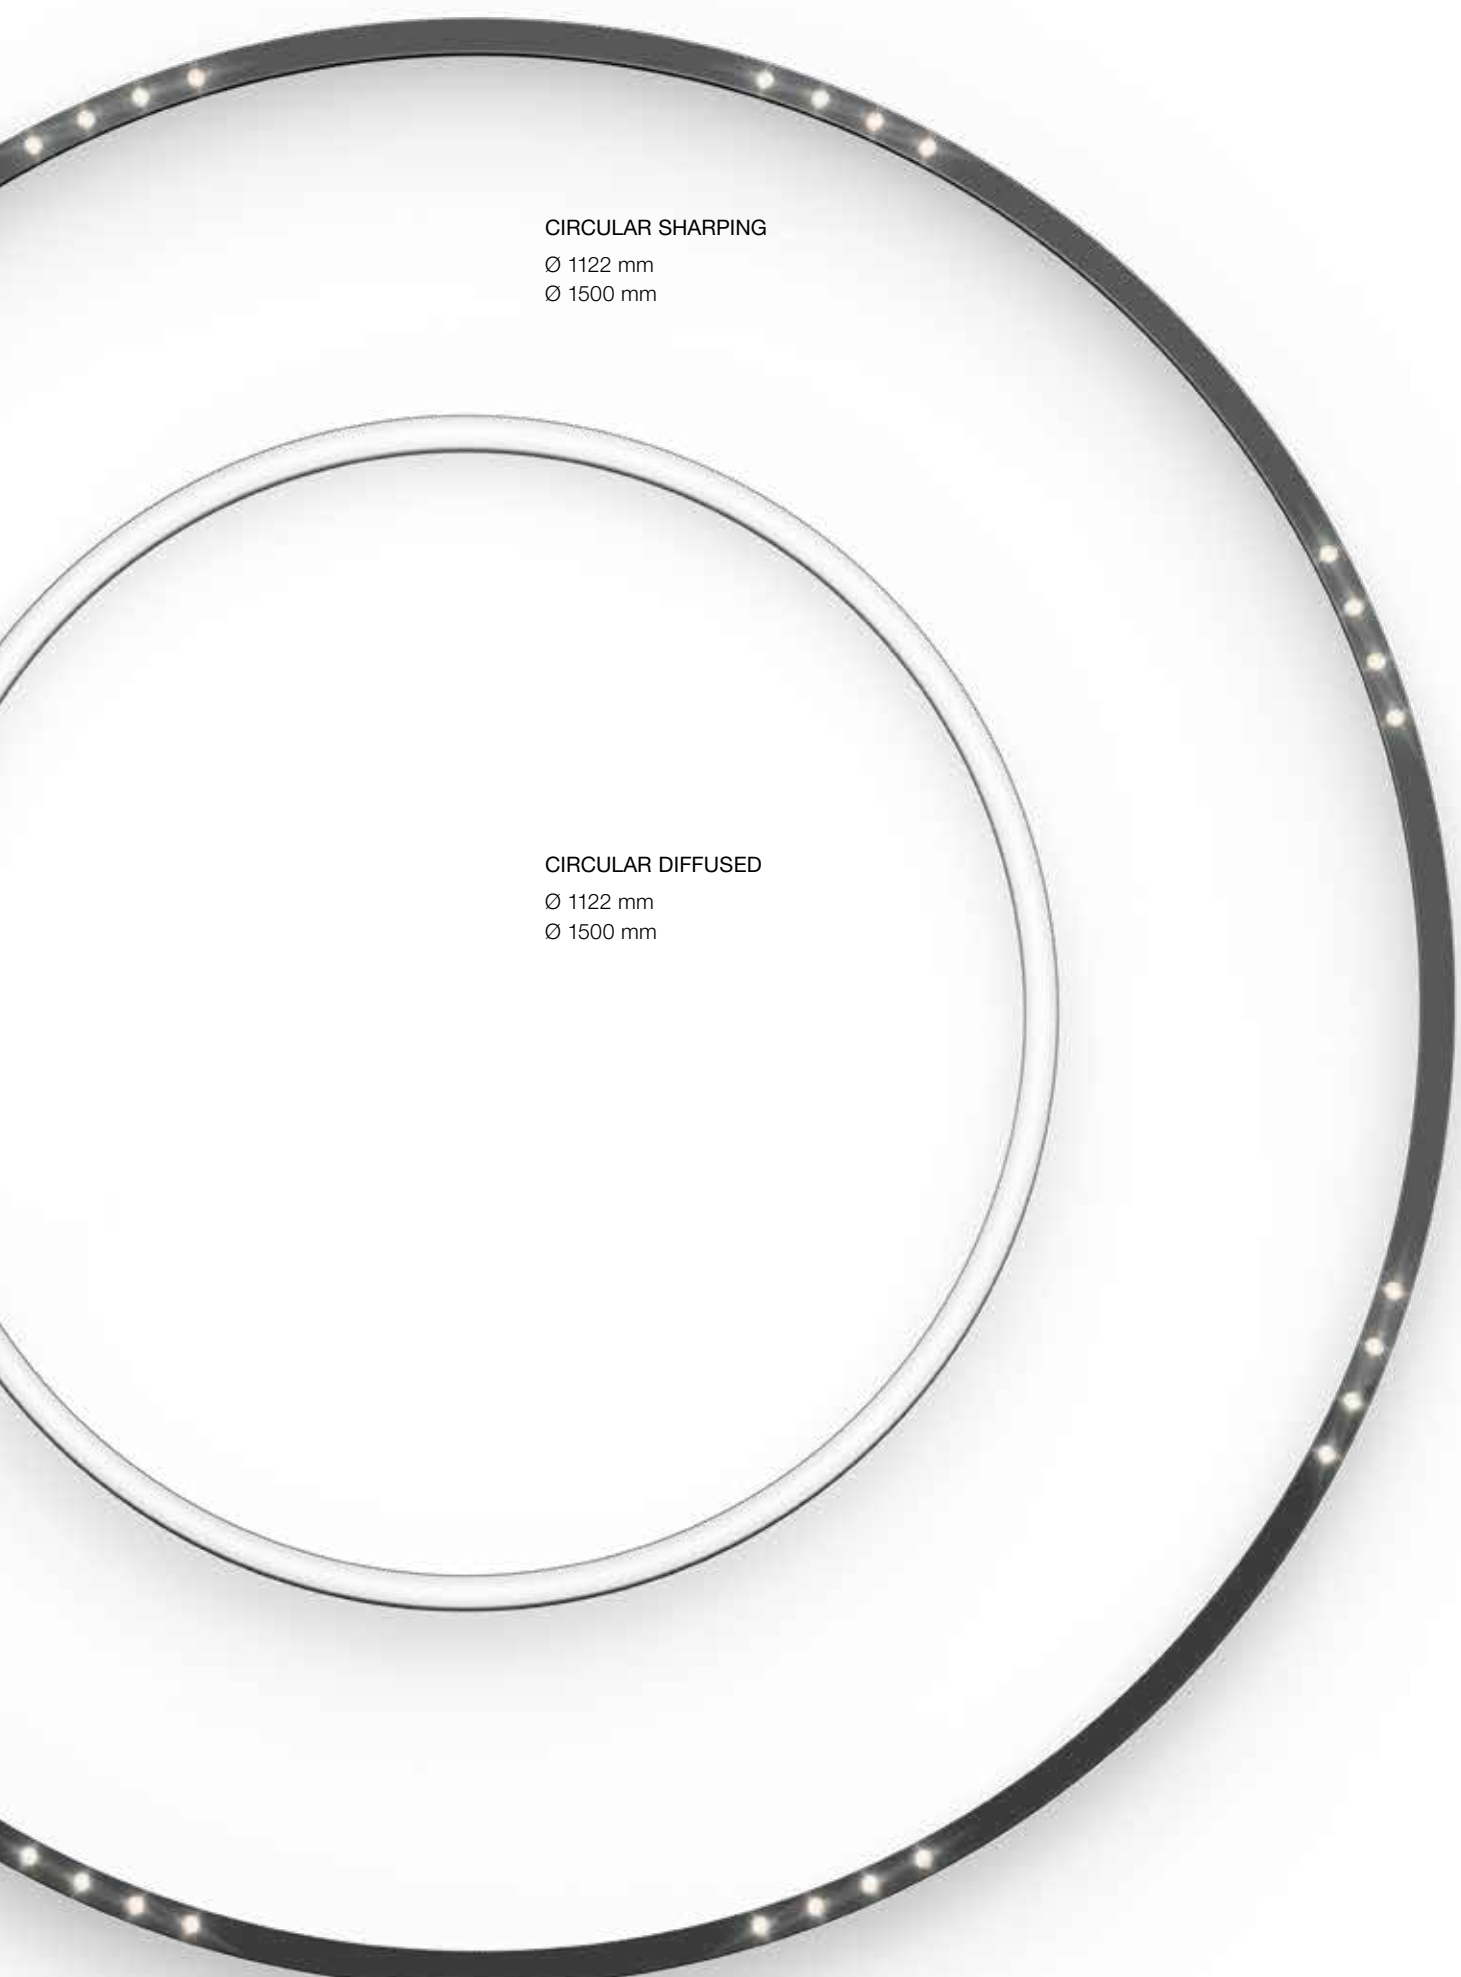

CIRCULAR SHARPING

Ø 1122 mm

Ø 1500 mm

CIRCULAR DIFFUSED

Ø 1122 mm


Ø 1500 mm





A.24 / Vector colors

White

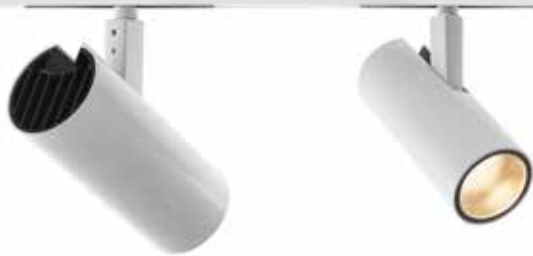

Black



Fast delivery

Bronze



Brushed Copper



Brushed Silver



Delivery time on demand

A.24

color temperatures



Fast delivery



Delivery time on demand


ADDRESS
1

A.24 is fully addressable

Each module and spot can be managed separately by Artemide App or by DALI control

ADDRESS
10

ADDRESS
9

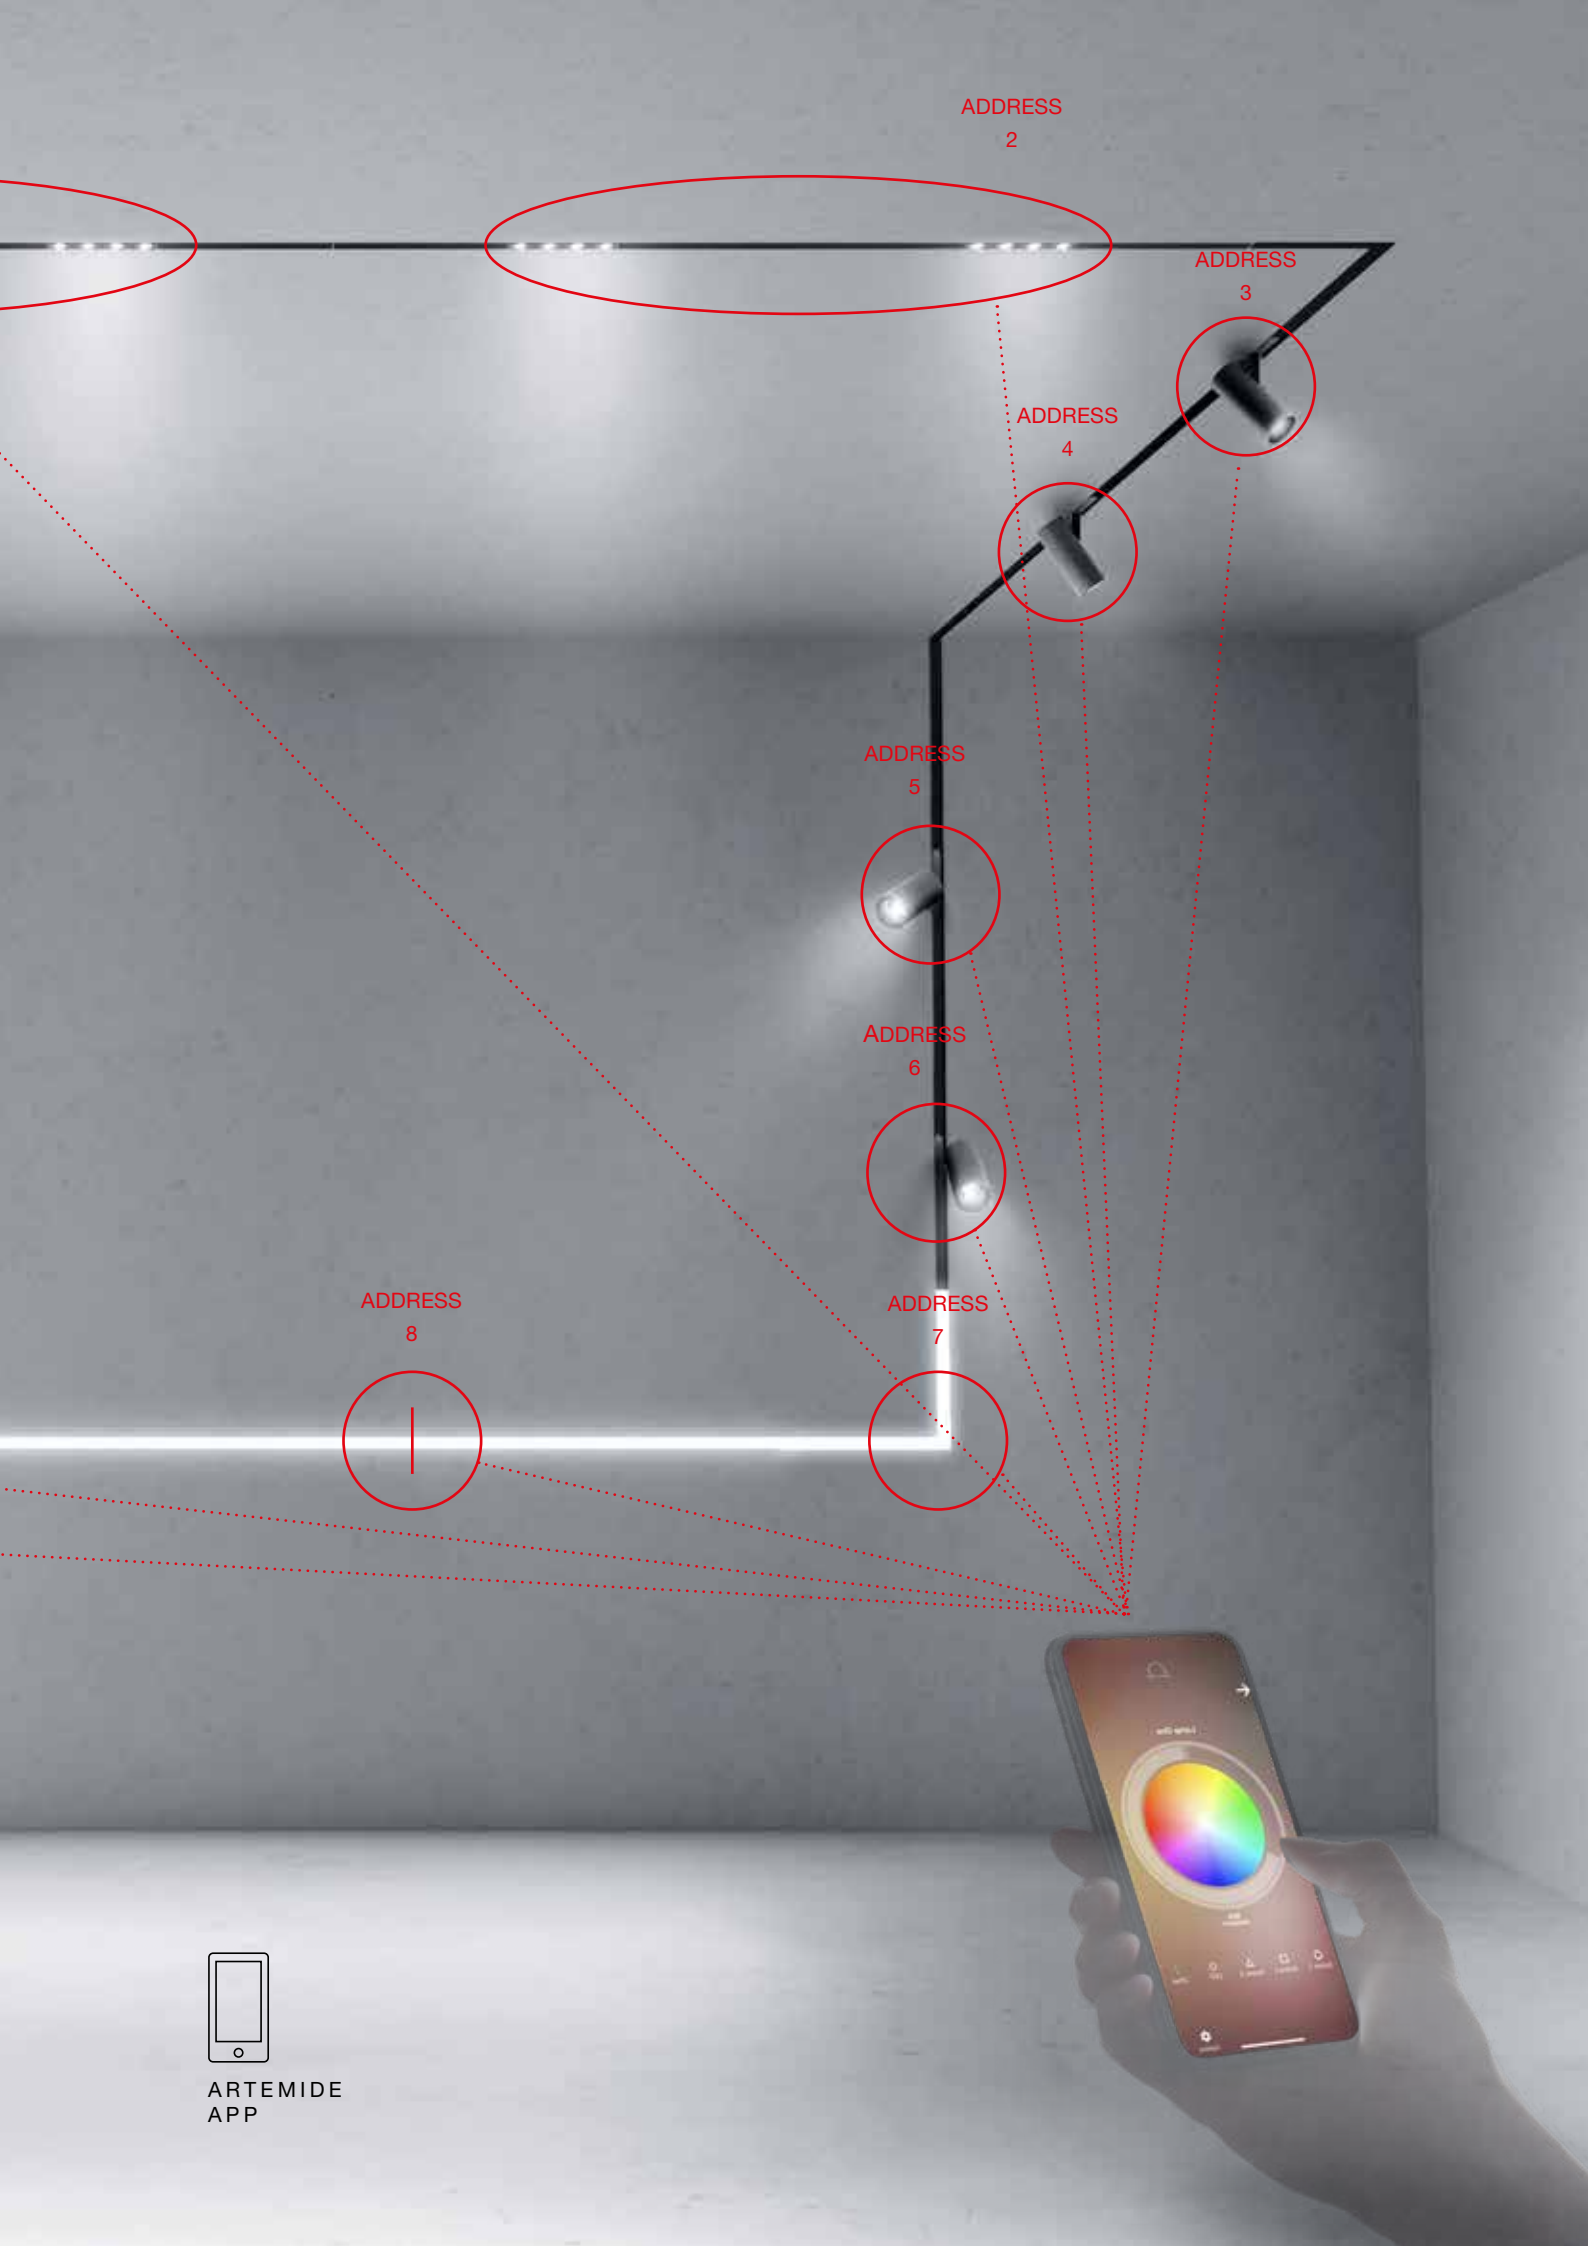

ADDRESS
2

ADDRESS
3

ADDRESS
4

ADDRESS
5

ADDRESS
6

ADDRESS
7

ADDRESS
8




ARTEMIDE
APP

16W / 33W
MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K




6,5W
*7W
MacAdam 3SDCM
CRI=90
CCT: 2700K / 3000K / 4000K




S 14°
329 lm *F 21°
335 lm *WF 28°
292 lm

9W
MacAdam 3SDCM
*MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



S 14°
541 lm *F 21°
584 lm WF 28°
529 lm

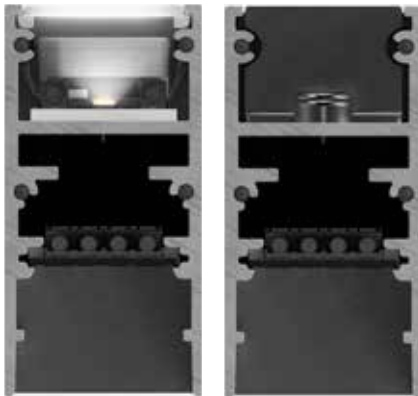

A.24 magnetic

19W
MacAdam 3SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



S 15°
1771 lm




F 22°
1811 lm



WF 31°
1878 lm

16W
MacAdam 3SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



S 22°
637 lm



WF 31°
1098 lm

Vector 55



Vector 55 zoom



A.24 magnetic is Artemide SELV

A unique feature developed for a real
safe DALI interface.



D.art® is a technology developed by Artemide that overcomes the safety limits of the DALI signal in devices where the same signal is accessible to the touch.



The DALI signal is transformed to a “SELV” voltage ensuring the total safety of the appliance.

A.24 has been designed in compliance with international certifications.





16W / 33W
MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K

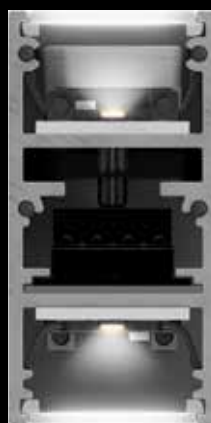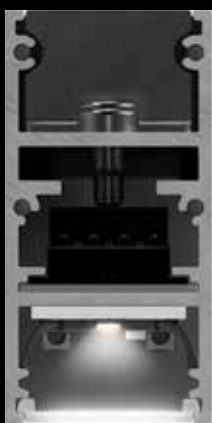



33W / 66W
MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



A.24 diffused



16W / 33W
MacAdam 2SDCM
CRI=90
CCT: 2700K / 3000K / 4000K

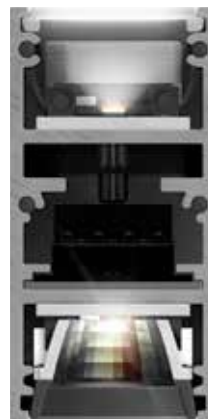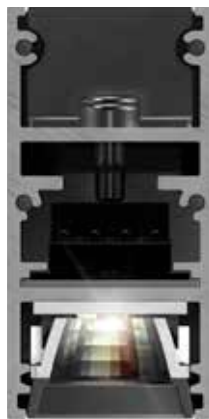

MacAdam 2SDCM / 3SDCM
CRI=90
CCT: 2700K / 3000K / 4000K



22W
S 24°



22W
XF 62°



45W
S 24°




45W
XF 62°

A.24 sharpening

RECESSED
TRIMLESS

CEILING

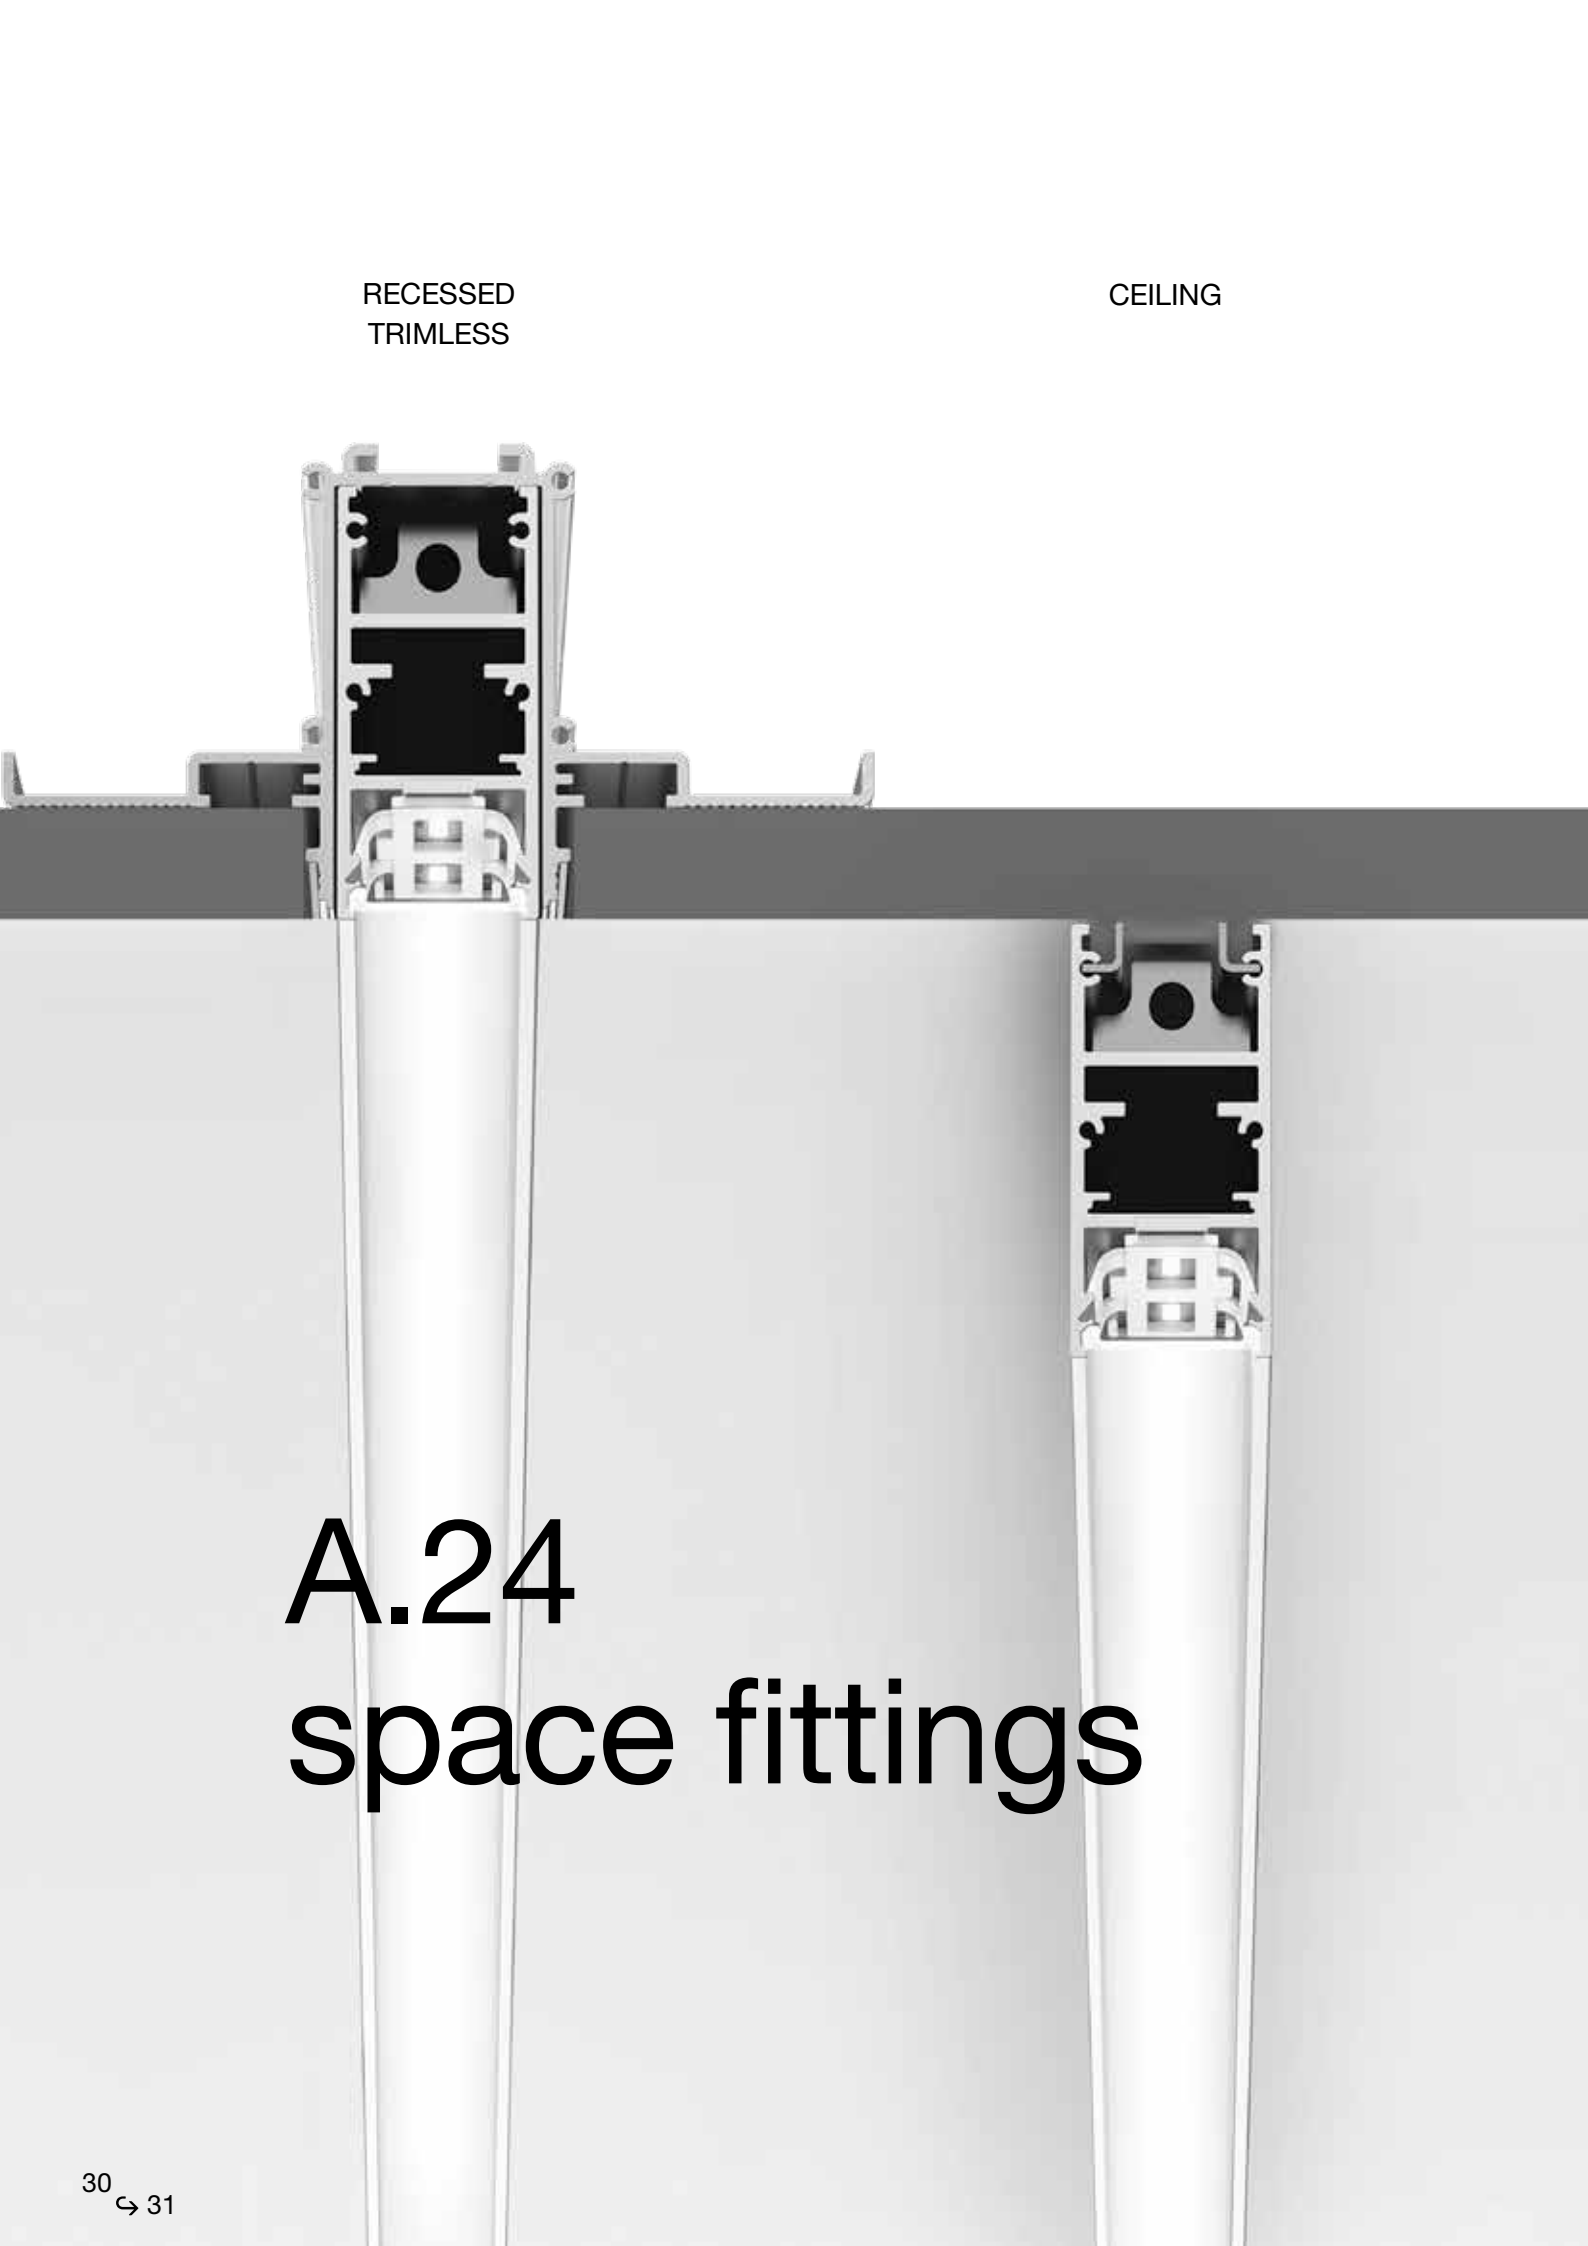

A technical cross-section diagram showing the installation of a recessed trimless ceiling fitting. The diagram illustrates a dark grey ceiling surface with a white cylindrical fitting installed. The fitting is secured by a metal bracket with a central screw. The bracket is shown in two positions: one where it is being installed into the ceiling and another where it is fully seated. The fitting is labeled 'A.24 space fittings'.

A.24 space fittings

SUSPENSION





SUSPENSION WITH
INDIRECT EMISSION



A.24 is balanced





NO TRACK'S ROTATION WHEN THE SPOTLIGHTS ARE TILTED IN THE SAME DIRECTION.
SUSPENSION CABLE WITHOUT STIFF STEMS.

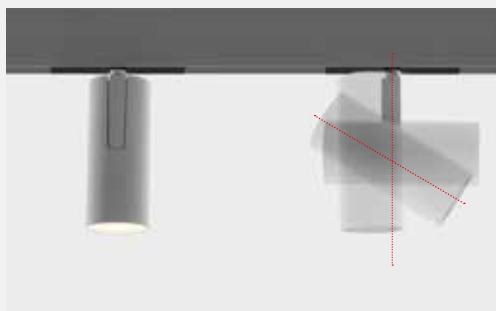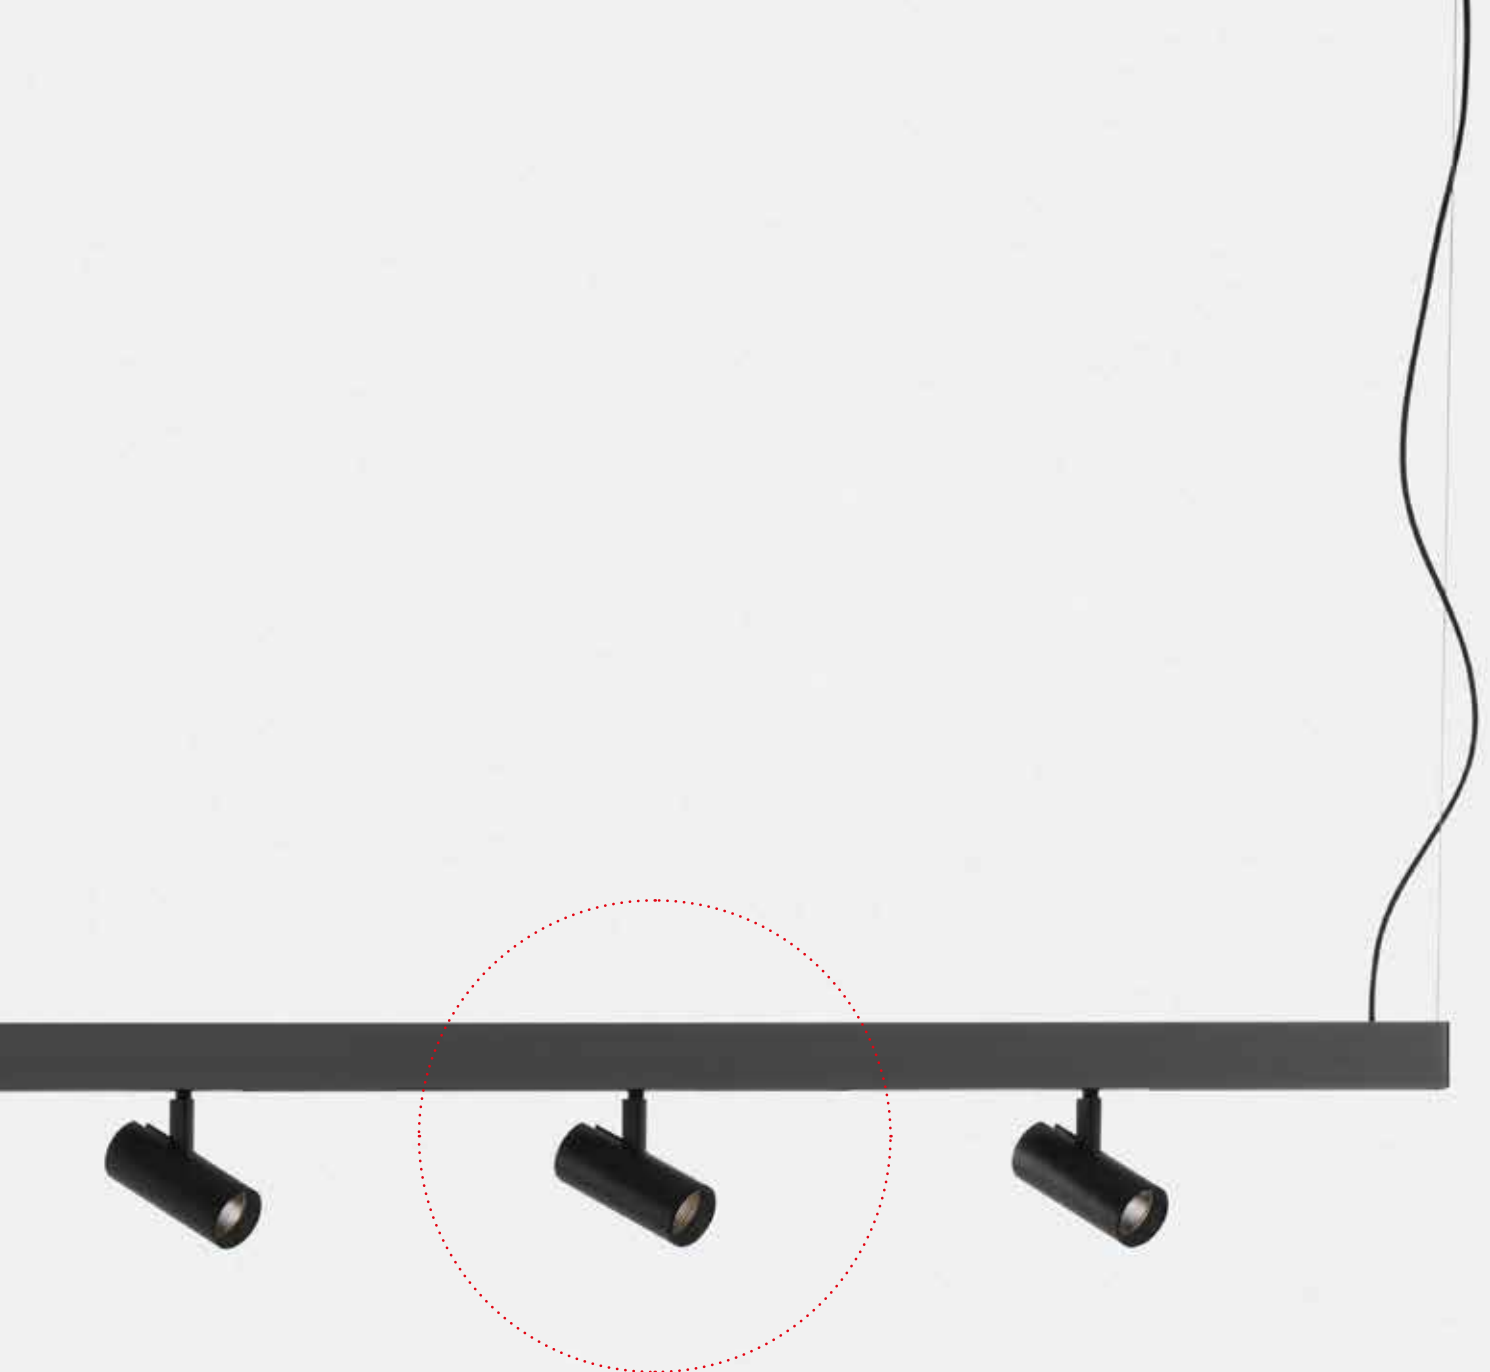



The junction arm is integrated with the spotlight body.

The center of balance is perfectly aligned with the track.

A.24 / Vector infinite possibilities

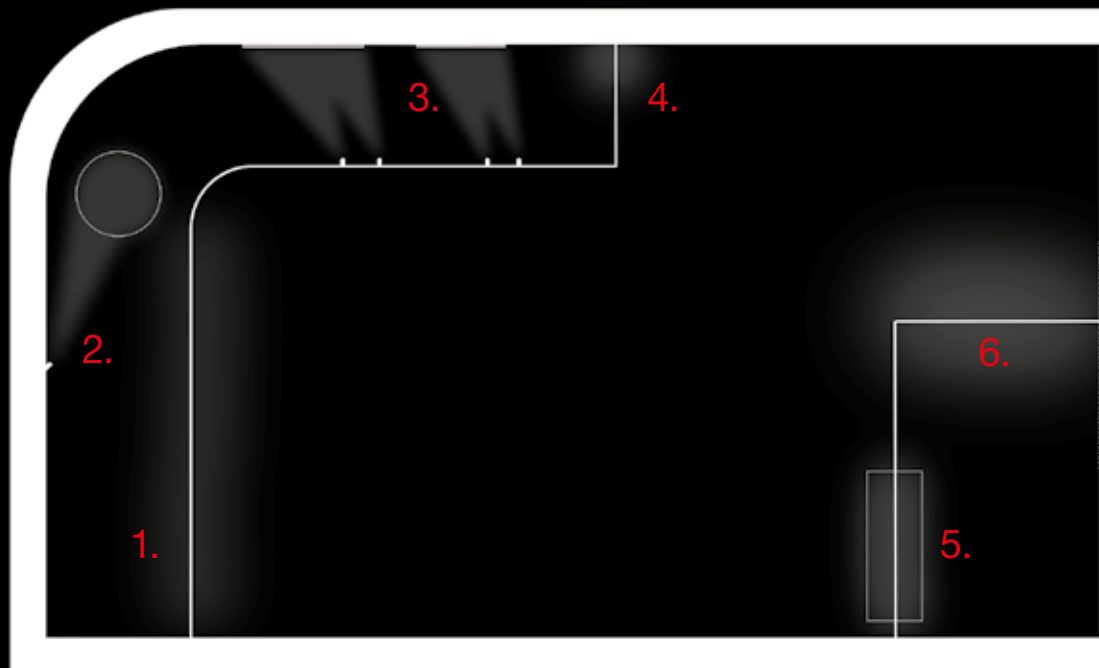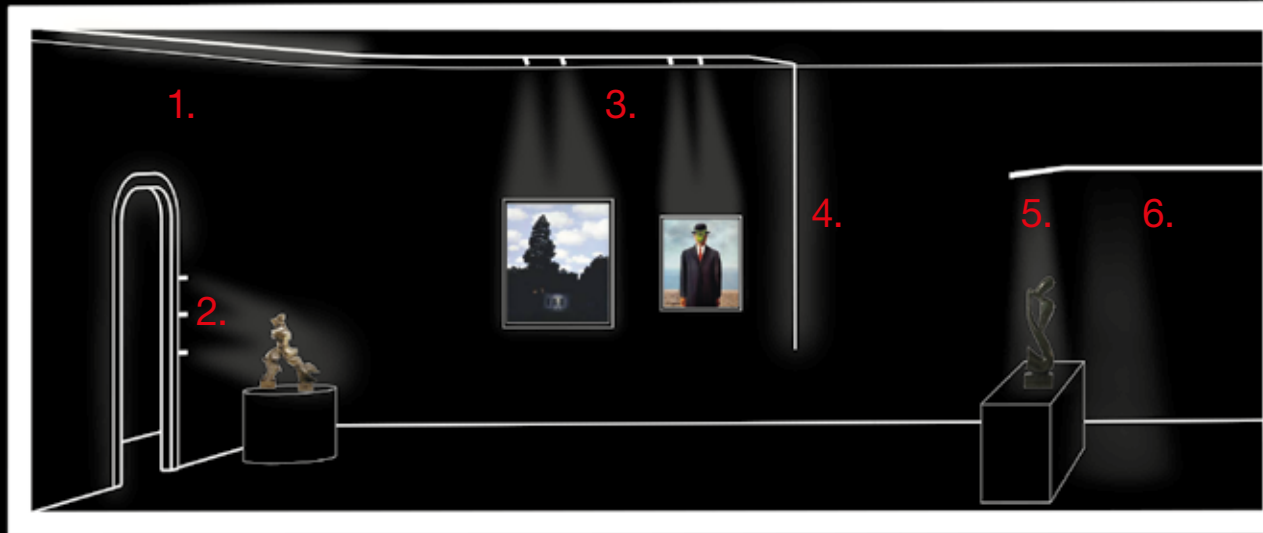

1. A.24 recessed diffused emission
2. Vector 40 magnetic
3. Vector 55 magnetic
4. A.24 ceiling - wall diffused emission
5. A.24 suspension sharpening emission 24°
6. A.24 suspension diffused emission
7. A.24 suspension sharpening emission 64°
8. Vector 55 zoom magnetic
9. Vector pendant securlock 40/55
10. A.24 suspension indirect diffused emission

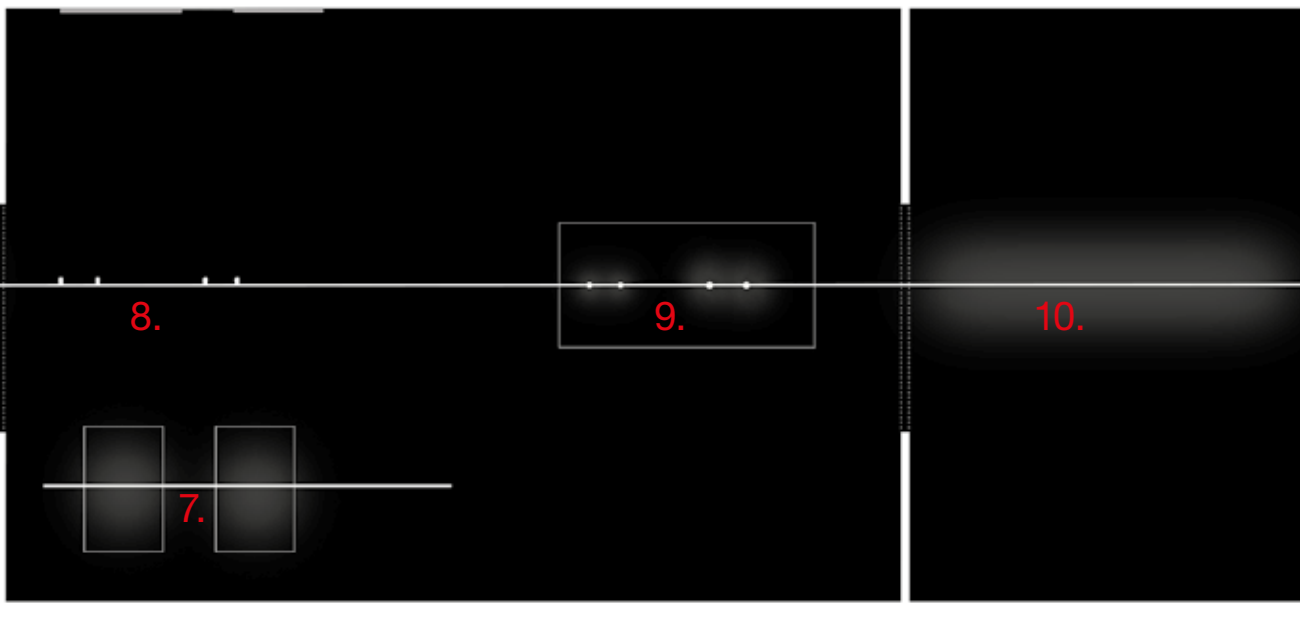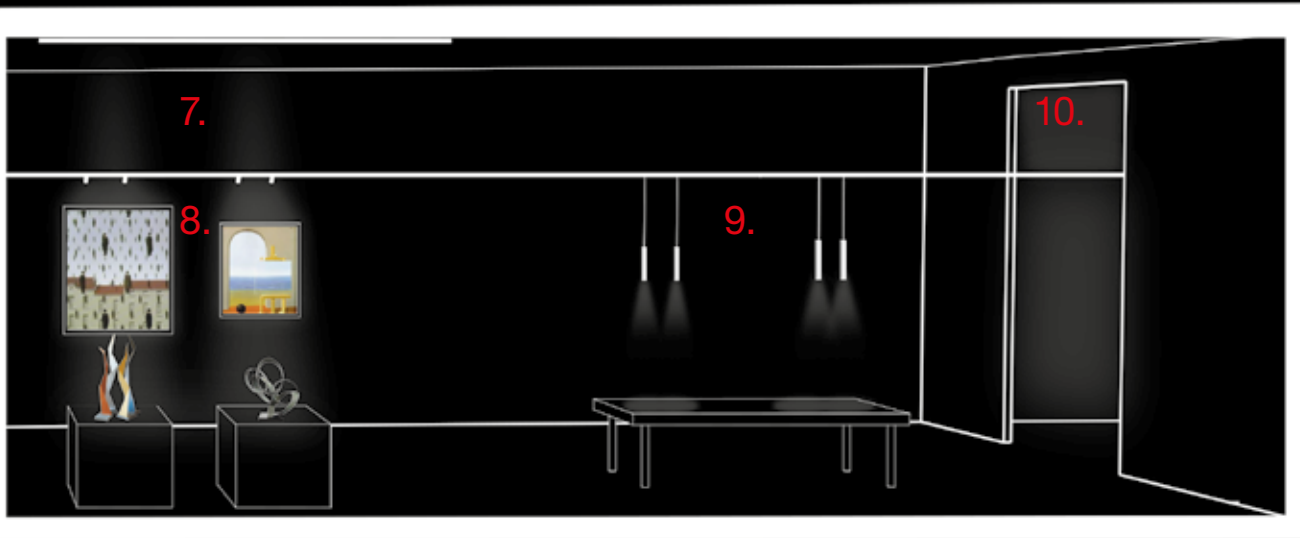

A.24

pre-configurated modules



Electrical connection



Mechanical connection

Each module (magnetic track, diffused, sharpening) is pre-configured and it is provided with:

01. the specific optical engine
(magnetic, diffused , sharpening).
02. the mechanical and electrical connections
to combine for a continuous run.
03. each suspension module is equipped
with a suspension cable.
04. each ceiling module is equipped
with 1 ceiling bracket for 1176 mm lenght or
with 2 ceiling brackets for 2352 mm lenght.






MAGNETIC TRACK

90° TRACK ELEMENT.

A.24 is powered by 48 Vdc

It permits long runs
in a small size 27x54 mm

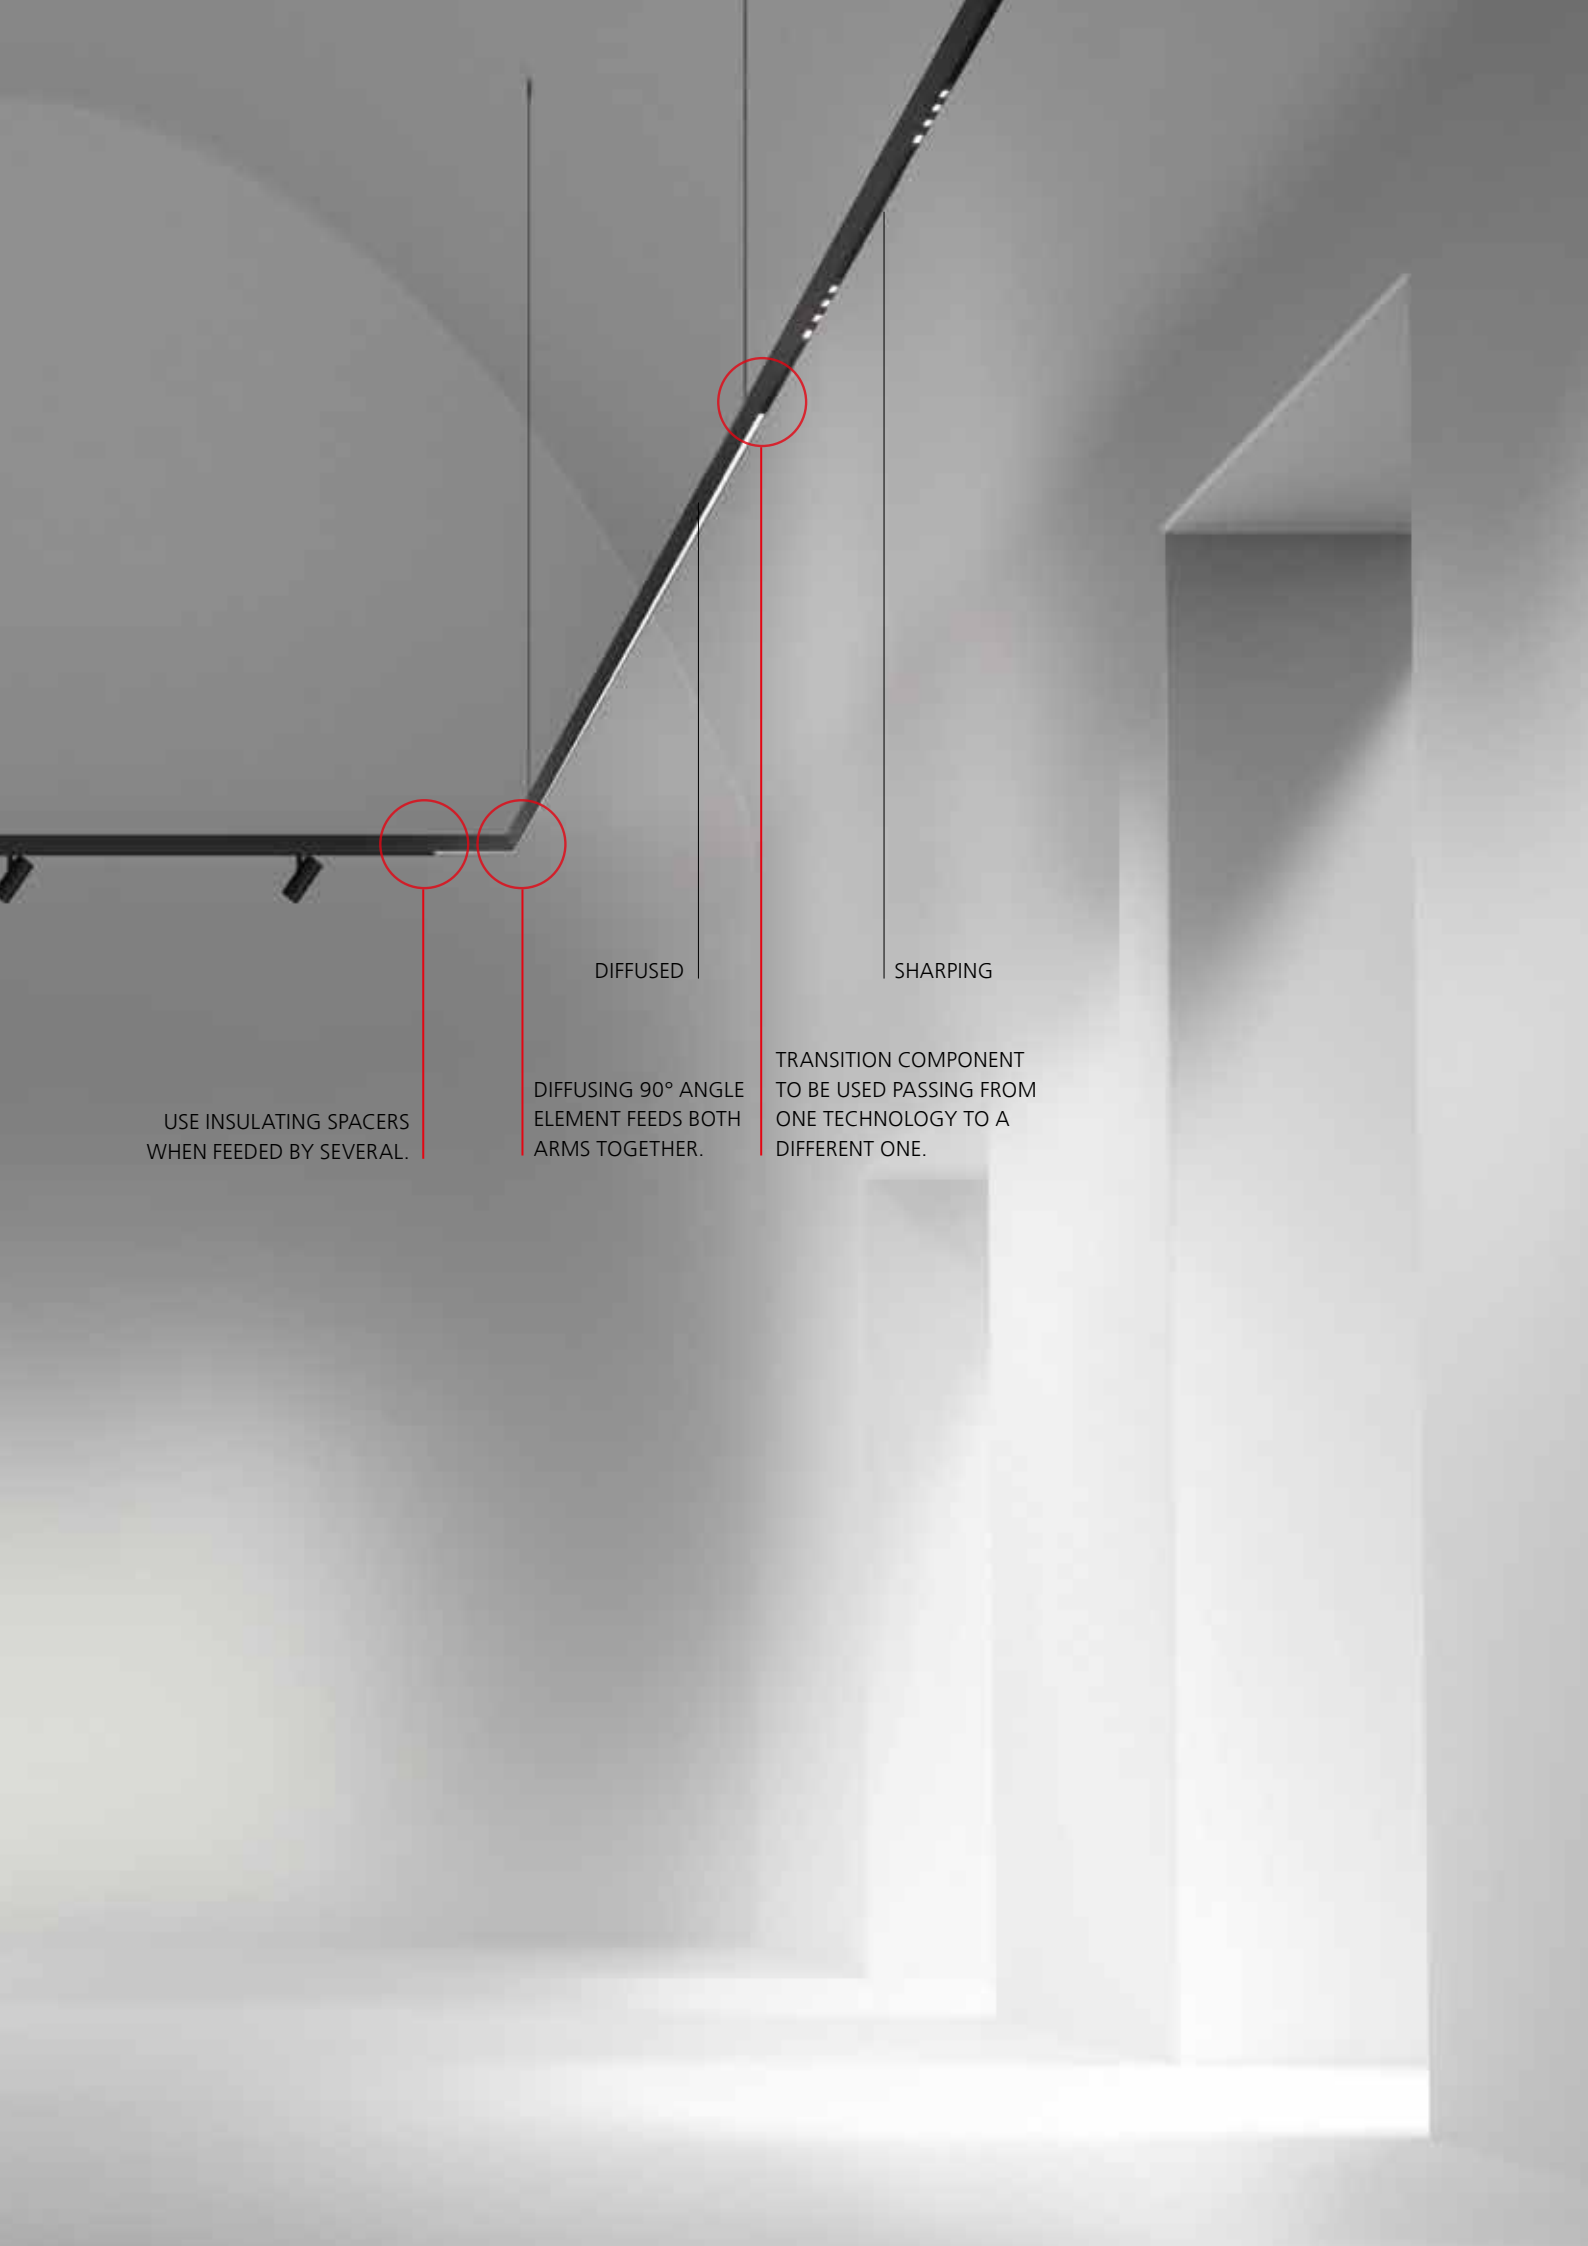

USE INSULATING SPACERS
WHEN FEEDED BY SEVERAL.

DIFFUSING 90° ANGLE
ELEMENT FEEDS BOTH
ARMS TOGETHER.


DIFFUSED

TRANSITION COMPONENT
TO BE USED PASSING FROM
ONE TECHNOLOGY TO A
DIFFERENT ONE.

SHARPING


A.24

power supply kit

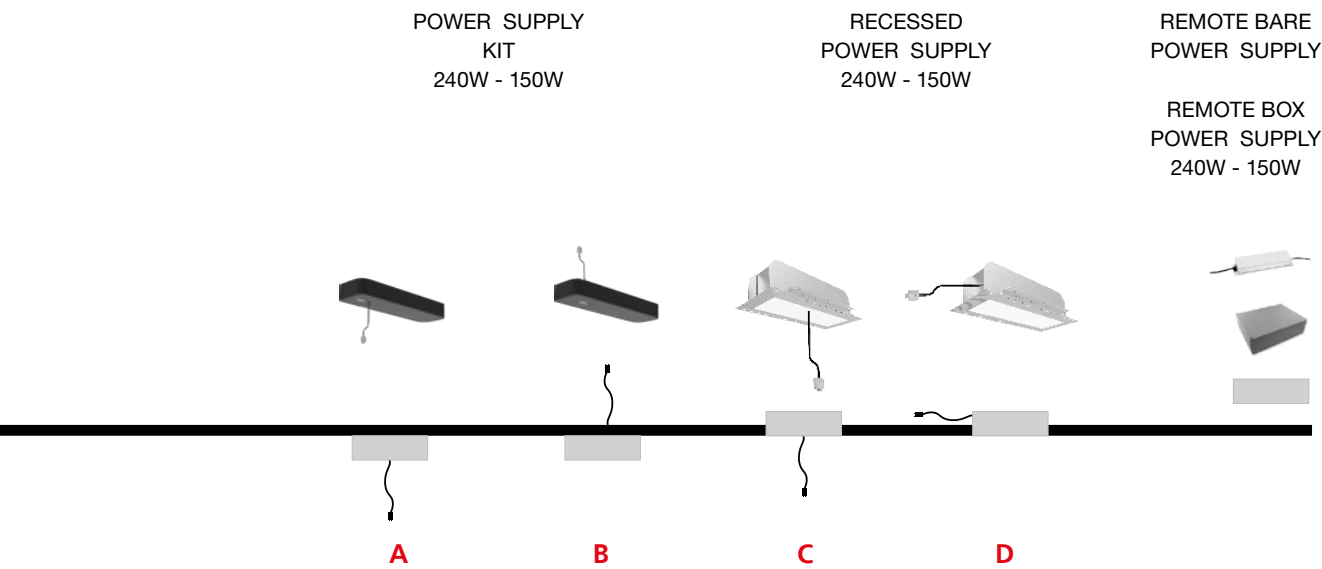


SUSPENSION	A	B	C	D	
SMD					
RECESSED					


A

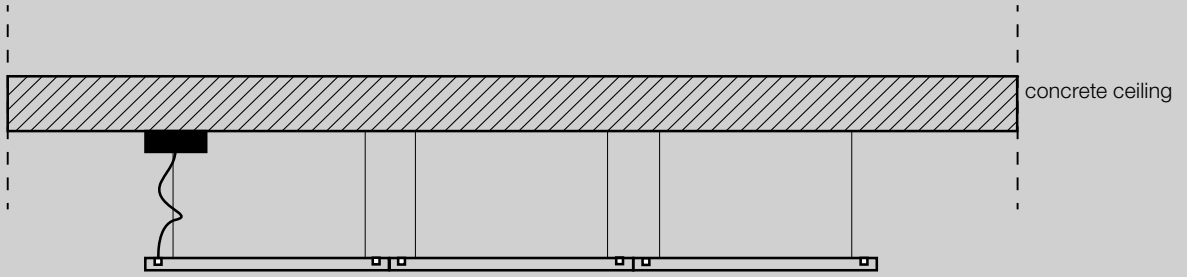


C

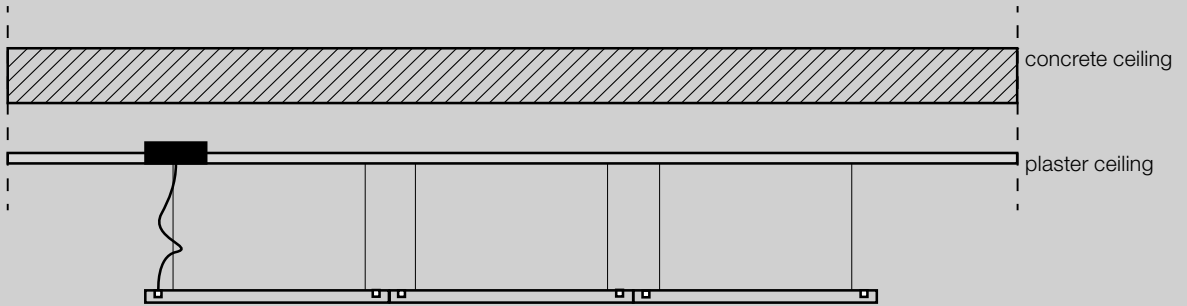


D

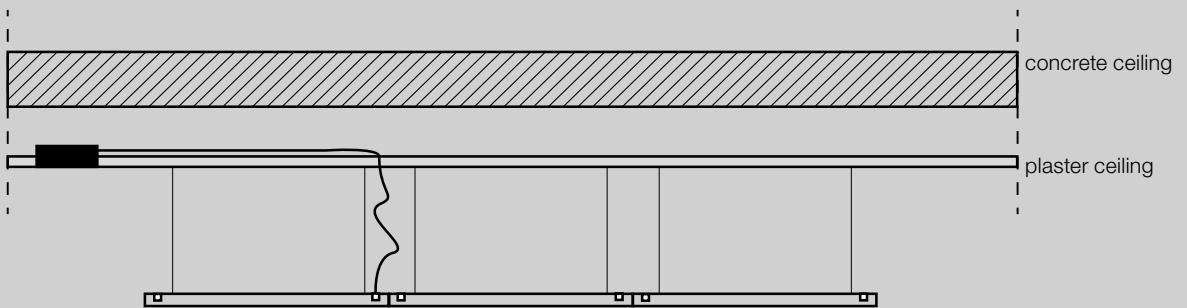


B

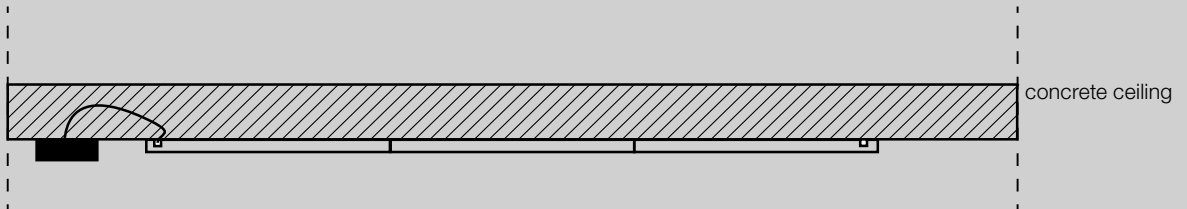

D

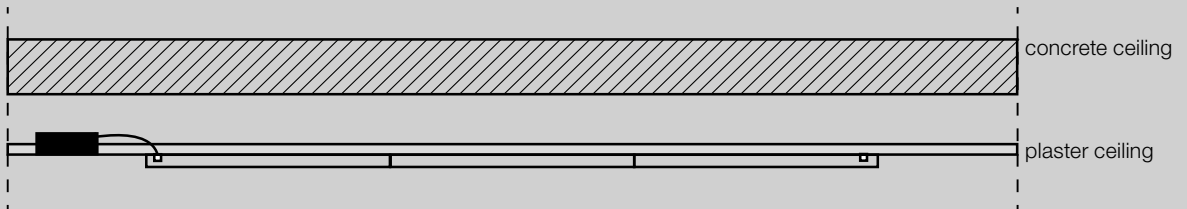

D

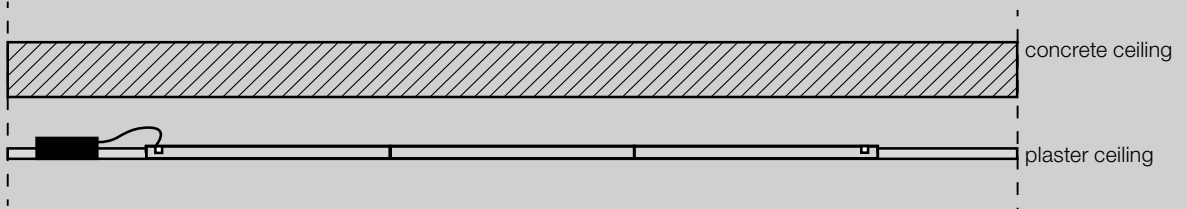





A.24 system









A.24 RECESSED MAGNETIC TRACK

White Black



01



04

IP20



LINEAR MODULES

Length


1176 mm

2352 mm


Code

AQ150. 01/04

AQ151. 01/04



Length x 56 mm



90° ANGLES

90° on same plane track angle modules

301 x 301 mm




90° on perpendicular planes track angle modules

276x276 mm

Code

AQ155. 01/04

AQ156. 01/04



X&T JOINTS

	Dimensions
X Joint	603 x 603 mm
T Joint	603 x 315 mm

Code

AQ138. 01/04

AQ100. 01/04



CURVED MODULES

(not magnetic)

Radius	Alpha
561 mm	60°
	90°

750 mm	45°
	90°





Code

AQ500. 01/04

AQ510. 01/04

AQ520. 01/04

AQ530. 01/04



Formwork (aluminum)

Length	Radius	Alpha
Curved	561 mm	60°
		90°
	750 mm	45°
		90°
End caps (2pcs)		

Code

AQ59000

AQ59100

AQ59200

AQ59300

AQ29400

Each linear, angle and curved element is provided with mechanical and electrical joints and installation accessories.
End caps have to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.

The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Accessories		Power supply Accessory	
	Code		Code
	Insulating spacer (1 pcs) use between modules powered by different power supplies	4pcs feed connectors (for powering multiple sections with a single power kit)	AQ90500
	End caps (2 pcs) used for linear modules, 90° angles and X&T joints	Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables)	AQ90600
	End caps (2 pcs) used for curved modules	Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables)	AQ90700
	Transition joint use between different typology modules (track-diffusing-sharping)	Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables)	AQ90800
		Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)	AQ90900
Power supply		Dimmable DALI	APP
	Undimmable	Code	Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16000	AQ16000APP

A.24 SUSPENSION MAGNETIC TRACK

White

Black

01

04

Fast delivery

Brushed Silver

Brushed Copper

Brushed Bronze

15

18

20



Delivery time on demand

*Uses 1 DALI address

IP20


LINEAR MODULES

Length					Code
1176 mm					AQ400. 01/04 15/18/20
2352 mm					AQ401. 01/04 15/18/20
Direct + indirect emission modules					Code
Length	W	CRI	Flux	CCT	
1176 mm*	14W	90	1693 lm	2700K	AQ406. 01/04 15/18/20
			1796 lm	3000K	AQ402. 01/04 15/18/20
				4000K	AQ403. 01/04 15/18/20
2352 mm*	29W	90	3386 lm	2700K	AQ407. 01/04 15/18/20
			3591 lm	3000K	AQ404. 01/04 15/18/20
				4000K	AQ405. 01/04 15/18/20






90° ANGLES

Code	
90° suspended track corner (on same plane)	AQ492.
301x301 mm	01/04
	15/18/20







X&T JOINTS

Dimensions		Code	
X Joint	603 x 603 mm	AQ139.	01/04
		15/18/20	
T Joint	603 x 315 mm	AQ101.	01/04
		15/18/20	

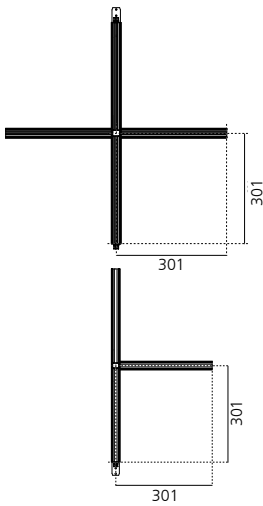





CURVED MODULES

(not magnetic)		Code	
Radius	Alpha	AQ700.	
561 mm	60°	15/18/20	
	90°	AQ710.	
750 mm	45°	15/18/20	
	90°	AQ720.	
		15/18/20	
		AQ730.	
		15/18/20	



Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa.

The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Accessories		Power supply Accessory	
	Code		Code
	Insulating spacer (1 pcs) between modules powered by different power supplies	4pcs feed connectors (for powering multiple sections with a single power kit)	AQ90500
	End cap (2 pcs) including 2 suspension cables 200H	Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables)	AQ90600
	Transition joint between different typology modules (track-diffusing-sharping)	Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables)	AQ90700
	Auxiliary suspension cable (1 pcs) to be used for S-configuration	Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables)	AQ90800
		Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)	AQ90900
Power supply		Undimmable	Dimmable DALI
		Code	APP
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 ☎ 396x195x112h		AQ158. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16000	AQ16000APP









A.24 CEILING MAGNETIC TRACK

White

Black

01

04

Fast delivery

Brushed Silver

Brushed Copper

Brushed Bronze

15

18


20

Delivery time on demand

IP20


LINEAR MODULES

Length	Code
1176 mm	AQ300. 01/04 15/18/20
2352 mm	AQ301. 01/04 15/18/20




90° ANGLES

	Code
90° on same plane track angle modules 301 x 301 mm	AQ392. 01/04 15/18/20
90° on perpendicular planes track angle modules 330 x 330 mm	AQ393. 01/04 15/18/20

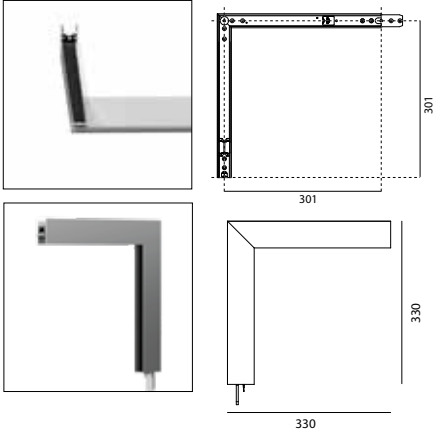


X&T JOINTS

	Dimensions	Code
X Joint	603 x 603 mm	AQ140. 01/04 15/18/20
T Joint	603 x 315 mm	AQ102. 01/04 15/18/20

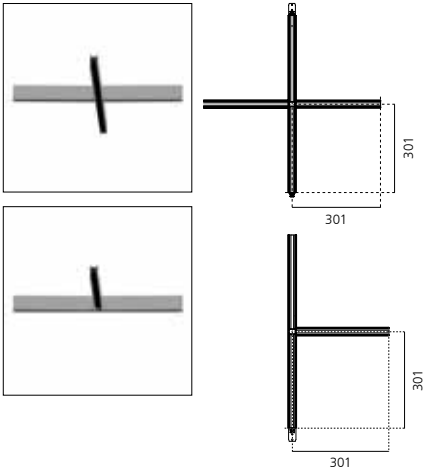

CURVED MODULES

not magnetic)		Code
Radius	Alpha	AQ600. 01/04 15/18/20
561 mm	60°	AQ610. 01/04 15/18/20
	90°	AQ620. 01/04 15/18/20
750 mm	45°	AQ630. 01/04 15/18/20
	90°	

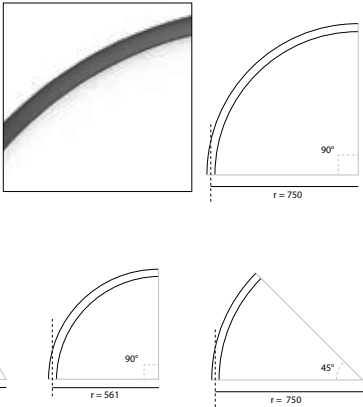

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm lenght or 2 for 2352 mm lenght.
End caps have to be ordered separately.

The APP driver can not be controlled by DALI dimming system and viceversa.
The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Accessories		Power supply Accessory	
	Code		Code
 Insulating spacer (1 pcs) use between modules powered by different power supplies	AQ391. 01/04 15/18/20	4pcs feed connectors (for powering multiple sections with a single power kit) Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables)	AQ90500
 End caps (2 pcs)	AQ390. 01/04 15/18/20	Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables)	AQ90600
 Cap for cable passage (1 pcs)	AQ395. 01/04 15/18/20	Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables)	AQ90700
 Transition joint use between different typology modules (track-diffusing-sharping)	AQ394. 01/04 15/18/20	Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)	AQ90800
			AQ90900
Power supply		Dimmable DALI	APP
	Code	Code	Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20  396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20  396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20  396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20  400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20  400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20  244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20  244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20  313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20  313x243x57,5h		AQ16000	AQ16000APP

VECTOR MAGNETIC TRACK


White  01 Fast delivery	Black  04	Brushed Silver  15	Brushed Copper  18	Brushed Bronze  20 Delivery time on demand	SP 	FL 	WF 	Delivery time on demand 2700K - 4000K	MacAdam 3SDCM *MacAdam 2SDCM CRI = 90	IP20 
--	---	--	--	---	---	---	---	--	---	---

VECTOR 30 MAGNETIC

				Dimmable DALI
W	Beam	Flux	CCT	Code
6,5 W	SP 12°	329 lm	2700K	AP811. 01/04 15/18/20
			3000K	AP801. 01/04 15/18/20
			4000K	AP851. 01/04 15/18/20
7 W	FL 16°	335 lm	2700K	AP812. 01/04 15/18/20
			3000K	AP802. 01/04 15/18/20
			4000K	AP852. 01/04 15/18/20
	WF 30°	292 lm	2700K	AP813. 01/04 15/18/20
			3000K	AP803. 01/04 15/18/20
			4000K	AP853. 01/04 15/18/20



Life L70 (6K) 36000h




VECTOR 40 MAGNETIC

				Dimmable DALI
W	Beam	Flux	CCT	Code
9 W	SP 14°	544 lm	2700K	AP011. 01/04 15/18/20
		541 lm	3000K	AP001. 01/04 15/18/20
		541 lm	4000K	AP051. 01/04 15/18/20
	*FL 21°	543 lm	2700K	AP012. 01/04 15/18/20
		584 lm	3000K	AP002. 01/04 15/18/20
		626 lm	4000K	AP052. 01/04 15/18/20
	*WF 28°	491 lm	2700K	AP013. 01/04 15/18/20
		529 lm	3000K	AP003. 01/04 15/18/20
		566 lm	4000K	AP053. 01/04 15/18/20



Life L70 (9K) 50000h



ADAPTER COLOR					
ARM COLOR					
HEAT-SINK COLOR					
BODY COLOR					
ANTIGLARE COLOR					
ACCESSORIES COLOR (visible ones)					

VECTOR MAGNETIC TRACK


White  01 Fast delivery	Black  04	Brushed Silver  15	Brushed Copper  18	Brushed Bronze  20	SP 	FL 	WF 	Delivery time on demand 2700K - 4000K	MacAdam 3SDCM CRI = 90	IP20 
--	---	--	--	--	---	---	---	--	---------------------------	---

VECTOR 55 MAGNETIC

				Dimmable DALI	
W	Beam	Flux	CCT	Code	
19 W	SP 15°	1677 lm	2700K	AP111. 01/04	
				15/18/20	
		1771 lm	3000K	AP101. 01/04	
				15/18/20	
		1915 lm	4000K	AP151. 01/04	
				15/18/20	
	FL 22°	1715 lm	2700K	AP112. 01/04	
				15/18/20	
		1811 lm	3000K	AP102. 01/04	
				15/18/20	
		1959 lm	4000K	AP152. 01/04	
				15/18/20	
	WF 31°	1779 lm	2700K	AP113. 01/04	
				15/18/20	
		1878 lm	3000K	AP103. 01/04	
				15/18/20	
		2032 lm	4000K	AP153. 01/04	
				15/18/20	



Life L70 (9K) 50000h




VECTOR 55 ZOOM MAGNETIC

				Dimmable DALI	
W	Beam	Flux	CCT	Code	
16 W	FL 22°-WF 31°	603 - 1039 lm	2700K	AP114. 01/04	
				15/18/20	
		637 - 1098 lm	3000K	AP104. 01/04	
				15/18/20	
		688 - 1187 lm	4000K	AP154. 01/04	
				15/18/20	



Life L70 (9K) 50000h



Accessoires		Vector 40	Vector 55
	Color	Code	Code
	●	AP90100	AP91100
		AP90200	AP91200
		AP90300	AP91300*
	●	AP90400	AP91400
	●		AP91500

* Cannot be used with brushed silver finishing (n.15 finishing)

VECTOR PENDANT SECURLOCK

White

Black

01

04

Fast delivery

Brushed Silver

Brushed Copper

Brushed Bronze

15

18

20

Delivery time on demand

SP

FL

WF

Delivery time on demand

2700K - 4000K

MacAdam 3SDCM


*MacAdam 2SDCM

CRI = 90

IP20

VECTOR 30 PENDANT SECURLOCK


				Dimmable DALI	
W	Beam	Flux	CCT	Code	
6,5 W	SP 12°	329 lm	2700K	AP411.	01/04 15/18/20
			3000K	AP401.	01/04 15/18/20
			4000K	AP451.	01/04 15/18/20
	FL 16°	335 lm	2700K	AP412.	01/04 15/18/20
			3000K	AP402.	01/04 15/18/20
			4000K	AP452.	01/04 15/18/20
7 W	WF 30°	292 lm	2700K	AP413.	01/04 15/18/20
			3000K	AP403.	01/04 15/18/20
			4000K	AP453.	01/04 15/18/20

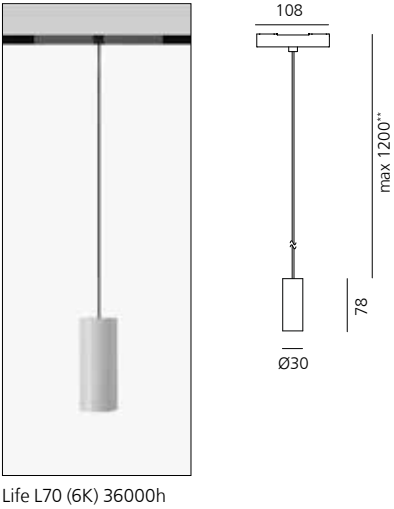

Life L70 (6K) 36000h

VECTOR 40 PENDANT SECURLOCK

				Dimmable DALI	
W	Beam	Flux	CCT	Code	
9 W	SP 14°	544 lm	2700K	AP211.	01/04 15/18/20
		541 lm	3000K	AP201.	01/04 15/18/20
		541 lm	4000K	AP251.	01/04 15/18/20
	*FL 21°	543 lm	2700K	AP212.	01/04 15/18/20
		584 lm	3000K	AP202.	01/04 15/18/20
		626 lm	4000K	AP252.	01/04 15/18/20
	*WF 28°	491 lm	2700K	AP213.	01/04 15/18/20
		529 lm	3000K	AP203.	01/04 15/18/20
		566 lm	4000K	AP253.	01/04 15/18/20

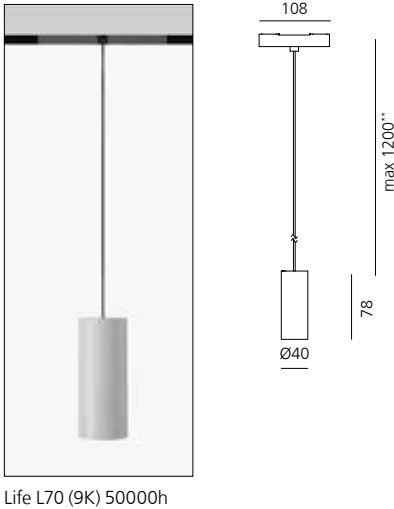

Life L70 (9K) 50000h

VECTOR PENDANT SECURLOCK

White
01
Fast delivery

Black
04

Brushed Silver
15
Delivery time on demand

Brushed Copper
18

Brushed Bronze
20

SP

FL

WF


Delivery time on demand
2700K - 4000K

MacAdam 3SDCM
CRI = 90

IP20

VECTOR 55 PENDANT SECURLOCK

				Dimmable DALI
W	Beam	Flux	CCT	Code
19 W	SP 15°	1677 lm	2700K	AP311. 01/04 15/18/20
		1771 lm	3000K	AP301. 01/04 15/18/20
		1915 lm	4000K	AP351. 01/04 15/18/20
	FL 22°	1715 lm	2700K	AP312. 01/04 15/18/20
		1811 lm	3000K	AP302. 01/04 15/18/20
		1959 lm	4000K	AP352. 01/04 15/18/20
	WF 31°	1779 lm	2700K	AP313. 01/04 15/18/20
		1878 lm	3000K	AP303. 01/04 15/18/20
		2032 lm	4000K	AP353. 01/04 15/18/20

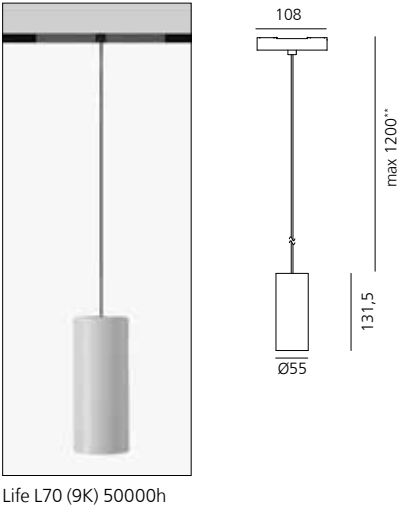

Life L70 (9K) 50000h



** No cuttable wire. Clips included to adjust the length.

A.24 WALL WASHER

White

Black

01

04

Fast delivery

Brushed Silver

Brushed Copper

Brushed Bronze

15

18

20

Delivery time on demand

MacAdam 3SDCM



Life L70 (6K) 50000h

CRI = 90

IP20

Length	W	Flux	CCT
600 mm	11W	1038 lm	2700K
		1070 lm	3000K
		1145 lm	4000K
1200 mm	21W	2076 lm	2700K
		2140 lm	3000K
		2290 lm	4000K

Code
WW101. 01/04 15/18/20
WW111. 01/04 15/18/20
WW121. 01/04 15/18/20
WW142. 01/04 15/18/20
WW152. 01/04 15/18/20
WW162. 01/04 15/18/20









A.24 RECESSED DIFFUSED EMISSION

White



01

*Uses 1 DALI address
** Uses 2 DALI addresses

MacAdam 3SDCM
Life L70 (17k)>102000h
CRI = 90

IP20



Formwork (aluminum)

Length	Radius	Alpha
Linear 1176 mm		
Linear 2352 mm		
90° angle on the same plane		
90° angle on perpendicular		
X joint		
T joint		
Curved	561 mm	60°
	750 mm	90°
		45°
		90°


End caps (2pcs)

Code

AQ29100
AQ29200
AQ29300
AQ29500
AQ00020
AQ00010
AQ59000
AQ59100
AQ59200
AQ59300
AQ29400



Length x 56 mm




LINEAR MODULES

Linear direct emission modules

Length	W	Flux ¹	CCT
1176 mm*	29W	3222 lm	2700K
		3418 lm	3000K
		3418 lm	4000K
2352 mm**	58W	6445 lm	2700K
		6836 lm	3000K
		6836 lm	4000K

Code

AQ27001
AQ20001
AQ20101
AQ27101
AQ20201
AQ20301






90° ANGLES

	W	Flux ¹	CCT
90° on same plane angle	14W	1611 lm	2700K
direct emission modules		1709 lm	3000K
301 x 301 mm*		1709 lm	4000K
90° on perpendicular	14W	1611 lm	2700K
plane angle direct		1709 lm	3000K
emission modules		1709 lm	4000K
330 x 330 mm*			

Code

AQ27201
AQ20401
AQ20501
AQ27301
AQ20701
AQ20801




X&T JOINTS

	W	Flux ¹	CCT
X Joint	29 W	3002 lm	2700K
		3184 lm	3000K
		3184 lm	4000K
T Joint	22 W	2286 lm	2700K
		2424 lm	3000K
		2424 lm	4000K

Code

AQ14701
AQ14801
AQ14901
AQ11601
AQ11701
AQ11801







CURVED MODULES

Curved direct emission modules

Radius	Alpha	W	Flux ¹	CCT
561 mm*	60°	14W	1421 lm	2700K
			1507 lm	3000K
			1507 lm	4000K
	90°	22W	2132 lm	2700K
			2261 lm	3000K
			2261 lm	4000K
750 mm*	45°	14W	1421 lm	2700K
			1507 lm	3000K
			1507 lm	4000K
	90°	29W	2842 lm	2700K
			3015 lm	3000K
			3015 lm	4000K

Code

AQ50701
AQ50101
AQ50201
AQ51701
AQ51101
AQ51201
AQ52701
AQ52101
AQ52201
AQ53701
AQ53101
AQ53201



¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules.
Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories.
End caps have to be ordered separately.

Opal diffusing screen has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Accessories		Power supply Accessory	
	Code		Code
 Insulating spacer (1 pcs) between modules powered by different power supplies	AQ20601	4pcs feed connectors (for powering multiple sections with a single power kit)	AQ90500
 End caps (2 pcs)	AQ25001	Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables)	AQ90600
 Transition joint use between different typology modules (track-diffusing- shaping)	AQ29001	Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables)	AQ90700
 Opal diffusing screen 10 m 25 m 50 m 1176 mm 2352 mm 3528 mm	AQ16200 AQ16300 AQ16400 AQ16500 AQ16600 AQ16700	Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables)	AQ90800
 Flexible opal diffusing screen 5 m 10 m 25 m 50 m	AQ90300 AQ90000 AQ90100 AQ90200	Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)	AQ90900
Power supply		Dimmable DALI	APP
	Undimmable Code	Code	Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 Ⓢ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI- Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 Ⓢ 244x68x38h (for dimmable version to be combined with "DALI- Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 Ⓢ 313x243x57,5h		AQ16000	AQ16000APP

A.24 SUSPENSION DIFFUSED EMISSION



White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	*Uses 1 DALI address ** Uses 2 DALI addresses *** Uses 3 DALI addresses	MacAdam 3SDCM Life L70 (17k)>102000h CRI = 90	IP20
------------------------------	-------------	---	----------------------	----------------------	---	---	------

LINEAR MODULES

Length	W	Flux ¹	CCT
1176 mm*	29W	3222 lm	2700K
		3418 lm	3000K
		3418 lm	4000K
2352 mm**	58W	6445 lm	2700K
		6836 lm	3000K
		6836 lm	4000K

Direct + indirect emission modules			
Length	W	Flux ¹	CCT
1176 mm**	29W direct 14W indirect	3222 lm direct 1694 lm indirect	2700K
		3418 lm direct	3000K
		1796 lm indirect	4000K
		3418 lm direct	4000K
		1796 lm indirect	4000K
2352 mm***	58W direct 29W indirect	6445 lm direct 3386 lm indirect	2700K
		6836 lm direct	3000K
		3591 lm indirect	4000K
		6836 lm direct	4000K
		3591 lm indirect	4000K



Code
AQ416. 01/04 15/18/20
AQ410. 01/04 15/18/20
AQ411. 01/04 15/18/20
AQ417. 01/04 15/18/20
AQ412. 01/04 15/18/20
AQ413. 01/04 15/18/20



90° ANGLES

90° angle direct emission modules			
	W	Flux ¹	CCT
90° on same plane angle modules	14W	1611 lm	2700K
301 x 301 mm*		1709 lm	3000K
		1709 lm	4000K




Code
AQ418. 01/04 15/18/20
AQ414. 01/04 15/18/20
AQ415. 01/04 15/18/20



X&T JOINTS

X & T Joints			
	W	Flux ¹	CCT
X Joint	29 W	3002 lm	2700K
		3184 lm	3000K
		3184 lm	4000K
T Joint	22 W	2286 lm	2700K
		2424 lm	3000K
		2424 lm	4000K

Code
AQ144. 01/04 15/18/20
AQ145. 01/04 15/18/20
AQ146. 01/04 15/18/20
AQ113. 01/04 15/18/20
AQ114. 01/04 15/18/20
AQ115. 01/04 15/18/20

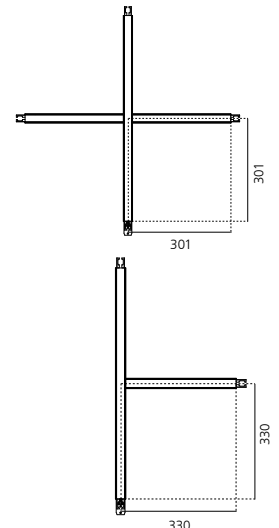





¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories.
1 suspension cable is also included.
End caps have to be ordered separately.
Opal diffusing screen has to be ordered separately.

The APP driver can not be controlled by DALI dimming system and viceversa.

CURVED MODULES

Radius	Alpha	W	Flux ¹	CCT	Code
561 mm*	60°	14W	1421 lm	2700K	AQ707. 01/04 15/18/20
			1507 lm	3000K	AQ701. 01/04 15/18/20
			1507 lm	4000K	AQ702. 01/04 15/18/20
	90°	22W	2132 lm	2700K	AQ717. 01/04 15/18/20
			2261 lm	3000K	AQ711. 01/04 15/18/20
			2261 lm	4000K	AQ712. 01/04 15/18/20
750 mm*	45°	14W	1421 lm	2700K	AQ727. 01/04 15/18/20
			1507 lm	3000K	AQ721. 01/04 15/18/20
			1507 lm	4000K	AQ722. 01/04 15/18/20
	90°	29W	2842 lm	2700K	AQ737. 01/04 15/18/20
			3015 lm	3000K	AQ731. 01/04 15/18/20
			3015 lm	4000K	AQ732. 01/04 15/18/20



¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

A.24 SUSPENSION DIFFUSED EMISSION

OPAL AND FLEXIBLE OPAL DIFFUSER SCREEN COMPARISON

LINEAR MODULES

Emission		White body + diffuser cod. AQ16...	White body + flexible diffuser cod. AQ90...	Black body + diffuser cod. AQ16...	Black body + flexible diffuser cod. AQ90...
1176 mm					
2700K	Direct	3222 lm	2842 lm	2680 lm	2232 lm
	Direct + Indirect	4916 lm	4535 lm	4066 lm	3617 lm
3000K	Direct	3418 lm	3015 lm	2843 lm	2367 lm
	Direct + Indirect	5214 lm	4810 lm	4312 lm	3837 lm
4000K	Direct	3418 lm	3015 lm	2843 lm	2367 lm
	Direct + Indirect	5214 lm	4811 lm	4313 lm	3837 lm
2352 mm					
2700K	Direct	6445 lm	5685 lm	5361 lm	4464 lm
	Direct + Indirect	9831 lm	9071 lm	8132 lm	7235 lm
3000K	Direct	6836 lm	6029 lm	5685 lm	4734 lm
	Direct + Indirect	10427 lm	9621 lm	8624 lm	7673 lm
4000K	Direct	6836 lm	6029 lm	5685 lm	4734 lm
	Direct + Indirect	10427 lm	9621 lm	8624 lm	7673 lm

ANGULAR MODULES

Emission		White body + diffuser cod. AQ16...	White body + flexible diffuser cod. AQ90...	Black body + diffuser cod. AQ16...	Black body + flexible diffuser cod. AQ90...
90° Angle					
2700K	Direct	1611 lm	1421 lm	1340 lm	1116 lm
3000K	Direct	1709 lm	1507 lm	1421 lm	1184 lm
4000K	Direct	1709 lm	1507 lm	1421 lm	1184 lm

FLEXIBLE OPAL DIFFUSER SCREEN

CURVED MODULES 561 mm

Emission		White body + flexible diffuser cod. AQ90...	Black body + flexible diffuser cod. AQ90...
60°			
2700K	Direct	1421 lm	1116 lm
3000K	Direct	1507 lm	1184 lm
4000K	Direct	1507 lm	1184 lm
90°			
2700K	Direct	2132 lm	1674 lm
3000K	Direct	2261 lm	1775 lm
4000K	Direct	2261 lm	1775 lm

CURVED MODULES 750 mm

Emission		White body + flexible diffuser cod. AQ90...	Black body + flexible diffuser cod. AQ90...
45°			
2700K	Direct	1421 lm	1116 lm
3000K	Direct	1507 lm	1184 lm
4000K	Direct	1507 lm	1184 lm
90°			
2700K	Direct	2842 lm	2232 lm
3000K	Direct	3015 lm	2367 lm
4000K	Direct	3015 lm	2367 lm

Flux for Silver body is the same of White body.
Flux for Copper and Bronze body is the same of Black body.

A.24 SUSPENSION DIFFUSED EMISSION

White

Black

01

04

Fast delivery

Brushed Silver

Brushed Copper

Brushed Bronze

15

18

20

Delivery time on demand

*Uses 1 DALI address

** Uses 2 DALI addresses

*** Uses 3 DALI addresses

IP20

Accessories		Power supply Accessory	
	Insulating spacer (1 pcs) between modules powered by different power supplies	Code AQ452. 01/04 15/18/20	Code AQ90500
	End caps (2 pcs) including 2 suspension cables 200H	AQ451. 01/04 15/18/20	4pcs feed connectors (for powering multiple sections with a single power kit) Power cable, 2x0.75 + 2x0.35, mm², white, 10 m AQ90600 (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², white, 50 m AQ90700 (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², black, 10 m AQ90800 (to realize customized power cables) Power cable, 2x0.75 + 2x0.35, mm², black, 50 m AQ90900 (to realize customized power cables)
	Transition joint use between different typology modules (track-diffusing-sharping)	AQ494. 01/04 15/18/20	
	Opal diffusing screen 10 m 25 m 50 m 1176 mm 2352 mm 3528 mm	AQ16200 AQ16300 AQ16400 AQ16500 AQ16600 AQ16700	
	Flexible opal diffusing screen 5 m 10 m 25 m 50 m	AQ90300 AQ90000 AQ90100 AQ90200	
	Auxiliary suspension cable (1 pcs) to be used for S-configuration	AQ49500	

Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately.

The APP driver can not be controlled by DALI dimming system and viceversa. The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.


Power supply	Undimmable Code	Dimmable DALI Code	APP Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16000	AQ16000APP

A.24 CEILING - WALL DIFFUSED EMISSION

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	*Uses 1 DALI address ** Uses 2 DALI addresses	MacAdam 3SDCM Life L70 (17k)>102000h CRI = 90	IP20 
------------------------------	-------------	---	----------------------	----------------------	--	---	---


LINEAR MODULES

Length	W	Flux ¹	CCT	Code
1176 mm*	29W	3222 lm	2700K	AQ370. 01/04 15/18/20
		3418 lm	3000K	AQ310. 01/04 15/18/20
		3418 lm	4000K	AQ311. 01/04 15/18/20
2352 mm**	58W	6445 lm	2700K	AQ371. 01/04 15/18/20
		6836 lm	3000K	AQ312. 01/04 15/18/20
		6836 lm	4000K	AQ313. 01/04 15/18/20





90° ANGLES

	W	Flux ¹	CCT	Code
90° on same plane angle modules 301 x 301 mm*	14W	1611 lm	2700K	AQ372. 01/04 15/18/20
		1709 lm	3000K	AQ314. 01/04 15/18/20
		1709 lm	4000K	AQ315. 01/04 15/18/20






	W	Flux ¹	CCT	Code
90° on perpendicular planes angle modules 330 x 330 mm*	14W	1611 lm	2700K	AQ373. 01/04 15/18/20
		1709 lm	3000K	AQ316. 01/04 15/18/20
		1709 lm	4000K	AQ317. 01/04 15/18/20



X&T JOINTS

	W	Flux ¹	CCT	Code
X Joint	29 W	3002 lm	2700K	AQ147. 01/04 15/18/20
		3184 lm	3000K	AQ148. 01/04 15/18/20
		3184 lm	4000K	AQ149. 01/04 15/18/20
T Joint	22 W	2286 lm	2700K	AQ116. 01/04 15/18/20
		2424 lm	3000K	AQ117. 01/04 15/18/20
		2424 lm	4000K	AQ118. 01/04 15/18/20




¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm lenght. 2 for 2352 mm lenght.
End caps have to be ordered separately.

Opal diffusing screen has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.

CURVED MODULES

Radius	Alpha	W	Flux ¹	CCT	Code
561 mm*	60°	14W	1421 lm	2700K	AQ607. 01/04 15/18/20
			1507 lm	3000K	AQ601. 01/04 15/18/20
			1507 lm	4000K	AQ602. 01/04 15/18/20
	90°	22W	2132 lm	2700K	AQ617. 01/04 15/18/20
			2261 lm	3000K	AQ611. 01/04 15/18/20
			2261 lm	4000K	AQ612. 01/04 15/18/20
750 mm*	45°	14W	1421 lm	2700K	AQ627. 01/04 15/18/20
			1507 lm	3000K	AQ621. 01/04 15/18/20
			1507 lm	4000K	AQ622. 01/04 15/18/20
	90°	29W	2842 lm	2700K	AQ637. 01/04 15/18/20
			3015 lm	3000K	AQ631. 01/04 15/18/20
			3015 lm	4000K	AQ632. 01/04 15/18/20

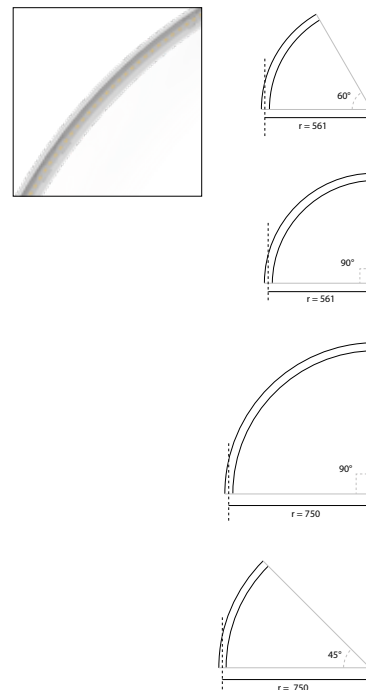

¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

A.24 CEILING - WALL DIFFUSED EMISSION

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze
				
01	04	15	18	20
Fast delivery		Delivery time on demand		

Accessories		Power supply Accessory	
	Insulating spacer (1 pc) between modules powered by different power supplies	Code AQ351. 01/04 15/18/20	Code AQ90500
	End cap (2 pcs)	AQ350. 01/04 15/18/20	4pcs feed connectors (for powering multiple sections with a single power kit) Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables) AQ90600 Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables) AQ90700 Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables) AQ90800 Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables) AQ90900
	Cap for cable passage (1 pcs)	AQ353. 01/04 15/18/20	
	Transition cap track - diffusing track - sharpening diffusing - sharpening	AQ394. 01/04 15/18/20	
	Opal diffusing screen 10 m 25 m 50 m 1176 mm 2352 mm 3528 mm Flexible opal diffusing screen 5 m 10 m 25 m 50 m	AQ16200 AQ16300 AQ16400 AQ16500 AQ16600 AQ16700 AQ90300 AQ90000 AQ90100 AQ90200	


Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
Bracket for fixing to ceiling is included: 1 for 1176 mm lenght. 2 for 2352 mm lenght.
End caps have to be ordered separately.

Opal diffusing screen has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.
The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Power supply	Undimmable Code	Dimmable DALI Code	APP Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16000	AQ16000APP

A.24

sharping structure

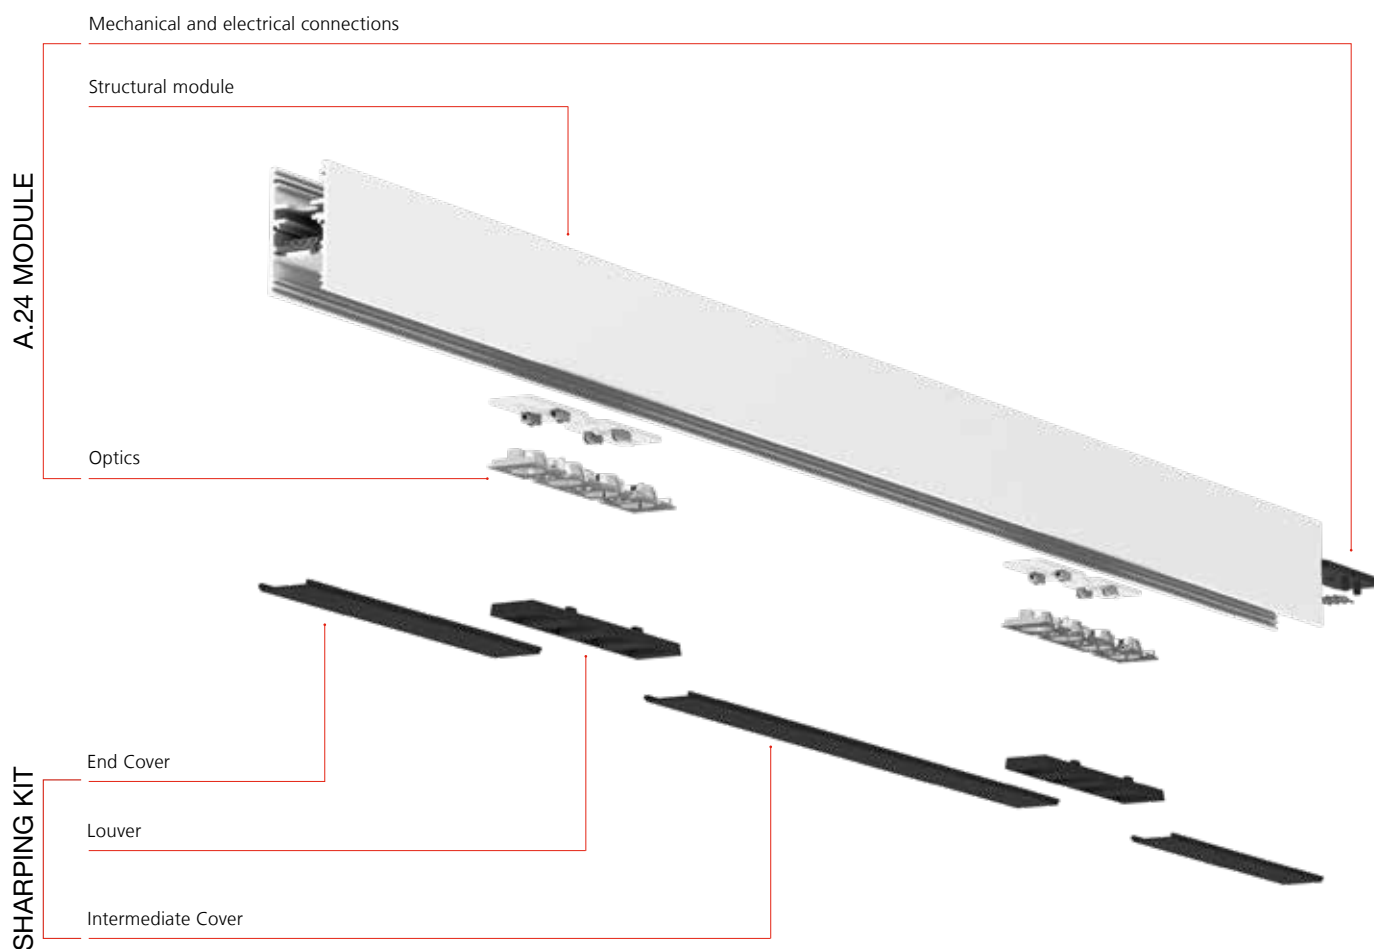




A.24 RECESSED SHARPING EMISSION

White	Black	FL	XF	*Uses 1 DALI address ** Uses 2 DALI addresses	MacAdam 2SDCM Life L90 (20K) 118000h CRI = 90	IP20
						
01	04					

Formwork (aluminum)		
Length	Radius	Alpha
Linear 1176 mm		
Linear 2352 mm		
90° angle on the same plane		
X joint		
T joint		
Curved	561 mm	60°
	750 mm	90°
		45°
		90°
End caps (2pcs)		


Code
AQ29100
AQ29200
AQ29300
AQ00020
AQ00010
AQ59000
AQ59100
AQ59200
AQ59300
AQ29400

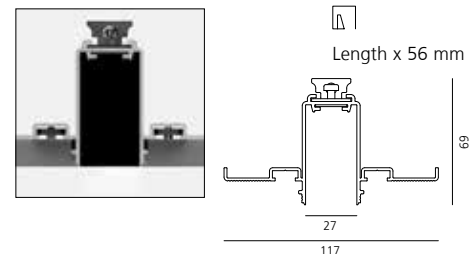

LINEAR MODULES

Length	W	Beam	Flux	CCT
1176 mm*	22W	FL 24°	1617 lm	2700K
			1628 lm	3000K
			1742 lm	4000K
		XF 62°	1718 lm	2700K
			1731 lm	3000K
			1852 lm	4000K
2352 mm**	45W	FL 24°	3233 lm	2700K
			3256 lm	3000K
			3485 lm	4000K
		XF 62°	3437 lm	2700K
			3461 lm	3000K
			3704 lm	4000K


Code
AQ214. 01/04
AQ210. 01/04
AQ211. 01/04
AQ234. 01/04
AQ230. 01/04
AQ231. 01/04
AQ215. 01/04
AQ212. 01/04
AQ213. 01/04
AQ235. 01/04
AQ232. 01/04
AQ233. 01/04



90° ANGLES

joining (not lit)
90° recessed corner (on same plane)
301x301 mm


Code
AQ240. 01/04

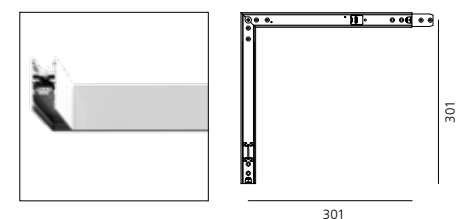

X&T JOINTS

	W	Beam	Flux	CCT
X Joint	11 W	FL 26°	808 lm	2700K
			808 lm	3000K
			866 lm	4000K
		XF 64°	859 lm	2700K
			859 lm	3000K
			921 lm	4000K
T Joint	11 W	FL 26°	808 lm	2700K
			808 lm	3000K
			866 lm	4000K
		XF64°	859 lm	2700K
			859 lm	3000K
			921 lm	4000K

Code
AQ008. 01/04
AQ009. 01/04
AQ010. 01/04
AQ011. 01/04
AQ012. 01/04
AQ013. 01/04
AQ132. 01/04
AQ133. 01/04
AQ134. 01/04
AQ135. 01/04
AQ136. 01/04
AQ137. 01/04

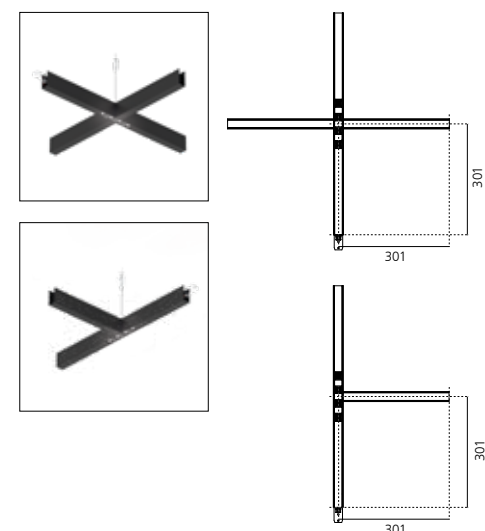


Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules.
Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories.
End caps have to be ordered separately.

Sharping kit (louvers and covers) has to be ordered separately.
The APP driver can not be controlled by DALI dimming system and viceversa.

CURVED MODULES

Radius	Alpha	W	Beam	Flux	CCT	Code
561 mm*	60°	11W	FL 24°	808 lm	2700K	AQ508. 01/04
				814 lm	3000K	AQ503. 01/04
				873 lm	4000K	AQ505. 01/04
			XF 62°	859 lm	2700K	AQ509. 01/04
				865 lm	3000K	AQ504. 01/04
				928 lm	4000K	AQ506. 01/04
	90°	11W	FL 24°	808 lm	2700K	AQ518. 01/04
				814 lm	3000K	AQ513. 01/04
				873 lm	4000K	AQ515. 01/04
			XF 62°	859 lm	2700K	AQ519. 01/04
				865 lm	3000K	AQ514. 01/04
				928 lm	4000K	AQ516. 01/04
750 mm*	45°	11W	FL 24°	859 lm	2700K	AQ528. 01/04
				814 lm	3000K	AQ523. 01/04
				873 lm	4000K	AQ525. 01/04
			XF 62°	859 lm	2700K	AQ529. 01/04
				865 lm	3000K	AQ524. 01/04
				928 lm	4000K	AQ526. 01/04
	90°	22W	FL 24°	1616 lm	2700K	AQ538. 01/04
				1628 lm	3000K	AQ533. 01/04
				1742 lm	4000K	AQ535. 01/04
			XF 62°	1718 lm	2700K	AQ539. 01/04
				1731 lm	3000K	AQ534. 01/04
				1855 lm	4000K	AQ536. 01/04

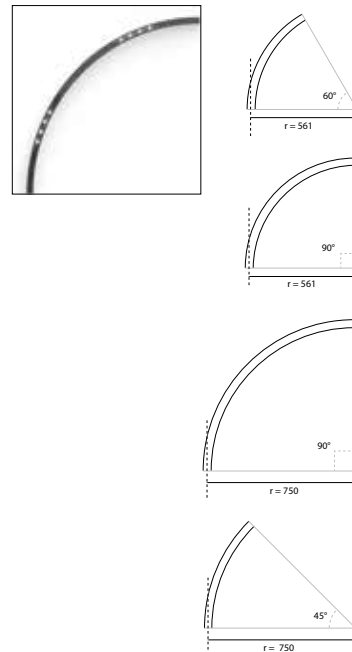


A.24 RECESSED SHARPING EMISSION

White

Black

01

04

Accessories		Power supply accessory	
	Code		Code
	Insulating spacer (1 pc) between modules powered by different power supplies	AQ206. 01/04	AQ90500
	End caps (2 pcs)	AQ250. 01/04	
	Transition joint use between different typology modules (track-diffusing-sharping)	AQ290. 01/04	
	Louwer for linear modules Sharping kit L=1176 mm (2 louvers - 1 intermediate cover - 2 end covers)	AQ260. 01/04	
	Sharping kit L=2352 mm (4 louvers - 3 intermediate cover - 2 end covers)	AQ261. 01/04	
	90° angle cover (2 pcs)	AQ262. 01/04	
	X joint (1 louver + 4 cover)	AQ015. 01/04	
	T joint (1 louver + 3 cover)	AQ014. 01/04	
	Louwer for curved modules R=561 mm / R=750 mm	AQ911. 01/04	
	R=561 mm 60° order 1 pc 90° order 1 pc		
	R=750 mm 45° order 1 pc 90° order 2 pcs		
	Flexible cover 2 m	AQ921. 01/04	
	Flexible cover 10 m	AQ920. 01/04	

Each formwork module is provided with a mechanical joint to connect two recessed coplanar formwork modules. Each module, angle and curved modules are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately.

Sharping kit (louvers and covers) has to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa. The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.


Power supply	Undimmable Code	Dimmable DALI Code	APP Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16000	AQ16000APP

A.24 SUSPENSION SHARPING EMISSION


White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	FL	XF	*Uses 1 DALI address ** Uses 2 DALI addresses *** Uses 3 DALI addresses	MacAdam 2SDCM Life L90 (20K) 118000h CRI = 90	IP20
									
01	04	15	18	20					
Fast delivery		Delivery time on demand							

LINEAR MODULES

Length	W	Beam	Flux	CCT	Code
1176 mm*	22W	FL 24°	1617 lm	2700K	AQ424. 01/04 15/18/20
			1628 lm	3000K	AQ420. 01/04 15/18/20
			1742 lm	4000K	AQ421. 01/04 15/18/20
		XF 62°	1694 lm	2700K	AQ444. 01/04 15/18/20
			1731 lm	3000K	AQ440. 01/04 15/18/20
			1852 lm	4000K	AQ441. 01/04 15/18/20
		FL 24°	3233 lm	2700K	AQ425. 01/04 15/18/20
			3256 lm	3000K	AQ422. 01/04 15/18/20
			3485 lm	4000K	AQ423. 01/04 15/18/20
2352 mm**	45W	XF 62°	3437 lm	2700K	AQ445. 01/04 15/18/20
			3461 lm	3000K	AQ442. 01/04 15/18/20
			3704 lm	4000K	AQ443. 01/04 15/18/20



Direct + indirect emission modules					Code
Length	W	Beam	Flux	CCT	
1176 mm**	22W direct 14W indirect	FL 24°	1617 lm direct	2700K	AQ482. 01/04 15/18/20
			1693 lm indirect		
			1628 lm direct	3000K	AQ470. 01/04 15/18/20
		XF 62°	1796 lm indirect		
			1742 lm direct	4000K	AQ471. 01/04 15/18/20
			1796 lm indirect		
	45W indirect 29W indirect	FL 24°	1718 lm direct	2700K	AQ486. 01/04 15/18/20
			1693 lm indirect		
			1731 lm direct	3000K	AQ478. 01/04 15/18/20
		XF 62°	1796 lm indirect		
			1852 lm direct	4000K	AQ479. 01/04 15/18/20
			1796 lm indirect		
2352 mm***	45W indirect 29W indirect	FL 24°	3056 lm direct	2700K	AQ483. 01/04 15/18/20
			3233 lm indirect		
			3233 lm direct	3000K	AQ472. 01/04 15/18/20
		XF 62°	3586 lm indirect		
			3485 lm direct	4000K	AQ473. 01/04 15/18/20
			3591 lm indirect		
	45W indirect 29W indirect	FL 24°	3437 lm direct	2700K	AQ487. 01/04 15/18/20
			3386 lm indirect		
			3461 lm direct	3000K	AQ480. 01/04 15/18/20
		XF 62°	3591 lm indirect		
			3704 lm direct	4000K	AQ481. 01/04 15/18/20
			3591 lm indirect		





90° ANGLES

joining (not lit)

90° suspension corner (on same plane)
301x301 mm




Code
AQ450. 01/04 15/18/20



Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
 1 suspension cable is also included.
 End caps have to be ordered separately.
 Sharping kit (louvers and covers) has to be ordered separately.

X&T JOINTS

X & T Joints					Code	
	W	Beam	Flux	CCT		
X Joint	11 W	FL 26°	808 lm	2700K	AQ002.	01/04
						15/18/20
			808 lm	3000K	AQ003.	01/04
						15/18/20
			866 lm	4000K	AQ004.	01/04
						15/18/20
		XF 64°	859 lm	2700K	AQ005.	01/04
						15/18/20
			859 lm	3000K	AQ006.	01/04
T Joint	11 W	FL 26°	808 lm	2700K	AQ007.	01/04
						15/18/20
			808 lm	3000K	AQ126.	01/04
						15/18/20
			866 lm	4000K	AQ127.	01/04
						15/18/20
		XF64°	859 lm	2700K	AQ128.	01/04
						15/18/20
			859 lm	3000K	AQ129.	01/04
						15/18/20
			921 lm	4000K	AQ130.	01/04
						15/18/20
					AQ131.	01/04
						15/18/20
						15/18/20







A.24 SUSPENSION SHARPING EMISSION

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze	FL	XF	*Uses 1 DALI address ** Uses 2 DALI addresses *** Uses 3 DALI addresses	MacAdam 2SDCM Life L90 (20K) 118000h CRI = 90	IP20
									
01	04	15	18	20					
Fast delivery		Delivery time on demand							





CURVED MODULES

Curved direct emission modules

Radius	Alpha	W	Beam	Flux	CCT
561 mm*	60°	11W	FL 24°	808 lm	2700K
				814 lm	3000K
				873 lm	4000K
			XF 62°	859 lm	2700K
				865 lm	3000K
				928 lm	4000K
	90°	11W	FL 24°	808 lm	2700K
				814 lm	3000K
				873 lm	4000K
			XF 62°	859 lm	2700K
				865 lm	3000K
				928 lm	4000K
750 mm*	45°	11W	FL 24°	808 lm	2700K
				814 lm	3000K
				873 lm	4000K
			XF 62°	859 lm	2700K
				865 lm	3000K
				928 lm	4000K
	90°	22W	FL 24°	1617 lm	2700K
				1628 lm	3000K
				1745 lm	4000K
			XF 62°	1718 lm	2700K
				1731 lm	3000K
				1855 lm	4000K

Code

AQ708. 01/04
15/18/20
AQ703. 01/04
15/18/20
AQ705. 01/04
15/18/20
AQ709. 01/04
15/18/20
AQ704. 01/04
15/18/20
AQ706. 01/04
15/18/20
AQ718. 01/04
15/18/20
AQ713. 01/04
15/18/20
AQ715. 01/04
15/18/20
AQ719. 01/04
15/18/20
AQ714. 01/04
15/18/20
AQ716. 01/04
15/18/20
AQ728. 01/04
15/18/20
AQ723. 01/04
15/18/20
AQ725. 01/04
15/18/20
AQ729. 01/04
15/18/20
AQ724. 01/04
15/18/20
AQ726. 01/04
15/18/20
AQ738. 01/04
15/18/20
AQ733. 01/04
15/18/20
AQ735. 01/04
15/18/20
AQ739. 01/04
15/18/20
AQ734. 01/04
15/18/20
AQ736. 01/04
15/18/20



Power supply Accessory

4pcs feed connectors

(for powering multiple sections with a single power kit)

Power cable, 2x0.75 + 2x0.35, mm², white, 10 m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², white, 50 m
(to realize customized power cables)

Power cable, 2x0.75 + 2x0.35, mm², black, 10 m
(to realize customized power cables)


Power cable, 2x0.75 + 2x0.35, mm², black, 50 m
(to realize customized power cables)

Code

AQ90500
AQ90600
AQ90700
AQ90800
AQ90900

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.
1 suspension cable is also included.
End caps have to be ordered separately.
Sharping kit (louvers and covers) has to be ordered separately.

The APP driver can not be controlled by DALI dimming system and viceversa.
The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Accessories					
	Insulating spacer (1 pcs) between modules powered by different power supplies	Code AQ453. 01/04 15/18/20		Louvers for linear modules Sharpening kit L=1176 mm (2 louvers - 1 intermediate cover - 2 end covers) Sharpening kit L=2352 mm (4 louvers - 3 intermediate cover - 2 end covers) X joint (1 louver + 4 cover) T joint (1 louver + 3 cover) 90° angle cover (2 pcs)	Code AQ260. 01/04 AQ261. 01/04 AQ015. 01/04 AQ014. 01/04 AQ262. 01/04
	End caps (2 pcs) including 2 suspension cables 200H	AQ451. 01/04 15/18/20			
	Transition cap track - diffusing track - sharpening diffusing - sharpening	AQ494. 01/04 15/18/20			
	Auxiliary suspension cable (1 pcs) to be used for S-configuration	AQ49500		Louvers for curved modules R=561 mm / R=750 mm R=561 mm 60° order 1 pc 90° order 1 pc R=750 mm 45° order 1 pc 90° order 2 pcs Flexible cover 2 m Flexible cover 10 m	AQ911. 01/04 AQ921. 01/04 AQ920. 01/04
Power supply		Undimmable	Dimmable DALI	APP	
		Code	Code	Code	
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 ☎ 396x195x112h		AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP	
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 ☎ 396x195x112h		AQ15901	AQ16901	AQ16901APP	
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 396x195x112h		AQ17801	AQ16801	AQ16801APP	
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h		AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP	
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h		AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP	
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")		AQ18000			
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")		AQ18100			
DALI to DALI-Selv Interface 103x67x21h			DV1061		
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h			AQ16800	AQ16800APP	
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h			AQ16000	AQ16000APP	

A.24 CEILING SHARPING EMISSION

White

Black

01

04

Fast delivery

Brushed Silver

Brushed Copper

Brushed Bronze

15

18

20

Delivery time on demand

FL

XF

*Uses 1 DALI address

** Uses 2 DALI addresses

MacAdam 2SDCM


Life L90 (20K) 118000h

CRI = 90

IP20


LINEAR MODULES

Length	W	CRI	Beam	Flux	CCT	Code		
1176 mm*	22W	90	FL 24°	1617 lm	2700K	AQ324. 01/04 15/18/20		
				1628 lm	3000K	AQ320. 01/04 15/18/20		
				1742 lm	4000K	AQ321. 01/04 15/18/20		
			XF 62°	1718 lm	2700K	AQ344. 01/04 15/18/20		
				1731 lm	3000K	AQ340. 01/04 15/18/20		
				1852 lm	4000K	AQ341. 01/04 15/18/20		
			2352 mm**	45W	FL 24°	3233 lm	2700K	AQ325. 01/04 15/18/20
						3256 lm	3000K	AQ322. 01/04 15/18/20
						3485 lm	4000K	AQ323. 01/04 15/18/20
XF 62°	3437 lm	2700K			AQ345. 01/04 15/18/20			
	3461 lm	3000K			AQ342. 01/04 15/18/20			
	3704 lm	4000K			AQ343. 01/04 15/18/20			

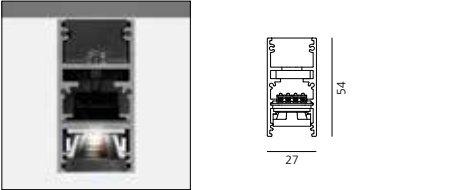


90° ANGLES

Joining (not lit)	Code
90° ceiling corner (on same plane)	AQ360. 01/04
301x301mm	15/18/20

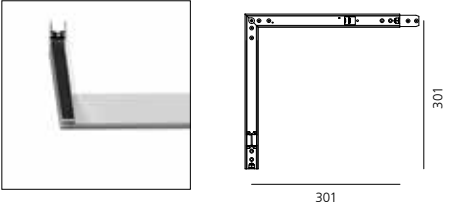

X&T JOINTS

	W	Beam	Flux	CCT	Code
X Joint	11 W	FL 26°	808 lm	2700K	AQ008. 01/04
					15/18/20
			808 lm	3000K	AQ009. 01/04
		XF 64°	866 lm	4000K	15/18/20
					AQ010. 01/04
					15/18/20
			859 lm	2700K	AQ011. 01/04
					15/18/20
			859 lm	3000K	AQ012. 01/04
T Joint	11 W	FL 26°	921 lm	4000K	15/18/20
					AQ013. 01/04
					15/18/20
		XF64°	808 lm	2700K	AQ132. 01/04
					15/18/20
			808 lm	3000K	AQ133. 01/04
					15/18/20
			866 lm	4000K	AQ134. 01/04
					15/18/20
			859 lm	2700K	AQ135. 01/04
					15/18/20
			859 lm	3000K	AQ136. 01/04
					15/18/20
			921 lm	4000K	AQ137. 01/04
					15/18/20

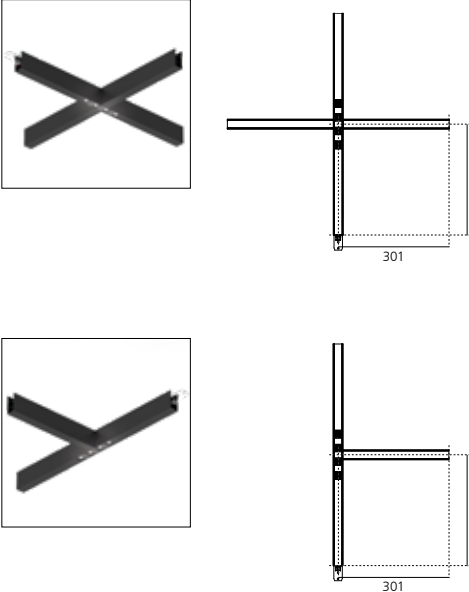

A.24 CEILING SHARPING EMISSION

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories.


Bracket for fixing to ceiling is included: 1 for 1176 mm lenght - 2 for 2352 mm lenght.

End caps have to be ordered separately.

Sharping kit (louvers and covers) has to be ordered separately.

CURVED MODULES

Radius	Alpha	W	CRI	Beam	Flux	CCT	Code
561 mm*	60°	11W	90	FL 24°	808 lm	2700K	AQ608.01/04
							15/18/20
					814 lm	3000K	AQ603.01/04
					873 lm	4000K	AQ605.01/04
				XF 62°	859 lm	2700K	AQ609.01/04
					865 lm	3000K	AQ604.01/04
					928 lm	4000K	AQ606.01/04
	90°	11W	90	FL 24°	808 lm	2700K	AQ618.01/04
					814 lm	3000K	AQ613.01/04
					873 lm	4000K	AQ615.01/04
				XF 62°	859 lm	2700K	AQ619.01/04
					865 lm	3000K	AQ614.01/04
					928 lm	4000K	AQ616.01/04
750 mm*	45°	11W	90	FL 24°	808 lm	2700K	AQ628.01/04
					814 lm	3000K	AQ623.01/04
					873 lm	4000K	AQ625.01/04
				XF 62°	859 lm	2700K	AQ629.01/04
					865 lm	3000K	AQ624.01/04
					928 lm	4000K	AQ626.01/04
	90°	22W	90	FL 24°	1617 lm	2700K	AQ638.01/04
					1628 lm	3000K	AQ633.01/04
					1745 lm	4000K	AQ635.01/04
				XF 62°	1718 lm	2700K	AQ639.01/04
					1731 lm	3000K	AQ634.01/04
					1855 lm	4000K	AQ636.01/04

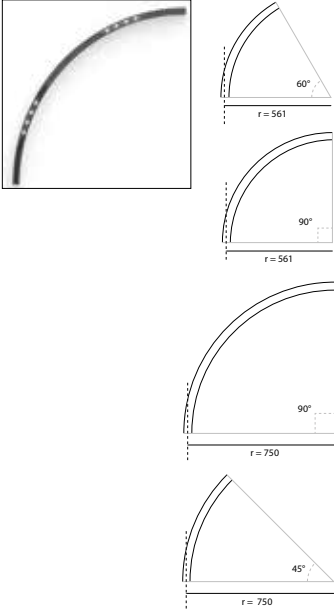

A.24 CEILING SHARPING EMISSION

White	Black	Brushed Silver	Brushed Copper	Brushed Bronze
				
01	04	15	18	20
Fast delivery		Delivery time on demand		

Accessories		Code			Code	
	Insulating spacer (1 pcs) between modules powered by different power supply	AQ352. 01/04 15/18/20			Louwer for linear modules Sharping kit L=1176 mm (2 louvers - 1 intermediate cover - 2 end covers) Sharping kit L=2352 mm (4 louvers - 3 intermediate cover - 2 end covers) X joint (1 louver + 4 cover) T joint (1 louver + 3 cover) 90° angle cover (2 pcs)	AQ260. 01/04 AQ261. 01/04 AQ015. 01/04 AQ014. 01/04 AQ262. 01/04
	End caps (2 pcs)	AQ350. 01/04 15/18/20				
	Cap for cable passage (1 pcs)	AQ353. 01/04 15/18/20				
	Transition cap track - diffusing track-sharping diffusing - sharpening	AQ394. 01/04 15/18/20			Louwer for curved modules R=561 mm / R=750 mm R=561 mm 60° order 1 pc 90° order 1 pc R=750 mm 45° order 1 pc 90° order 2 pcs	AQ911. 01/04
				Flexible cover 2 m Flexible cover 10 m	AQ921. 01/04 AQ920. 01/04	

Power supply accessory		Code
4pcs feed connectors (for powering multiple sections with a single power kit)		AQ90500
Power cable, 2x0.75 + 2x0.35, mm², white, 10 m (to realize customized power cables)		AQ90600
Power cable, 2x0.75 + 2x0.35, mm², white, 50 m (to realize customized power cables)		AQ90700
Power cable, 2x0.75 + 2x0.35, mm², black, 10 m (to realize customized power cables)		AQ90800
Power cable, 2x0.75 + 2x0.35, mm², black, 50 m (to realize customized power cables)		AQ90900

Each linear, angle and curved modules are provided with mechanical and electrical joints, and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176 mm lenght - 2 for 2352 mm lenght. End caps have to be ordered separately.

Sharping kit (louvers and covers) has to be ordered separately. The APP driver can not be controlled by DALI dimming system and viceversa. The white power kit is supplied with a white cable, while the black power kit is supplied with a black cable.

Power supply	Undimmable Code	Dimmable DALI Code	APP Code
320W Recessed power supply kit (cable length 2,2 m) for suspension modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ158. 01/04	AQ157. 01/04	AQ157. 01/04 APP
320W Recessed power supply kit (cable length 2,2 m) for recessed/ceiling modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ15901	AQ16901	AQ16901APP
240W Recessed power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 396x195x112h	AQ17801	AQ16801	AQ16801APP
240W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ173. 01/04	AQ172. 01/04	AQ172. 01/04 APP
150W Power supply kit (cable length 2,2 m) for recessed modules 230VAC-48VDC IP20 ☎ 400x110x49h	AQ179. 01/04	AQ177. 01/04	AQ177. 01/04 APP
240W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18000		
150W Bare power supply + plug (1 feed connector) ON-OFF 230VAC-48VDC IP20 ☎ 244x68x38h (for dimmable version to be combined with "DALI-Selv interface")	AQ18100		
DALI to DALI-Selv Interface 103x67x21h		DV1061	
320W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16800	AQ16800APP
240W Remote box power supply kit (2 feed connectors) 230VAC-48VDC IP20 ☎ 313x243x57,5h		AQ16000	AQ16000APP





A.24 configurator


Artemide provides tools to support the end customer and especially the lighting professionals in choosing the best lighting solution.

For an intuitive composition of the most complex systems, Artemide offers innovative and complete configurators on its website.


A.24 system Configurator is a useful tool to simplify the design of your composition.

After defining the layout of the space, the desired system can be created by a simple drag and drop of the various available modules. Once the project is completed, the system returns drawings and a complete datasheet with all the details to proceed with the order.


1. Build your space

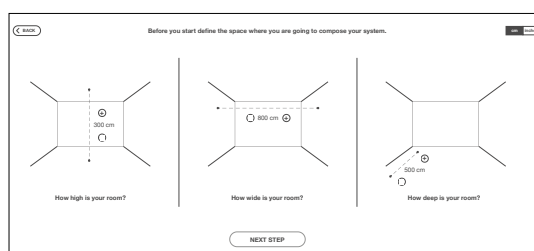

2. Drag and drop

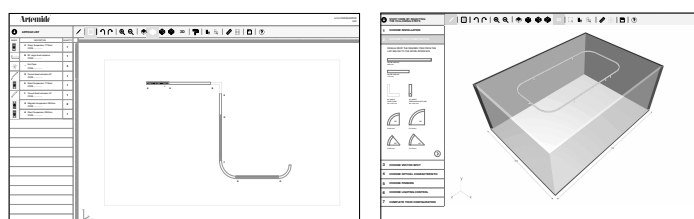

3. Save it and send it!

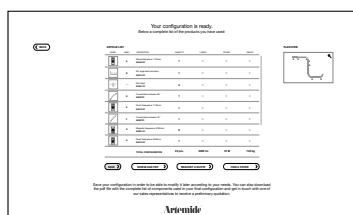







A.24 circular
stand-alone









A.24 CIRCULAR STAND-ALONE - DIFFUSED EMISSION

White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	220/240Vac 50/60Hz electronic ballast included.	MacAdam 2SDCM Lifetime L70 (9K) 50000 *MacAdam 3SDCM Lifetime L70 (17K) 102000 3000K - 4000K CRI = 90 2700K CRI = 80	IP20 ⊕ Uses 1 DALI addresses.
------------------------------	-------------	---	----------------------	----------------------	---	---	-------------------------------------


RECESSED

Ø	W	Flux ¹	CCT
1122 mm	95W	8082 lm	2700K
	88W	9044 lm	3000K*
	88W	9044 lm	4000K
1500 mm	132W	10776 lm	2700K
	118W	12058 lm	3000K*
	118W	12058 lm	4000K

Formwork (aluminum) included

Code
AQ54401
AQ54001
AQ54101
AQ55401
AQ55001
AQ55101

APP
AQ54401APP
AQ54001APP
AQ54101APP
AQ55401APP
AQ55001APP
AQ55101APP




SUSPENSION

Ø	W	Flux ¹	CCT
1122 mm	95W	8082 lm	2700K
	88W	9044 lm	3000K*
	88W	9044 lm	4000K
1500 mm	132W	10776 lm	2700K
	118W	12058 lm	3000K*
	118W	12058 lm	4000K

Code
AQ744. 01/04 15/18/20
AQ740. 01/04 15/18/20
AQ741. 01/04 15/18/20
AQ754. 01/04 15/18/20
AQ750. 01/04 15/18/20
AQ751. 01/04 15/18/20

APP
AQ744. 01/04 APP 15/18/20 APP
AQ740. 01/04 APP 15/18/20 APP
AQ741. 01/04 APP 15/18/20 APP
AQ754. 01/04 APP 15/18/20 APP
AQ750. 01/04 APP 15/18/20 APP
AQ751. 01/04 APP 15/18/20 APP



Cable length for suspension version

For Dali L 2100 mm

For APP L 1750 mm

Power supply kit color specifications

DALI version: White body + white ceiling rose + white cable. Silver/copper/bronze/black body + black ceiling rose + black cable.

APP version: White body + white ceiling rose + transparent cable. Silver/copper/bronze/black body + black ceiling rose + transparent cable.

CEILING

Ø	W	Flux ¹	CCT
1122 mm	95W	8082 lm	2700K
	88W	9044 lm	3000K*
	88W	9044 lm	4000K
1550 mm	132W	10776 lm	2700K
	118W	12058 lm	3000K*
	118W	12058 lm	4000K

Dimmable DALI
AQ644. 01/04 15/18/20
AQ640. 01/04 15/18/20
AQ641. 01/04 15/18/20
AQ654. 01/04 15/18/20
AQ650. 01/04 15/18/20
AQ651. 01/04 15/18/20

APP
AQ644. 01/04 APP 15/18/20 APP
AQ640. 01/04 APP 15/18/20 APP
AQ641. 01/04 APP 15/18/20 APP
AQ654. 01/04 APP 15/18/20 APP
AQ650. 01/04 APP 15/18/20 APP
AQ651. 01/04 APP 15/18/20 APP

Accessories

Trimless frame to be used for recessing the power kit

For suspension Stand-alone Ø 1122 and Ø 1500

For ceiling Stand-alone Ø 1122 and Ø 1500

Code
AQ94000
AQ94200

¹ Direct luminous flux: measured using white body.
With black body -17% output flux.

A.24 CIRCULAR STAND-ALONE - DIFFUSED EMISSION

FLEXIBLE OPAL DIFFUSER SCREEN

	Emission	White body + flexible diffuser cod. AQ90...	Black body + flexible diffuser cod. AQ90...
Ø 1122 mm			
2700K	Direct	8082 lm	6375 lm
3000K	Direct	9044 lm	7101 lm
4000K	Direct	9044 lm	7101 lm
Ø 1500 mm			
2700K	Direct	10776 lm	8499 lm
3000K	Direct	12058 lm	9468 lm
4000K	Direct	12058 lm	9468 lm

Flux for Silver body is the same of White body.

Flux for Copper and Bronze body is the same of Black body.







A.24 CIRCULAR STAND-ALONE - SHARPING EMISSION


White 01 Fast delivery	Black 04	Brushed Silver 15 Delivery time on demand	Brushed Copper 18	Brushed Bronze 20	FL 	220/240Vac 50/60Hz electronic ballast included. Sharping kit has to be ordered separately. *Uses 1 DALI address ** Uses 2 DALI addresses	MacAdam 2SDCM Lifetime L90 (20K) 118000 3000K - 4000K CRI = 90 2700K CRI = 80	IP20
------------------------------	-------------	---	----------------------	----------------------	---	---	--	------

RECESSED

Direct emission				
Ø	W	Beam	Flux	CCT
1122 mm*	42W	FL 24°	3056 lm	2700K
			3256 lm	3000K
			3485 lm	4000K
1500 mm**	83W	FL 24°	6112 lm	2700K
			6512 lm	3000K
			6969 lm	4000K

Dimmable DALI	
Code	
AQ545. 01/04	
AQ542. 01/04	
AQ543. 01/04	
AQ555. 01/04	
AQ552. 01/04	
AQ553. 01/04	

APP	
Code	
AQ545. 01/04 APP	
AQ542. 01/04 APP	
AQ543. 01/04 APP	
AQ555. 01/04 APP	
AQ552. 01/04 APP	
AQ553. 01/04 APP	




Formwork (aluminum) included

SUSPENSION

Direct emission				
Ø	W	Beam	Flux	CCT
1122 mm*	42W	FL 24°	3056 lm	2700K
			3256 lm	3000K
			3485 lm	4000K
1500 mm**	83W	FL 24°	6112 lm	2700K
			6512 lm	3000K
			6969 lm	4000K

Dimmable DALI	
Code	
AQ745. 01/04	15/18/20
AQ742. 01/04	15/18/20
AQ743. 01/04	15/18/20
AQ755. 01/04	15/18/20
AQ752. 01/04	15/18/20
AQ753. 01/04	15/18/20

APP	
Code	
AQ745. 01/04 APP	15/18/20 APP
AQ742. 01/04 APP	15/18/20 APP
AQ743. 01/04 APP	15/18/20 APP
AQ755. 01/04 APP	15/18/20 APP
AQ752. 01/04 APP	15/18/20 APP
AQ753. 01/04 APP	15/18/20 APP



Cable length for suspension version
for Dali L 2100 mm
for APP L 1750 mm

Power supply kit color specifications

DALI version: White body + white ceiling rose + white cable. Silver/copper/bronze/black body + black ceiling rose + black cable.


APP version: White body + white ceiling rose + transparent cable. Silver/copper/bronze/black body + black ceiling rose + transparent cable.

CEILING

Direct emission				
Ø	W	Beam	Flux	CCT
1122 mm*	42W	FL 24°	3056 lm	2700K
			3256 lm	3000K
			3485 lm	4000K
1500 mm**	83W	FL 24°	6112 lm	2700K
			6512 lm	3000K
			6969 lm	4000K

Dimmable DALI	
Code	
AQ645. 01/04	15/18/20
AQ642. 01/04	15/18/20
AQ643. 01/04	15/18/20
AQ655. 01/04	15/18/20
AQ652. 01/04	15/18/20
AQ653. 01/04	15/18/20

APP	
Code	
AQ645. 01/04 APP	15/18/20 APP
AQ642. 01/04 APP	15/18/20 APP
AQ643. 01/04 APP	15/18/20 APP
AQ655. 01/04 APP	15/18/20 APP
AQ652. 01/04 APP	15/18/20 APP
AQ653. 01/04 APP	15/18/20 APP



Sharping accessories



Sharping kit R=561 mm
(4 louvers - 4 covers)
Sharping kit R=750 mm
(8 louvers - 8 covers)

Code
AQ930. 01/04
AQ931. 01/04

Accessories

Trimless frame to be used for recessing the power kit
For suspension Stand-alone Ø 1122 and Ø 1500
For ceiling Stand-alone Ø 1122 and Ø 1500

Code
AQ94000
AQ94200







A.24
wall

A.24 WALL - DIFFUSED EMISSION

White

Black

01

04

Fast delivery

Brushed Silver

Brushed Copper

Brushed Bronze

15

18

20

Delivery time on demand

220/240Vac 50/60Hz electronic ballast included

MacAdam 3SDCM


Life L70 (17K) 102000h

IP20

Direct and indirect emission

Length	W	CRI	Flux	CCT
300 mm	23 W	90	1919 lm	2700K
			2036 lm	3000K


Code
BK010. 01/04 15/18/20
BK020. 01/04 15/18/20



Direct and indirect emission

Length	W	CRI	Flux	CCT
600 mm	30 W	90	2601 lm	2700K
			2759 lm	3000K


Code
BK110. 01/04 15/18/20
BK120. 01/04 15/18/20




Direct and indirect emission

Length	W	CRI	Flux	CCT
900 mm	45 W	90	3901 lm	2700K
			4139lm	3000K

Code
BK210. 01/04 15/18/20
BK220. 01/04 15/18/20

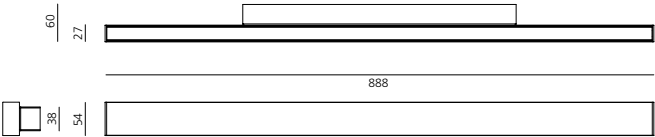

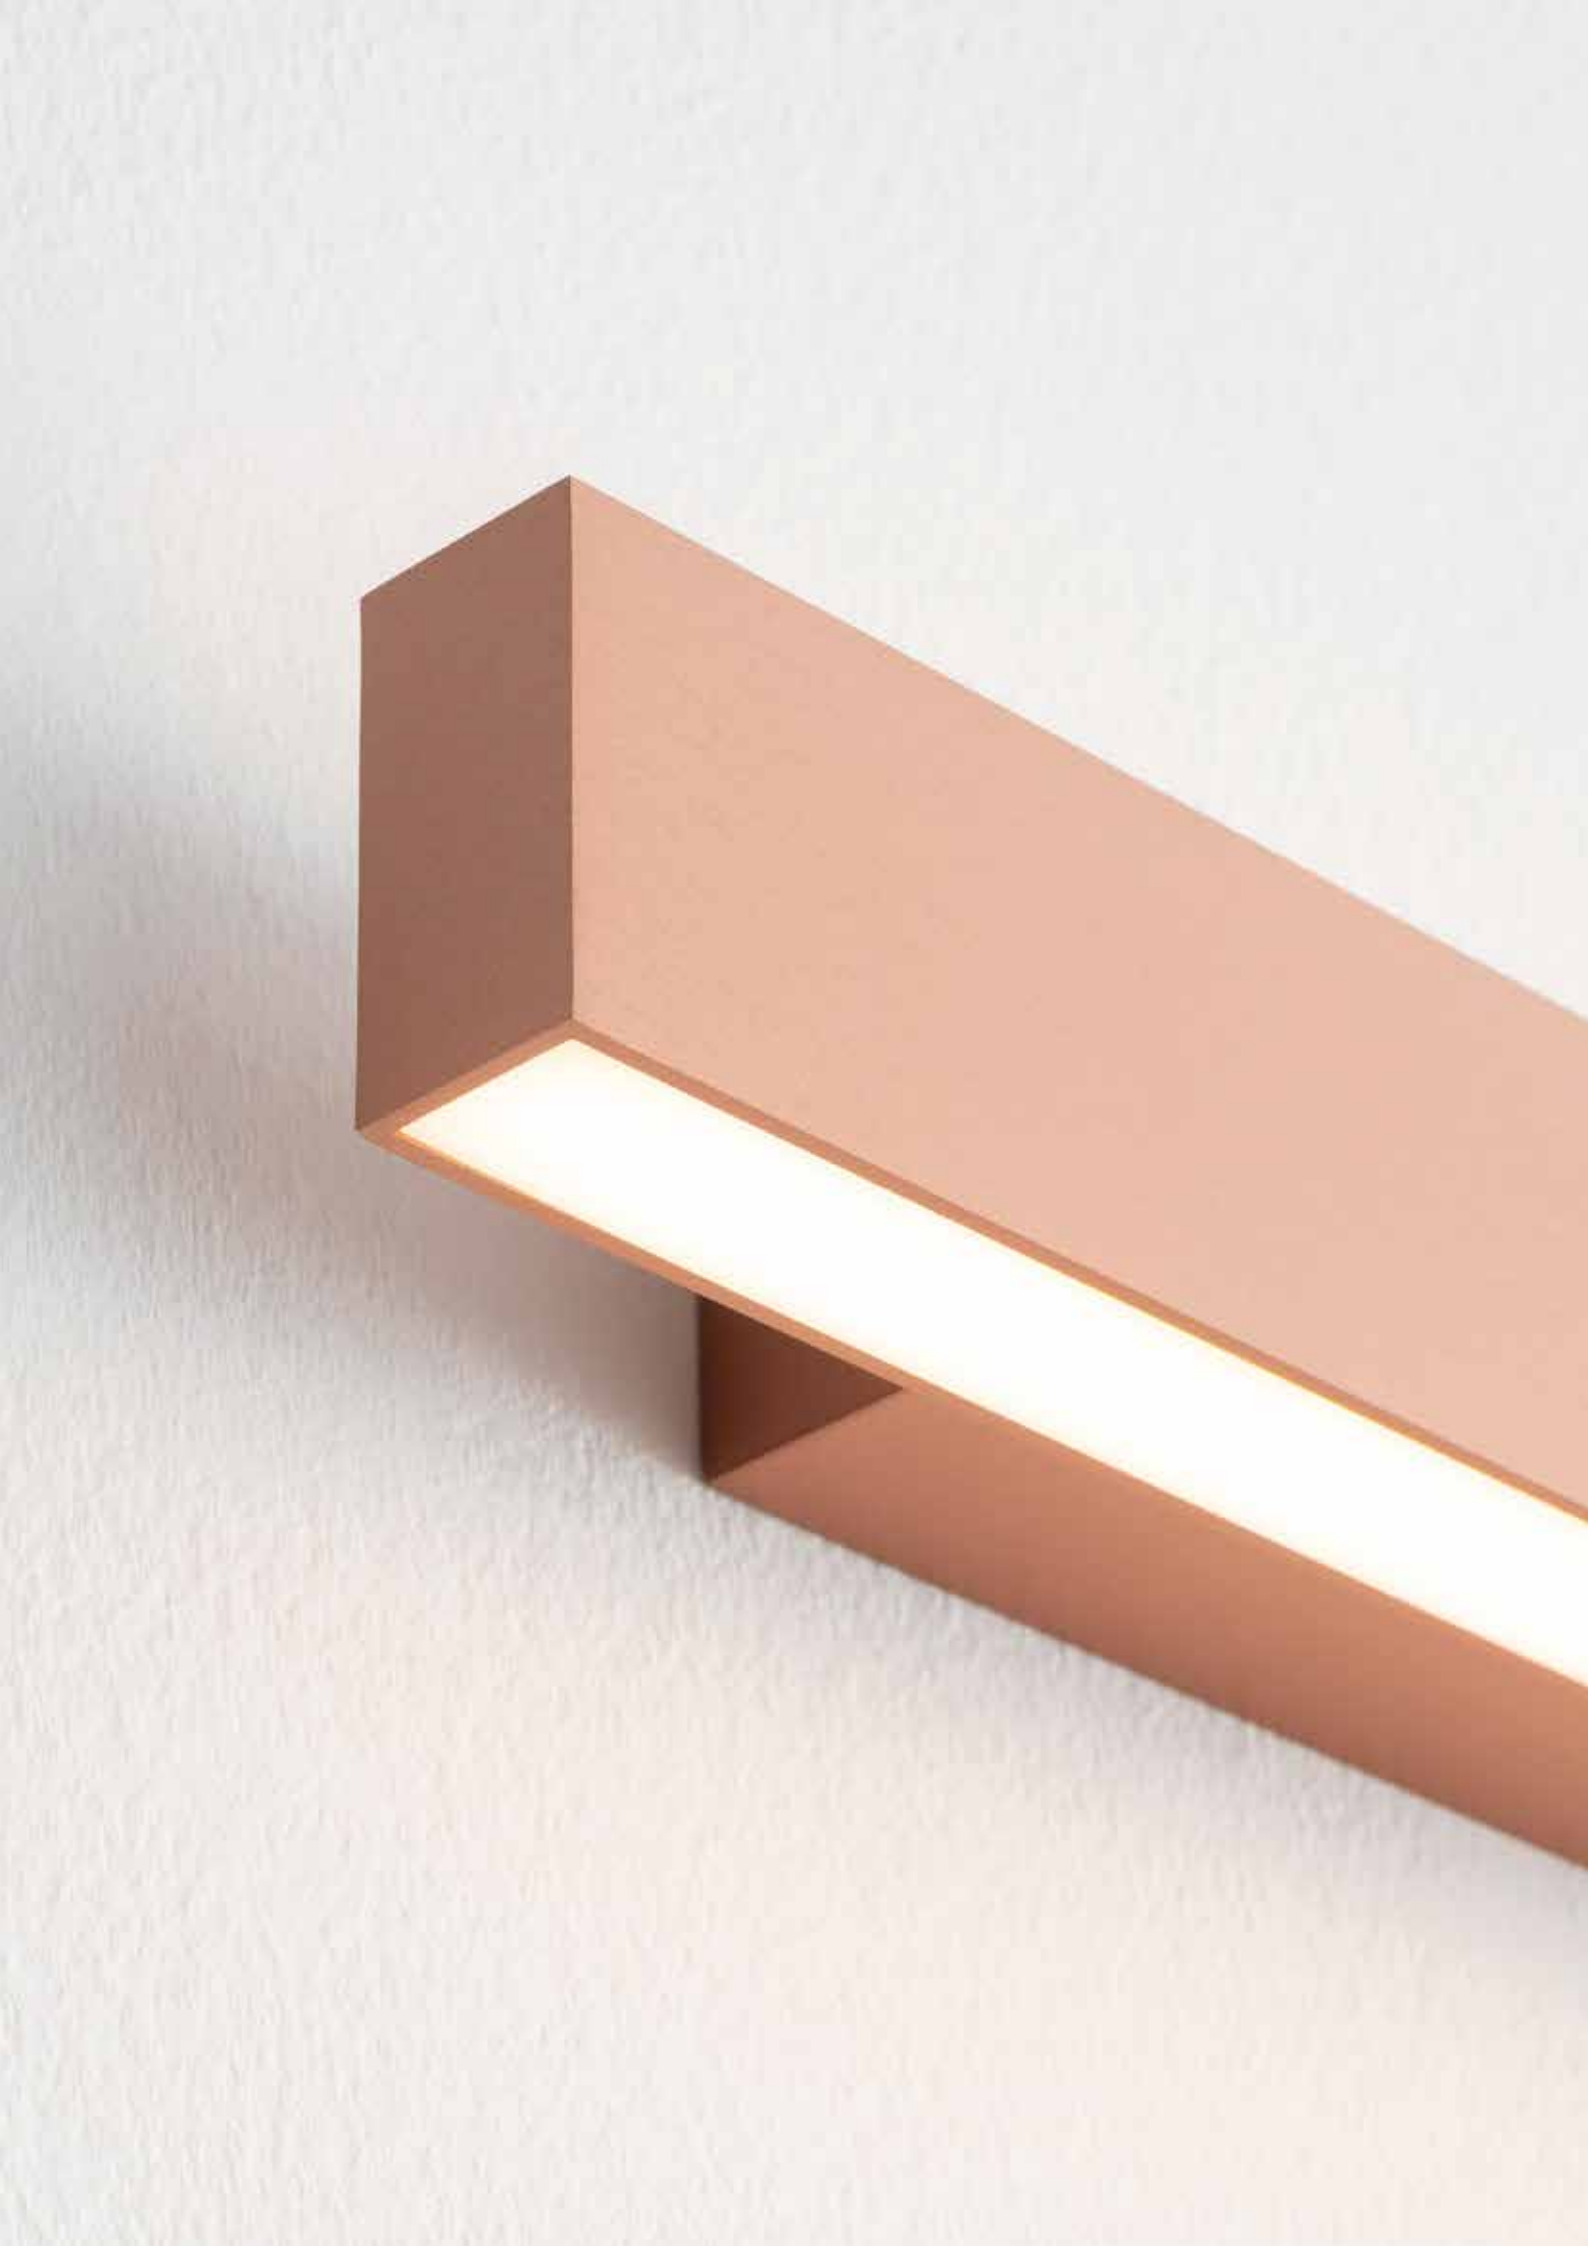



A.24 is compatible with **Artemide App**

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both the Design and the Architectural Catalogues.



Download Artemide App
and find more information on
artemide.com

Headquarters

Artemide S.p.A.

Via Bergamo, 18
20006 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Artemide S.p.A.

si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

Artemide S.p.A.

reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

Artemide S.p.A.

se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

Artemide S.p.A.

behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.

se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálogo.

2025

For information regarding distributors
and points of sale, please visit our website
artemide.com or email: info@artemide.com