

# Sharp Family



**Artemide®**

# Sharp

## Carlotta de Bevilacqua 2016

A patented high-efficiency optical system combining a polynomial optical unit with geometric screening of the beam's viewing angle.

Highly uniform lighting and full emission control.

Total absence of any lighting defects, such as spots or multiple shadows.

Recess depth 60 mm.

Suited for 1 to 25 mm ceilings.

Available in the trim, trimless and SMD versions.

PATENT PENDING



For further information on Sharp  
visit [artemide.com](http://artemide.com)




Only for recessed version  
(4x, 6x, 12X, 16x)






# Sharp trim - trimless

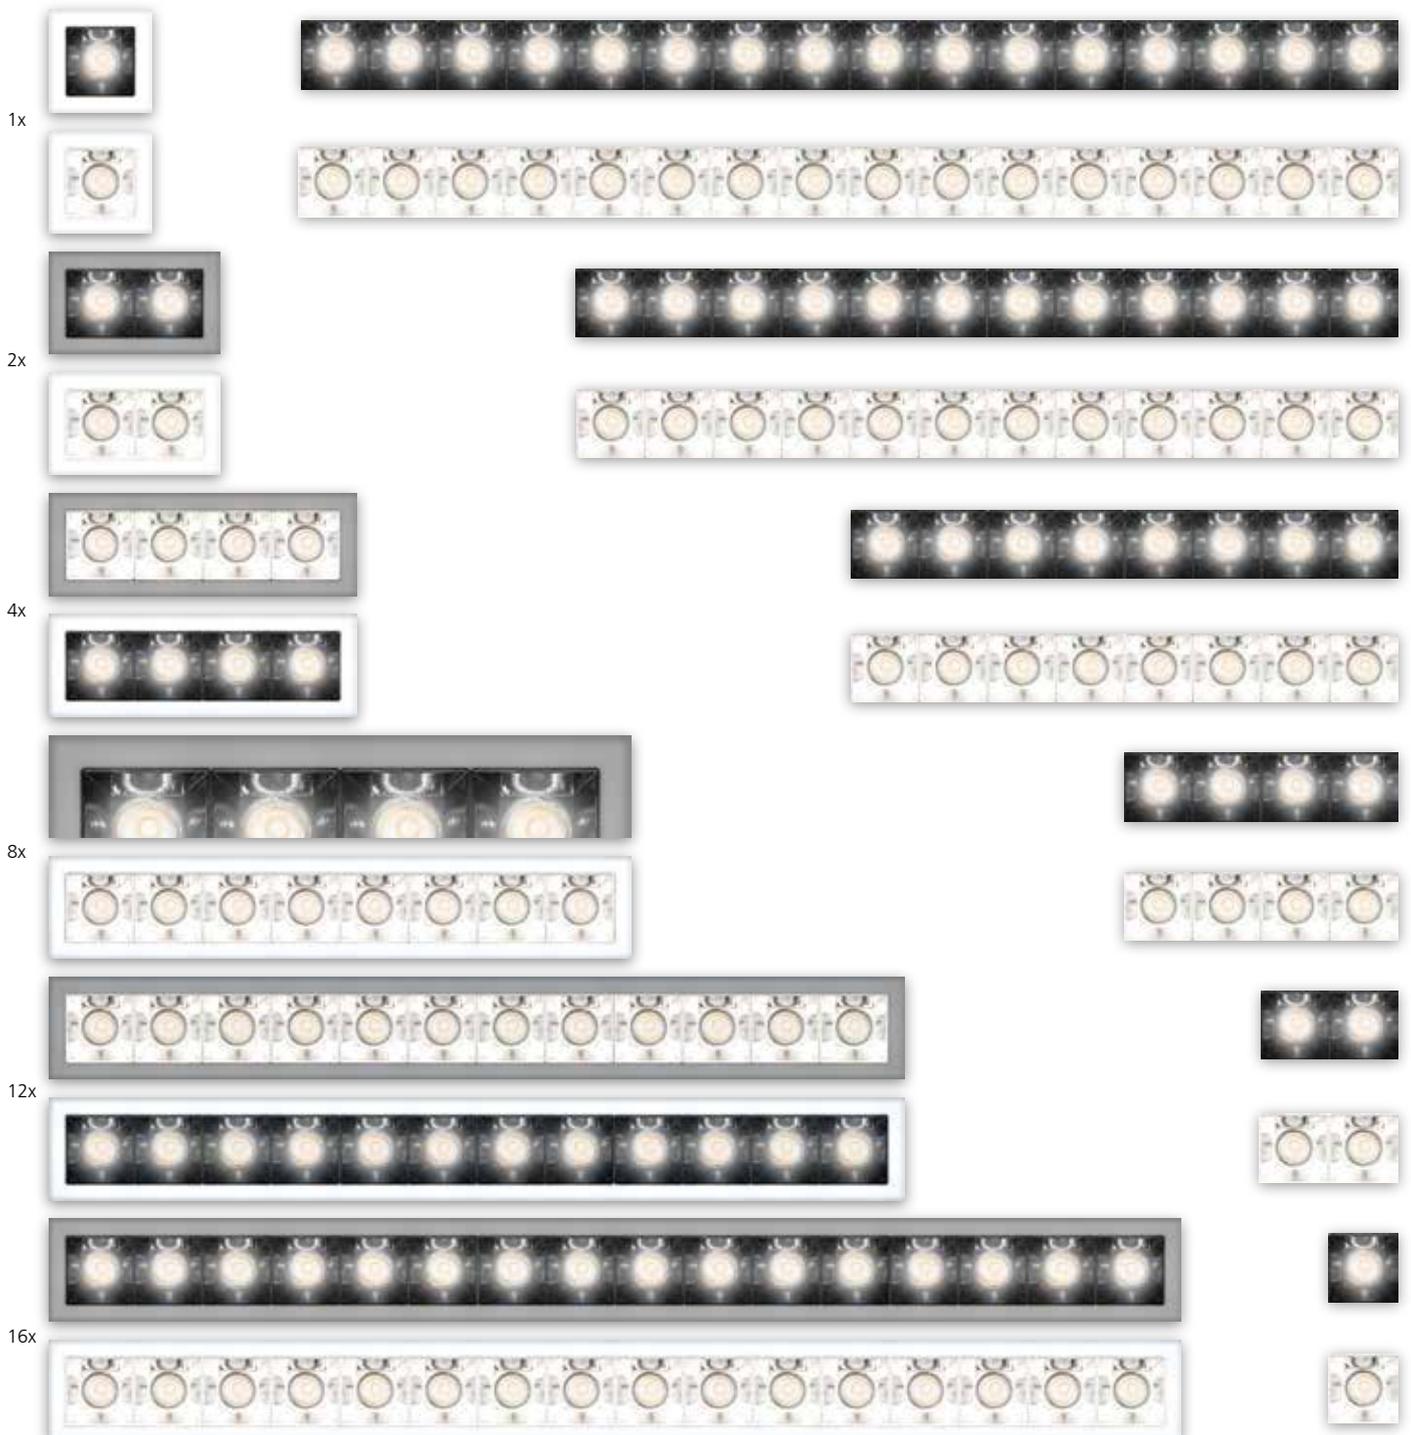




# Sharp trim - trimless typologies

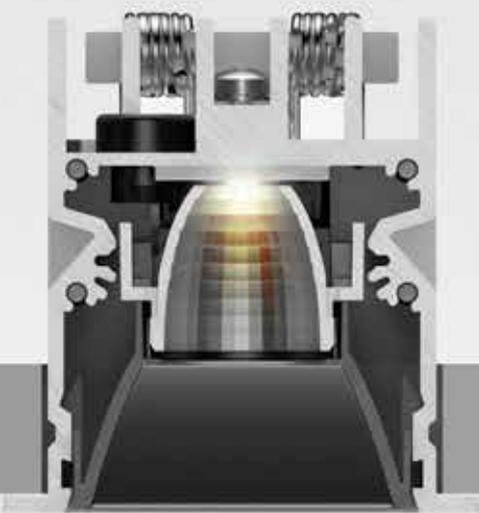



Sharp trim

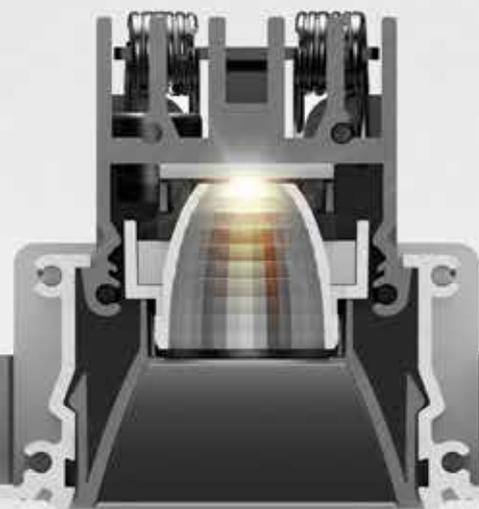

Sharp trimless

Minimum distance from the wall

Minimum distance between the devices

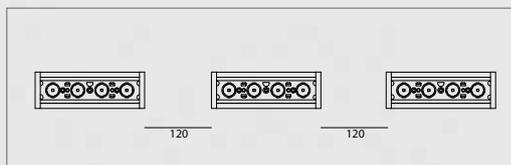




# Sharp trim

Optic unit



Louvres

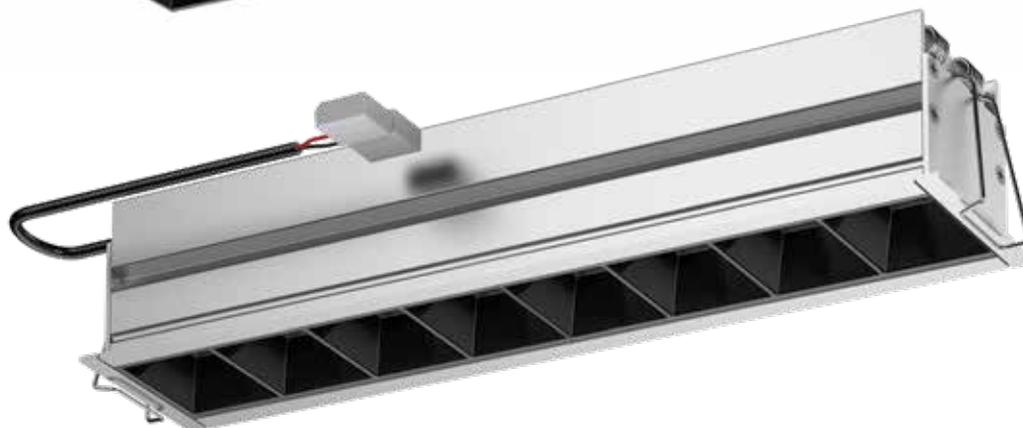


## Driver

	Vac	L <sub>mm</sub>	W <sub>mm</sub>	H <sub>mm</sub>	Optic units	Min. ceiling depth (mm)	
7,2 W 900mA	220-240	76	32	22	1x / 2x	80 / 60	Undimmable
19,8 W 900mA	220-240	125	38	23	4x	60	Undimmable
20 W 900mA	220-240	180	32	32	4x	80	DALI
32 W 1000mA	220-240	129,5	42	30	8x	80	Undimmable
50 W 1050mA	220-240	124	79	22	12x / 16x	80	Undimmable
40 W 900mA	220-240	97	43	30	8x / 16x	80	Undimmable
25 W 900mA	220-240	164	38	24,5	1x / 2x / 4x / 8x	150 / 130 / 80 / 60	DALI
48 W 900mA	220-240	110	75	25,7	12x / 16x	80 / 80	DALI
32 W 900mA	220-240	156	53	26	4x / 8x	90	DALI push, 0-10V, 1-10V
25 W 150-900mA	110-240	111	52	22	8x / 12x / 16x	100	DALI push, 0-10V, 1-10V

## Code

DV1001  
 DV1002  
 DV1008  
 DV1004  
 DV1005  
 DV1006  
 DV1003  
 DV1007  
 M077401  
 DV1126

# SHARP TRIM





Driver 900mA SELV and louvres supplied separately.

MacAdam 2SDCM  
Life L90 (17K) 103000h  
CRI >90




	Watt	Beam	Flux	CCT	Code
1 optic unit	3 W	SP 20°	189 lm	2700 K	<b>AF000.</b> 01/05/04
			201 lm	3000 K	<b>AF003.</b> 01/05/04
			215 lm	4000 K	<b>AF006.</b> 01/05/04
		XF 36°	177 lm	2700 K	<b>AF001.</b> 01/05/04
			188 lm	3000 K	<b>AF004.</b> 01/05/04
			201 lm	4000 K	<b>AF007.</b> 01/05/04
		WF 52°	183 lm	2700 K	<b>AF002.</b> 01/05/04
			195 lm	3000 K	<b>AF005.</b> 01/05/04
208 lm	4000 K		<b>AF008.</b> 01/05/04		
2 optic units	5,5 W	SP 20°	377 lm	2700 K	<b>AF050.</b> 01/05/04
			402 lm	3000 K	<b>AF053.</b> 01/05/04
			430 lm	4000 K	<b>AF056.</b> 01/05/04
		XF 36°	353 lm	2700 K	<b>AF051.</b> 01/05/04
			376 lm	3000 K	<b>AF054.</b> 01/05/04
			403 lm	4000 K	<b>AF057.</b> 01/05/04
		WF 52°	366 lm	2700 K	<b>AF052.</b> 01/05/04
			389 lm	3000 K	<b>AF055.</b> 01/05/04
417 lm	4000 K		<b>AF058.</b> 01/05/04		
4 optic units	11 W	SP 20°	755 lm	2700 K	<b>AF100.</b> 01/05/04
			804 lm	3000 K	<b>AF103.</b> 01/05/04
			860 lm	4000 K	<b>AF106.</b> 01/05/04
		XF 36°	706 lm	2700 K	<b>AF101.</b> 01/05/04
			752 lm	3000 K	<b>AF104.</b> 01/05/04
			805 lm	4000 K	<b>AF107.</b> 01/05/04
		WF 52°	731 lm	2700 K	<b>AF102.</b> 01/05/04
			779 lm	3000 K	<b>AF105.</b> 01/05/04
834 lm	4000 K		<b>AF108.</b> 01/05/04		
8 optic units	22 W	SP 20°	1509 lm	2700 K	<b>AF147.</b> 01/05/04
			1608 lm	3000 K	<b>AF150.</b> 01/05/04
			1721 lm	4000 K	<b>AF153.</b> 01/05/04
		XF 36°	1412 lm	2700 K	<b>AF148.</b> 01/05/04
			1504 lm	3000 K	<b>AF151.</b> 01/05/04
			1610 lm	4000 K	<b>AF154.</b> 01/05/04
		WF 52°	1462 lm	2700 K	<b>AF149.</b> 01/05/04
			1558 lm	3000 K	<b>AF152.</b> 01/05/04
1667 lm	4000 K		<b>AF155.</b> 01/05/04		
12 optic units	33 W	SP 20°	2263 lm	2700 K	<b>AF197.</b> 01/05/04
			2412 lm	3000 K	<b>AF200.</b> 01/05/04
			2581 lm	4000 K	<b>AF203.</b> 01/05/04
		XF 36°	2118 lm	2700 K	<b>AF198.</b> 01/05/04
			2256 lm	3000 K	<b>AF201.</b> 01/05/04
			2415 lm	4000 K	<b>AF204.</b> 01/05/04
		WF 52°	2193 lm	2700 K	<b>AF199.</b> 01/05/04
			2337 lm	3000 K	<b>AF202.</b> 01/05/04
2501 lm	4000 K		<b>AF205.</b> 01/05/04		
16 optic units	44 W	SP 20°	3019 lm	2700 K	<b>AF247.</b> 01/05/04
			3215 lm	3000 K	<b>AF250.</b> 01/05/04
			3442 lm	4000 K	<b>AF253.</b> 01/05/04
		XF 36°	2824 lm	2700 K	<b>AF248.</b> 01/05/04
			3009 lm	3000 K	<b>AF251.</b> 01/05/04
			3220 lm	4000 K	<b>AF254.</b> 01/05/04
		WF 52°	2924 lm	2700 K	<b>AF249.</b> 01/05/04
			3316 lm	3000 K	<b>AF252.</b> 01/05/04
3335 lm	4000 K		<b>AF255.</b> 01/05/04		

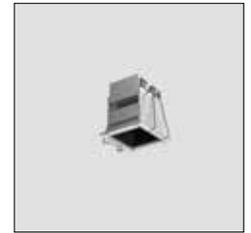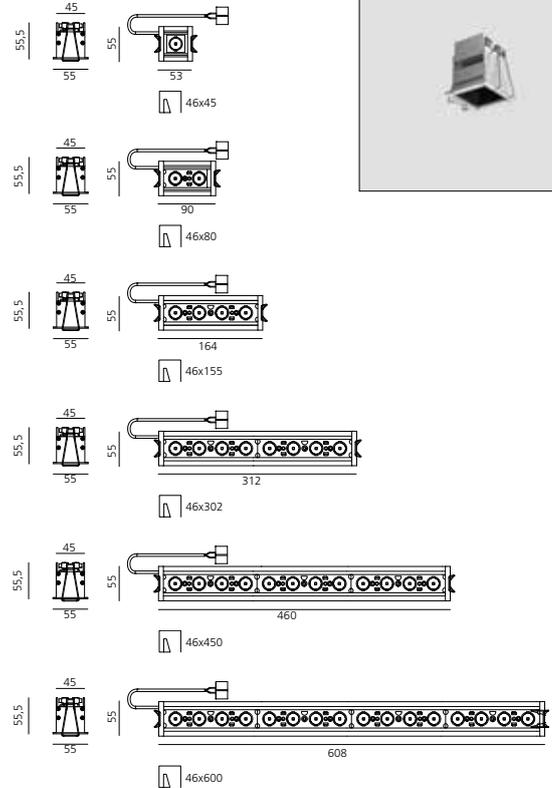


## Louvres



Code
<b>AF950.</b> 01/04
<b>AF951.</b> 01/04
<b>AF952.</b> 01/04




## Accessories

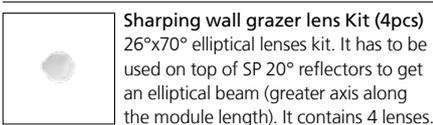

Code
<b>AF06000</b>

# Sharp trimless

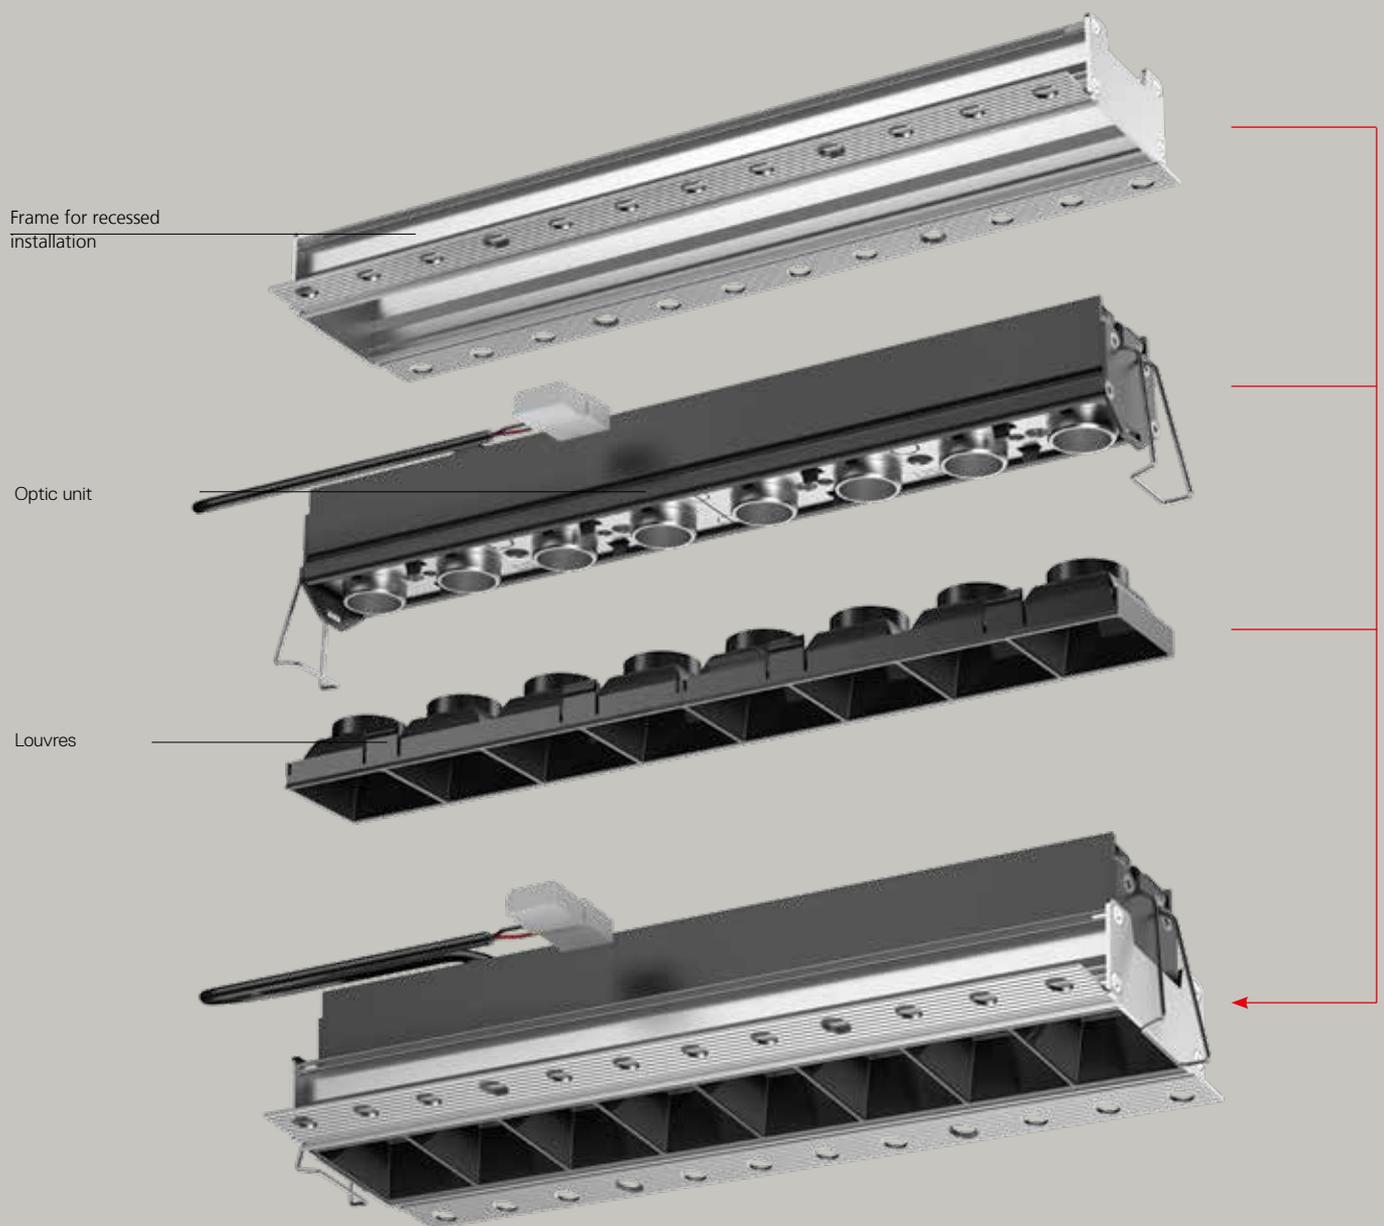

# SHARP TRIMLESS




Driver 900mA SELV and louvres supplied separately.

MacAdam 2SDCM  
Life L90 (17K) 103000h  
CRI >90



	Watt	Beam	Flux	CCT	Code	
1 optic unit	3 W	SP 20°	189 lm	2700 K	<b>AF50000</b>	
			201 lm	3000 K	<b>AF50300</b>	
			215 lm	4000 K	<b>AF50600</b>	
	XF 36°	177 lm	2700 K	<b>AF50100</b>		
			3000 K	<b>AF50400</b>		
			4000 K	<b>AF50700</b>		
	WF 52°	183 lm	2700 K	<b>AF50200</b>		
			3000 K	<b>AF50500</b>		
			4000 K	<b>AF50800</b>		
2 optic units	5,5 W	SP 20°	371 lm	2700 K	<b>AF55000</b>	
			402 lm	3000 K	<b>AF55300</b>	
			430 lm	4000 K	<b>AF55600</b>	
		XF 36°	353 lm	2700 K	<b>AF55100</b>	
				3000 K	<b>AF55400</b>	
	4000 K			<b>AF55700</b>		
	WF 52°	366 lm	2700 K	<b>AF55200</b>		
			3000 K	<b>AF55500</b>		
			4000 K	<b>AF55800</b>		
	4 optic units	11 W	SP 20°	755 lm	2700 K	<b>AF60000</b>
				804 lm	3000 K	<b>AF60300</b>
				860 lm	4000 K	<b>AF60600</b>
			XF 36°	706 lm	2700 K	<b>AF60100</b>
					3000 K	<b>AF60400</b>
					4000 K	<b>AF60700</b>
WF 52°			731 lm	2700 K	<b>AF60200</b>	
				3000 K	<b>AF60500</b>	
				4000 K	<b>AF60800</b>	
8 optic units	22 W	SP 20°	1509 lm	2700 K	<b>AF64700</b>	
			1608 lm	3000 K	<b>AF65000</b>	
			1721 lm	4000 K	<b>AF65300</b>	
		XF 36°	11412 lm	2700 K	<b>AF64800</b>	
				3000 K	<b>AF65100</b>	
				4000 K	<b>AF65400</b>	
		WF 52°	1462 lm	2700 K	<b>AF64900</b>	
				3000 K	<b>AF65200</b>	
				4000 K	<b>AF65500</b>	
12 optic units	33 W	SP 20°	2263 lm	2700 K	<b>AF69700</b>	
			2412 lm	3000 K	<b>AF70000</b>	
			2581 lm	4000 K	<b>AF70300</b>	
		XF 36°	2118 lm	2700 K	<b>AF69800</b>	
				3000 K	<b>AF70100</b>	
				4000 K	<b>AF70400</b>	
		WF 52°	2193 lm	2700 K	<b>AF69900</b>	
				3000 K	<b>AF70200</b>	
				4000 K	<b>AF70500</b>	
16 optic units	44 W	SP 20°	3019 lm	2700 K	<b>AF74700</b>	
			3215 lm	3000 K	<b>AF75000</b>	
			3442 lm	4000 K	<b>AF75300</b>	
		XF 36°	2824 lm	2700 K	<b>AF74800</b>	
				3000 K	<b>AF75100</b>	
				4000 K	<b>AF75400</b>	
		WF 52°	2924 lm	2700 K	<b>AF74900</b>	
				3000 K	<b>AF75200</b>	
				4000 K	<b>AF75500</b>	

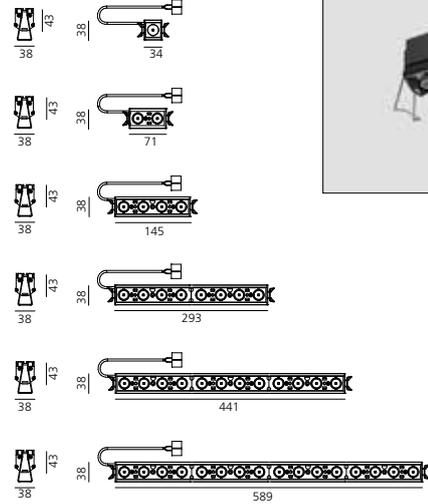

# SHARP TRIMLESS

White Black



Driver 900mA SELV and louvres supplied separately.


## Frame for recessed installation



1X  
2X  
4X  
8X  
12X  
16X

### Code

**AF90000**  
**AF90100**  
**AF90200**  
**AF90300**  
**AF90400**  
**AF90500**

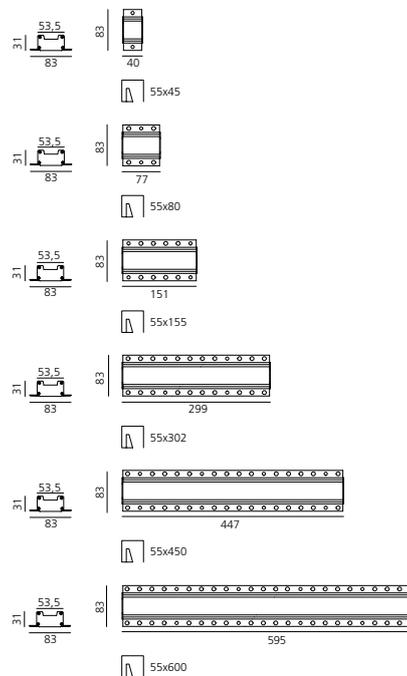


## Louvres



1X  
2X  
4X

### Code

**AF950. 01/04**  
**AF951. 01/04**  
**AF952. 01/04**



## Accessories



**Sharpening wall grazer lens Kit (4pcs)**  
26°x70° elliptical lenses kit. It has to be used on top of SP 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.

### Code


**AF06000**

## Driver

	Vac	L <sub>mm</sub>	W <sub>mm</sub>	H <sub>mm</sub>	Optic units	Min. ceiling depth (mm)	
7,2 W 900mA	220-240	76	32	22	1x / 2x	80 / 60	Undimmable
19,8 W 900mA	220-240	125	38	23	4x	60	Undimmable
20 W 900mA	220-240	180	32	32	4x	80	DALI
32 W 1000mA	220-240	129,5	42	30	8x	80	Undimmable
50 W 1050mA	220-240	124	79	22	12x / 16x	80	Undimmable
40 W 900mA	220-240	97	43	30	8x / 16x	80	Undimmable
25 W 900mA	220-240	164	38	24,5	1x / 2x / 4x / 8x	150 / 130 / 80 / 60	DALI
48 W 900mA	220-240	110	75	25,7	12x / 16x	80 / 80	DALI
32 W 900mA	220-240	156	53	26	4x / 8x	90	DALI push, 0-10V, 1-10V
25 W 150-900mA	110-240	111	52	22	8x / 12x / 16x	100	DALI push, 0-10V, 1-10V

### Code

**DV1001**  
**DV1002**  
**DV1008**  
**DV1004**  
**DV1005**  
**DV1006**  
**DV1003**  
**DV1007**  
**M077401**  
**DV1126**

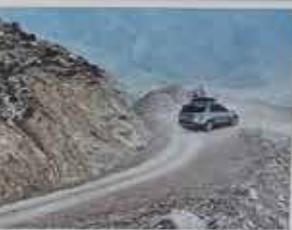


# Sharp wall washer

## SHARP TRIM WALL WASHER




White  
White  
01

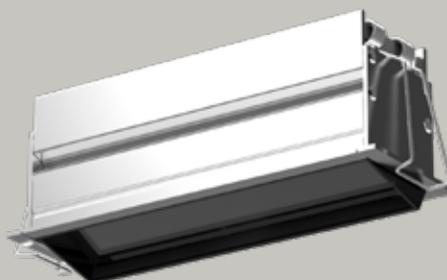

Silver  
Black  
05




White  
Black  
54

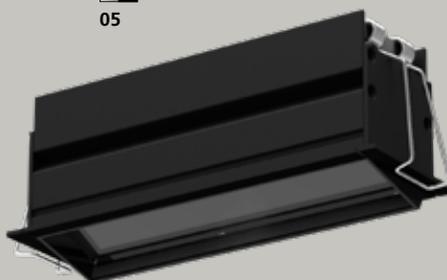


Black  
Black  
04

## SHARP TRIMLESS WALL WASHER

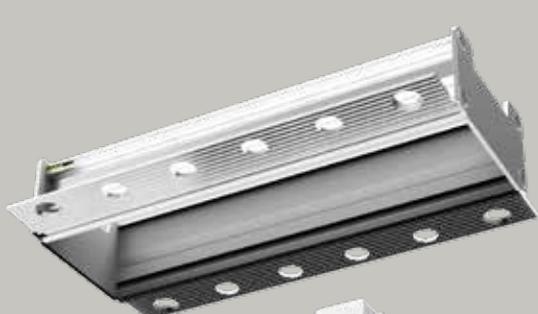


White  
White  
01

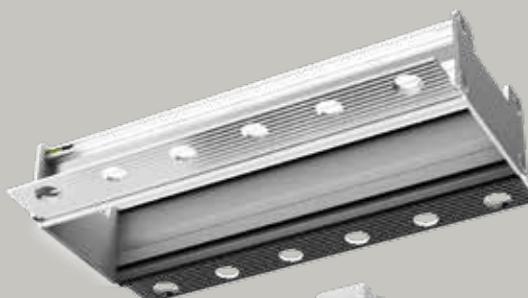

Black  
Black  
04

# SHARP TRIM - TRIMLESS WALL WASHER

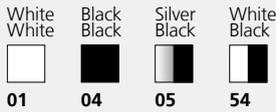


Driver 900mA SELV a supplied separately.  
Louvres included.

MacAdam 2SDCM  
Life L90 (17K) 103000h  
CRI >90

IP20


## TRIM

	W	Flux	CCT	Code
1 optic unit	11 W	657 lm	2700 K	<b>AF109.</b> 01/04/05/54
		657 lm	3000 K	<b>AF110.</b> 01/04/05/54
		657 lm	4000 K	<b>AF111.</b> 01/04/05/54
2 optic units	22 W	1314 lm	2700 K	<b>AF156.</b> 01/04/05/54
		1314 lm	3000 K	<b>AF157.</b> 01/04/05/54
		1314 lm	4000 K	<b>AF158.</b> 01/04/05/54
3 optic units	33 W	1971 lm	2700 K	<b>AF206.</b> 01/04/05/54
		1971 lm	3000 K	<b>AF207.</b> 01/04/05/54
		1971 lm	4000 K	<b>AF208.</b> 01/04/05/54
4 optic units	44 W	2628 lm	2700 K	<b>AF256.</b> 01/04/05/54
		2628 lm	3000 K	<b>AF257.</b> 01/04/05/54
		2628 lm	4000 K	<b>AF258.</b> 01/04/05/54

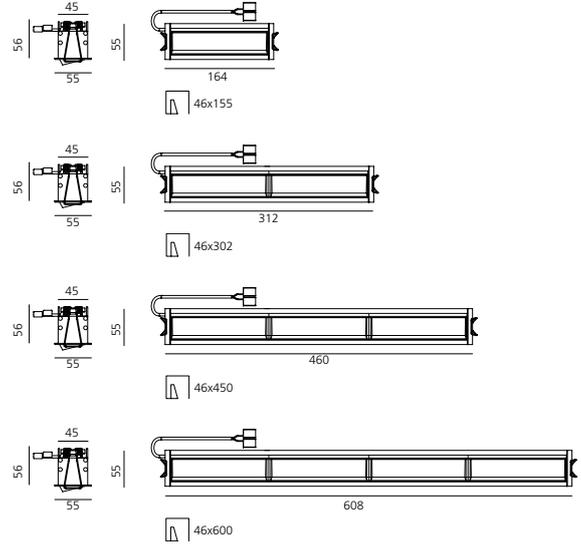

## TRIMLESS

	W	Flux	CCT	Code
1 optic unit	12 W	657 lm	2700 K	<b>AF609.</b> 01/04
		657 lm	3000 K	<b>AF610.</b> 01/04
		657 lm	4000 K	<b>AF611.</b> 01/04
2 optic units	22 W	1314 lm	2700 K	<b>AF656.</b> 01/04
		1314 lm	3000 K	<b>AF657.</b> 01/04
		1314 lm	4000 K	<b>AF658.</b> 01/04
3 optic units	33 W	1971 lm	2700 K	<b>AF706.</b> 01/04
		1971 lm	3000 K	<b>AF707.</b> 01/04
		1971 lm	4000 K	<b>AF708.</b> 01/04
4 optic units	44 W	2628 lm	2700 K	<b>AF756.</b> 01/04
		2628 lm	3000 K	<b>AF757.</b> 01/04
		2628 lm	4000 K	<b>AF758.</b> 01/04

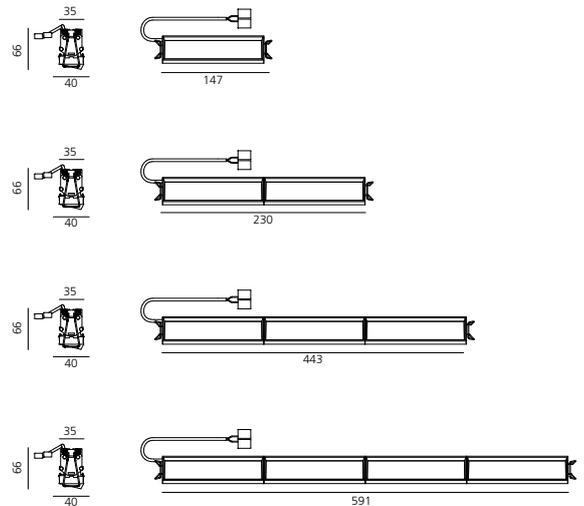


## Frame for recessed installation



1X  
2X  
3X  
4X

Code
<b>AF90200</b>
<b>AF90300</b>
<b>AF90400</b>
<b>AF90500</b>

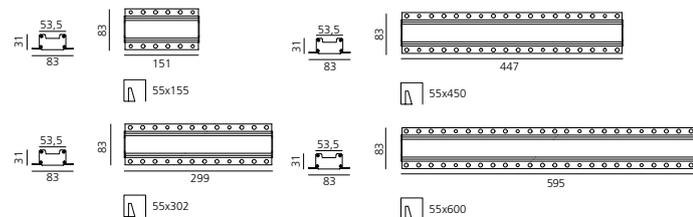

## Driver

	Vac	L <sub>mm</sub>	W <sub>mm</sub>	H <sub>mm</sub>	Optic units	Min. ceiling depth (mm)	
19,8 W 900mA	220-240	125	38	23	1x	60	Undimmable
20 W 900mA	220-240	180	32	32	1x	80	DALI
32 W 1000mA	220-240	129,5	42	30	2x	80	Undimmable
50 W 1050mA	220-240	124	79	22	3x / 4x	80	Undimmable
40 W 900mA	220-240	97	43	30	2x / 4x	80	Undimmable
25 W 900mA	220-240	164	38	24,5	1x / 2x	80 / 60	DALI
48 W 900mA	220-240	110	75	25,7	3x / 4x	80 / 80	DALI
32 W 900mA	220-240	156	53	26	1x / 2x	90	DALI push, 0-10V, 1-10V
25 W 150-900mA	110-240	111	52	22	8x / 12x / 16x	100	DALI push, 0-10V, 1-10V

Code
<b>DV1002</b>
<b>DV1008</b>
<b>DV1004</b>
<b>DV1005</b>
<b>DV1006</b>
<b>DV1003</b>
<b>DV1007</b>
<b>M077401</b>
<b>DV1126</b>

# Sharp SMD










# Sharp SMD

## 1x - 2x - 4x



# SHARP SMD





Driver 24Vdc Selv and louvres supplied separately.


MacAdam 2SDCM  
Life L90 (17K) 103000h  
CRI >90



	Watt	Beam	Flux	CCT	Code
1 optic unit	3,5 W	SP 20°	189 lm	2700 K	<b>AF310.</b> 01/04/05
			201 lm	3000 K	<b>AF313.</b> 01/04/05
			215 lm	4000 K	<b>AF316.</b> 01/04/05
		XF 36°	177 lm	2700 K	<b>AF311.</b> 01/04/05
			188 lm	3000 K	<b>AF314.</b> 01/04/05
			201 lm	4000 K	<b>AF317.</b> 01/04/05
		WF 52°	183 lm	2700 K	<b>AF312.</b> 01/04/05
			195 lm	3000 K	<b>AF315.</b> 01/04/05
			208 lm	4000 K	<b>AF318.</b> 01/04/05
			377 lm	2700 K	<b>AF360.</b> 01/04/05
2 optic units	6,5 W	SP 20°	402 lm	3000 K	<b>AF363.</b> 01/04/05
			430 lm	4000 K	<b>AF366.</b> 01/04/05
			353 lm	2700 K	<b>AF361.</b> 01/04/05
		XF 36°	376 lm	3000 K	<b>AF364.</b> 01/04/05
			403 lm	4000 K	<b>AF367.</b> 01/04/05
			366 lm	2700 K	<b>AF362.</b> 01/04/05
		WF 52°	389 lm	3000 K	<b>AF365.</b> 01/04/05
			417 lm	4000 K	<b>AF368.</b> 01/04/05
			755 lm	2700 K	<b>AF410.</b> 01/04/05
			804 lm	3000 K	<b>AF413.</b> 01/04/05
4 optic units	12 W	SP 20°	860 lm	4000 K	<b>AF416.</b> 01/04/05
			706 lm	2700 K	<b>AF411.</b> 01/04/05
			752 lm	3000 K	<b>AF414.</b> 01/04/05
		XF 36°	805 lm	4000 K	<b>AF417.</b> 01/04/05
			731 lm	2700 K	<b>AF412.</b> 01/04/05
			779 lm	3000 K	<b>AF415.</b> 01/04/05
		WF 52°	834 lm	4000 K	<b>AF418.</b> 01/04/05

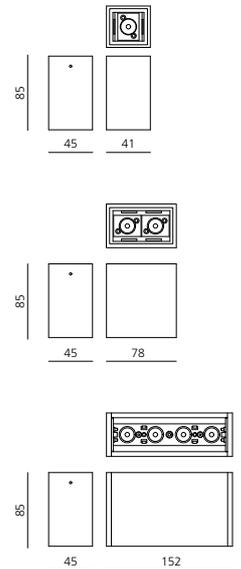

## Louvres

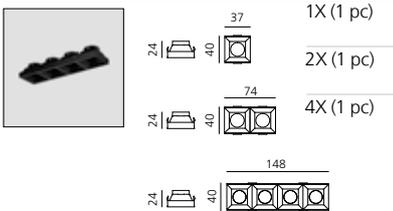

Code
<b>AF950.</b> 01/04
<b>AF951.</b> 01/04
<b>AF952.</b> 01/04


## Accessories



**Sharpening wall grazer lens Kit (4pcs)**  
26°x70° elliptical lenses kit. It has to be used on top of SP 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.

Code
<b>AF06000</b>

Driver	W	Vin (V)	Vout (V)	L mm	W mm	H mm	W max	Min Wire section mm <sup>2</sup>	Max wire length m	n°device			Dimming			Code
										1x 3,5W	2x 6,3W	4x 11,6W	DALI	1-10V	PUSH	
CV Selv	30	220-240 Vac	24Vdc	153	41	32	25	1.5	30	7	4	2	no	no	no	<b>DV1032</b>
CV Selv	75	220-240 Vac	24Vdc	180	52	30	63	1.5	30	18	10	5	no	no	no	<b>DV1009</b>
CV Selv	120	220-240 Vac	24Vdc	300	40	30	102	1.5	30	29	16	8	no	no	no	<b>DV1033</b>
Dimmer	NA	24Vdc	24Vdc PWM	80	54	24	max 100	1.5	30	see above			yes	yes	yes	<b>DV1048</b>

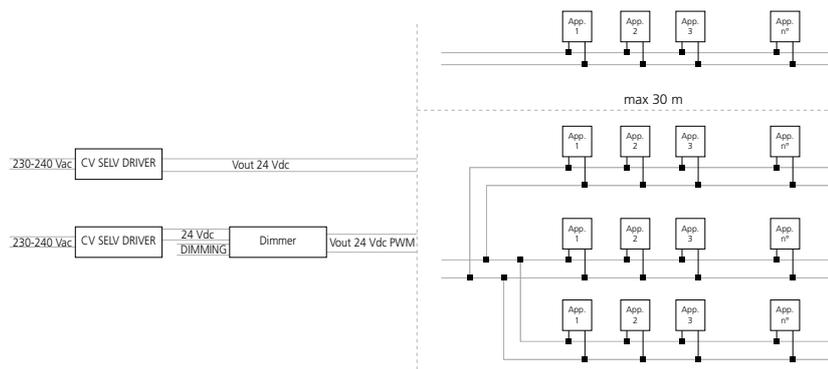


appliances number: see table





# Sharp SMD


## 8x - 12x - 16x

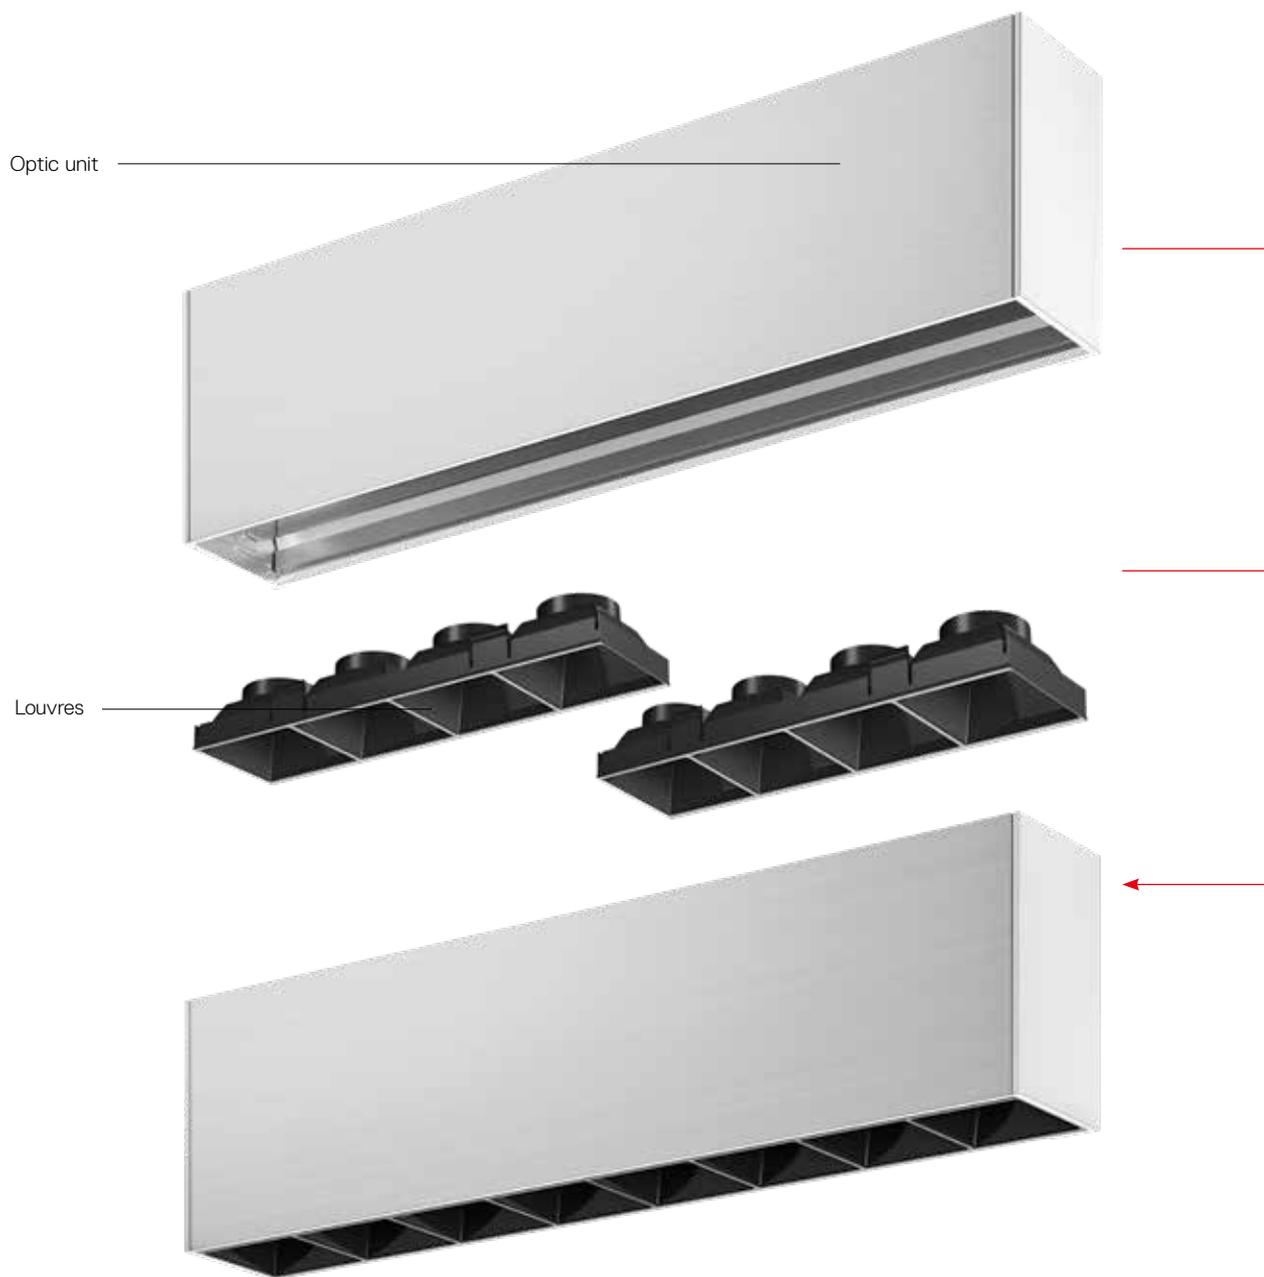


# SHARP SMD

White	Black	Silver	SP	XF	WF	MacAdam 2SDCM	IP20
						Life L90 (17K) 103000h	
01	04	05				CRI >90	

Optic units	Watt	Beam	Flux	CCT	Undimmable		Dimmable DALI		
					Code	Code	Code	Code	
8	24 W	SP 20°	1509 lm	2700 K	<b>AF457.</b>	01/04/05	<b>AF476.</b>	01/04/05	
			1608 lm	3000 K	<b>AF460.</b>	01/04/05	<b>AF470.</b>	01/04/05	
			1721 lm	4000 K	<b>AF463.</b>	01/04/05	<b>AF473.</b>	01/04/05	
		XF 36°	1412 lm	2700 K	<b>AF458.</b>	01/04/05	<b>AF477.</b>	01/04/05	
			1504 lm	3000 K	<b>AF461.</b>	01/04/05	<b>AF471.</b>	01/04/05	
			1610 lm	4000 K	<b>AF464.</b>	01/04/05	<b>AF474.</b>	01/04/05	
	WF 52°	1462 lm	2700 K	<b>AF459.</b>	01/04/05	<b>AF478.</b>	01/04/05		
		1558 lm	3000 K	<b>AF462.</b>	01/04/05	<b>AF472.</b>	01/04/05		
		1667 lm	4000 K	<b>AF465.</b>	01/04/05	<b>AF475.</b>	01/04/05		
	12	37 W	SP 20°	2263 lm	2700 K	<b>AF807.</b>	01/04/05	<b>AF826.</b>	01/04/05
				2412 lm	3000 K	<b>AF810.</b>	01/04/05	<b>AF820.</b>	01/04/05
				2581 lm	4000 K	<b>AF813.</b>	01/04/05	<b>AF823.</b>	01/04/05
XF 36°			2118 lm	2700 K	<b>AF808.</b>	01/04/05	<b>AF827.</b>	01/04/05	
			2256 lm	3000 K	<b>AF811.</b>	01/04/05	<b>AF821.</b>	01/04/05	
			2415 lm	4000 K	<b>AF814.</b>	01/04/05	<b>AF824.</b>	01/04/05	
WF 52°		2193 lm	2700 K	<b>AF809.</b>	01/04/05	<b>AF828.</b>	01/04/05		
		2337 lm	3000 K	<b>AF812.</b>	01/04/05	<b>AF822.</b>	01/04/05		
		2501 lm	4000 K	<b>AF815.</b>	01/04/05	<b>AF825.</b>	01/04/05		
16		47 W	SP 20°	3018 lm	2700 K	<b>AF857.</b>	01/04/05	<b>AF876.</b>	01/04/05
				3215 lm	3000 K	<b>AF860.</b>	01/04/05	<b>AF870.</b>	01/04/05
				3442 lm	4000 K	<b>AF863.</b>	01/04/05	<b>AF873.</b>	01/04/05
	XF 36°		2824 lm	2700 K	<b>AF858.</b>	01/04/05	<b>AF877.</b>	01/04/05	
			3009 lm	3000 K	<b>AF861.</b>	01/04/05	<b>AF871.</b>	01/04/05	
			3220 lm	4000 K	<b>AF864.</b>	01/04/05	<b>AF874.</b>	01/04/05	
	WF 52°	2924 lm	2700 K	<b>AF859.</b>	01/04/05	<b>AF878.</b>	01/04/05		
		3316 lm	3000 K	<b>AF862.</b>	01/04/05	<b>AF872.</b>	01/04/05		
		3335 lm	4000 K	<b>AF865.</b>	01/04/05	<b>AF875.</b>	01/04/05		

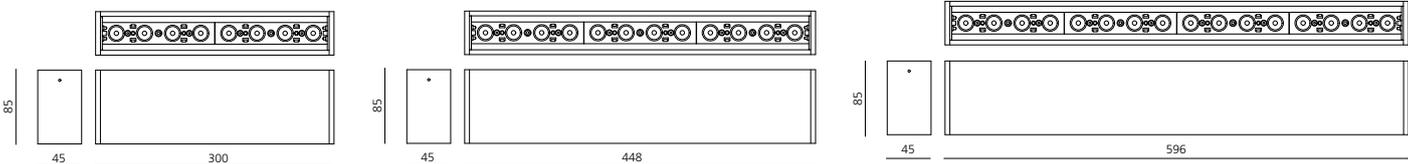

## Louvres



Code  
**AF952.** 01/04

## Accessories



**Sharpening wall grazer lens Kit (4pcs)**  
26°x70° elliptical lenses kit. It has to be used on top of SP 20° reflectors to get an elliptical beam (greater axis along the module length). It contains 4 lenses.

Code  
**AF06000**

# Sharp SMD wall washer



White  
White



01



Silver  
Black



05



White  
Black



54




Black  
Black



04


# SHARP SMD WALL WASHER

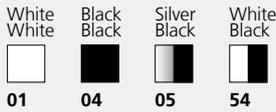


MacAdam 2SDCM IP20  
 Life L90 (17K) 103000h  
 CRI >90

Driver 24Vdc Selv a supplied separately.


	W	Flux	CCT	Code
1 optic unit	12 W	657 lm	2700 K	<b>AF419.</b> 01/04/05/54
		657 lm	3000 K	<b>AF420.</b> 01/04/05/54
		657 lm	4000 K	<b>AF421.</b> 01/04/05/54



Driver	W	Vin (V)	Vout (V)	L mm	W mm	H mm	W max	Min Wire section mm <sup>2</sup>	Max wire lenght m	n°device	Dimming	Code
CV Selv	30	220-240 Vac	24Vdc	153	41	32	25	1.5	30	2	DALI 1-10V PUSH 0-10V potentiom.	<b>DV1032</b>
CV Selv	75	220-240 Vac	24Vdc	180	52	30	63	1.5	30	3	no no no	<b>DV1009</b>
CV Selv	120	220-240 Vac	24Vdc	300	40	30	102	1.5	30	4	no no no	<b>DV1033</b>
Dimmer	NA	24Vdc	24Vdc PWM	80	54	24	max 100	1.5	30	see above	yes yes yes	<b>DV1048</b>

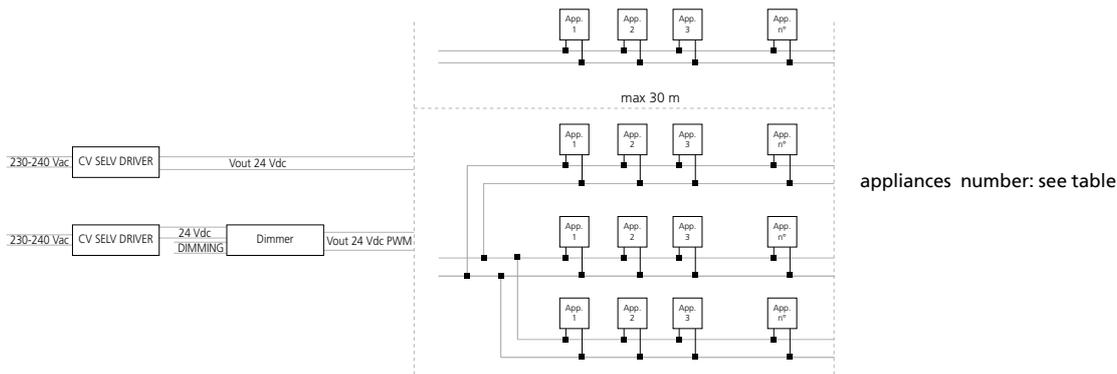

Electronic ballast included.				Undimmable		Dimmable DALI	
	W	Flux	CCT	Code	Code	Code	Code
2 optic units	22 W	1314 lm	2700 K	<b>AF466.</b> 01/04/05/54	<b>AF479.</b> 01/04/05/54		
		1314 lm	3000 K	<b>AF467.</b> 01/04/05/54	<b>AF480.</b> 01/04/05/54		
		1314 lm	4000 K	<b>AF468.</b> 01/04/05/54	<b>AF481.</b> 01/04/05/54		
3 optic units	33 W	1971 lm	2700 K	<b>AF816.</b> 01/04/05/54	<b>AF829.</b> 01/04/05/54		
		1971 lm	3000 K	<b>AF817.</b> 01/04/05/54	<b>AF830.</b> 01/04/05/54		
		1971 lm	4000 K	<b>AF818.</b> 01/04/05/54	<b>AF831.</b> 01/04/05/54		
4 optic units	44 W	2628 lm	2700 K	<b>AF866.</b> 01/04/05/54	<b>AF880.</b> 01/04/05/54		
		2628 lm	3000 K	<b>AF867.</b> 01/04/05/54	<b>AF881.</b> 01/04/05/54		
		2628 lm	4000 K	<b>AF868.</b> 01/04/05/54	<b>AF882.</b> 01/04/05/54		

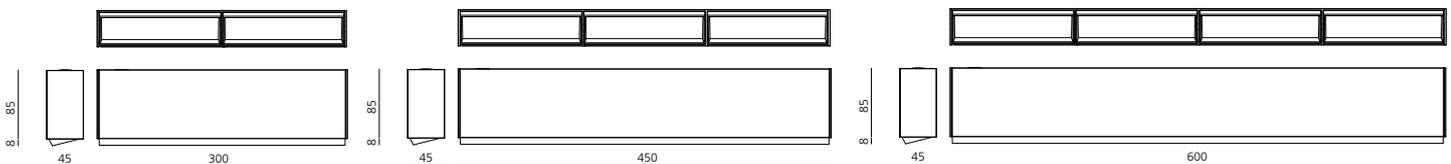

# Sharp Family is compatible with **Artemide App**

Artemide App is a user-friendly and intuitive interface used to control individual products, groups of appliances and lighting scenarios. It is a tool that can be associated with several products from both the Design and the Architectural Catalogues.





Download Artemide App  
and find more information on  
[artemide.com](http://artemide.com)

## Headquarters

### Artemide S.p.A.

Via Bergamo, 18  
20010 Pregnana Milanese (MI), Italy  
Tel. +39 02 93518.1  
Tel. +39 02 93526.1  
Numero verde 800 834 093  
(from Italy only)  
info@artemide.com  
artemide.com

## Communication and Marketing Department

Via Canova, 34  
20145 Milan (MI), Italy  
Tel. +39 02.349611  
marketing@artemide.com  
artemide.com

### Artemide S.p.A.

si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

### Artemide S.p.A.

reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

### Artemide S.p.A.

se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

### Artemide S.p.A.

behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildeten Produkte zu ändern.

### Artemide S.p.A.

se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálogo.

2025

For information regarding distributors and points of sale, please visit our website [artemide.com](http://artemide.com) or email: [info@artemide.com](mailto:info@artemide.com)



ISO 9001:2015



ISO 14001:2015



ISO 45001:2018