

Luminaire


Code AD02101
Name Picto 70 New led Verticale DIM Bianco 3000K flood

Measurem.

Code FTS1602984
Name Picto 70 New led Verticale DIM Bianco 3000K flood

Luminaire Flux	1752.60 lm	Luminaire Power	20.00 W	Efficacy	87.63 lm/W	Efficiency	100.00%
Lamps Flux	1752.60 lm	Maximum value	2008.61 cd/klm	Position	C=0.00 G=4.00	CG	Rotosymmetrical
Round Luminaire	Diam.	70 mm	Height	100 mm			
Round Luminous Area	Diam.	35 mm	Height	0 mm			
Horizontal Luminous Area	0.000962 m2		Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°		0.000233 m2		
Coordinate system	CG		Symmetry Type		Rotosymmetrical		
Date	29-08-2017		Maximum Gamma Angle		180		
Measurement Distance	0.00		Measurement Flux		1752.60 lm		
LED Flux=2046lm LED Power=17,5W Eff=85,66% EfcLed=117lm/W EfcLum=88lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	98	100	100	100	100		
F UTE	--				D DIN 5040	A60	
					B NBN	BZ 1	

Diam=70mm




Semipiani C

180.0 — 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

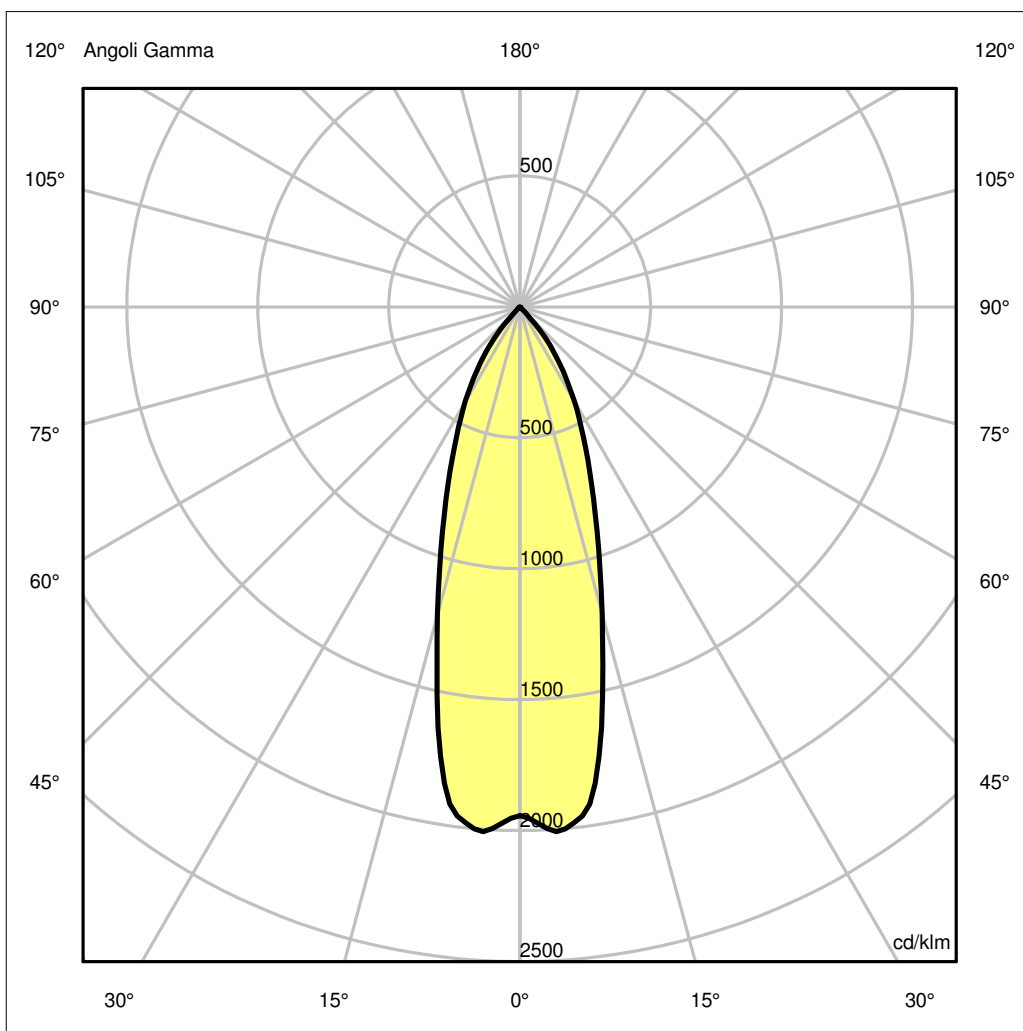

Luminaire

Code AD02101
Name Picto 70 New led Verticale DIM Bianco 3000K flood

Measurerm.


Code FTS1602984
Name Picto 70 New led Verticale DIM Bianco 3000K flood

Luminaire Flux	1752.60 lm	Luminaire Power	20.00 W	Efficacy	87.63 lm/W	Efficiency	100.00%
Lamps Flux	1752.60 lm	Maximum value	2008.61 cd/klm	Position	C=0.00 G=4.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	70 mm 35 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-08-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1752.60 lm	
LED Flux=2046lm LED Power=17,5W Eff=85,66% EfcLed=117lm/W EfcLum=88lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E. F UTE	98 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.32	0.63	0.95	1.27	1.58	OC	0.32	0.63	0.95	1.27	1.58
OB	0.32	0.63	0.95	1.27	1.58	OD	0.32	0.63	0.95	1.27	1.58

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3403.80	3506.51	2131.75	1038.91	463.68	31.96	6.02	3.86	2.60	1.23
OB	3403.80	3506.51	2131.75	1038.91	463.68	31.96	6.02	3.86	2.60	1.23
OC	3403.80	3506.51	2131.75	1038.91	463.68	31.96	6.02	3.86	2.60	1.23
OD	3403.80	3506.51	2131.75	1038.91	463.68	31.96	6.02	3.86	2.60	1.23

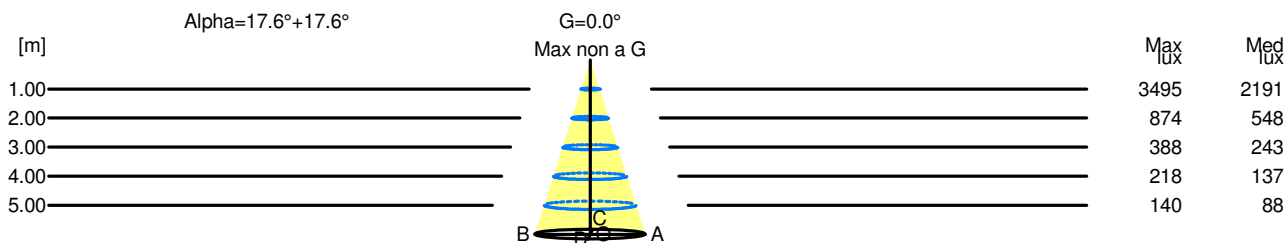

H[m]	D[m]	Max lux	Med lux	Alpha=17.6°+17.6°	G=0.0 Max non a G
1.00	0.63	3495	2191		
2.00	1.27	874	548		
3.00	1.90	388	243		
4.00	2.54	218	137		
5.00	3.17	140	88		