

Luminaire


Code AD06404
Name Picto 70 New led Orizzontale DIM Nero 4000K flood

Measurem.

Code FTS1603015
Name Picto 70 New led Orizzontale DIM Nero 4000K flood

Luminaire Flux	1805.71 lm	Luminaire Power	20.00 W	Efficacy	90.29 lm/W	Efficiency	100.00%
Lamps Flux	1805.71 lm	Maximum value	2008.61 cd/klm	Position	C=0.00 G=4.00	CG	Rotosymmetrical
Round Luminaire	Diam.	70 mm	Height	100 mm			
Round Luminous Area	Diam.	35 mm	Height	0 mm			
Horizontal Luminous Area	0.000962 m2	Emitting area on Plane 180°		0.000000 m2			
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2			
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000233 m2			
Coordinate system	CG	Symmetry Type		Rotosymmetrical			
Date	29-08-2017	Maximum Gamma Angle		180			
Measurement Distance	0.00	Measurement Flux		1805.71 lm			
LED Flux=2108lm LED Power=17,5W Eff=85,66% EfcLed=120lm/W EfcLum=90lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	98 100 100 100 100	D DIN 5040		A60			
F UTE	--	B NBN		BZ 1			

Diam=70mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

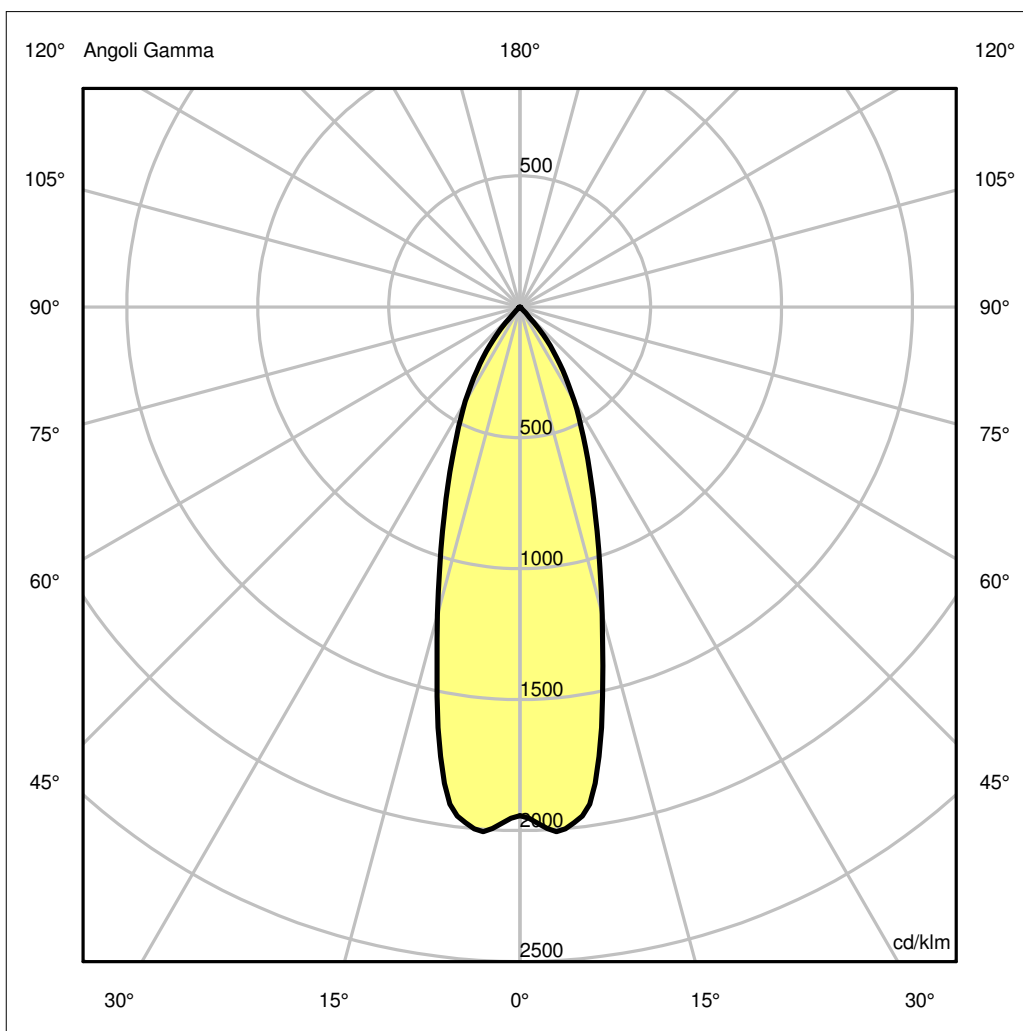

Luminaire

Code AD06404
Name Picto 70 New led Orizzontale DIM Nero 4000K flood

Measur.


Code FTS1603015
Name Picto 70 New led Orizzontale DIM Nero 4000K flood

Luminaire Flux	1805.71 lm	Luminaire Power	20.00 W	Efficacy	90.29 lm/W	Efficiency	100.00%
Lamps Flux	1805.71 lm	Maximum value	2008.61 cd/klm	Position	C=0.00 G=4.00	CG	Rotosymmetrical
Round Luminaire		Diam.	70 mm	Height	100 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-08-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1805.71 lm	
LED Flux=2108lm LED Power=17,5W Eff=85,66% EfcLed=120lm/W EfcLum=90lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.32	0.63	0.95	1.27	1.58	OC	0.32	0.63	0.95	1.27	1.58
OB	0.32	0.63	0.95	1.27	1.58	OD	0.32	0.63	0.95	1.27	1.58

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3506.95	3612.77	2196.35	1070.39	477.73	32.93	6.21	3.98	2.67	1.26
OB	3506.95	3612.77	2196.35	1070.39	477.73	32.93	6.21	3.98	2.67	1.26
OC	3506.95	3612.77	2196.35	1070.39	477.73	32.93	6.21	3.98	2.67	1.26
OD	3506.95	3612.77	2196.35	1070.39	477.73	32.93	6.21	3.98	2.67	1.26

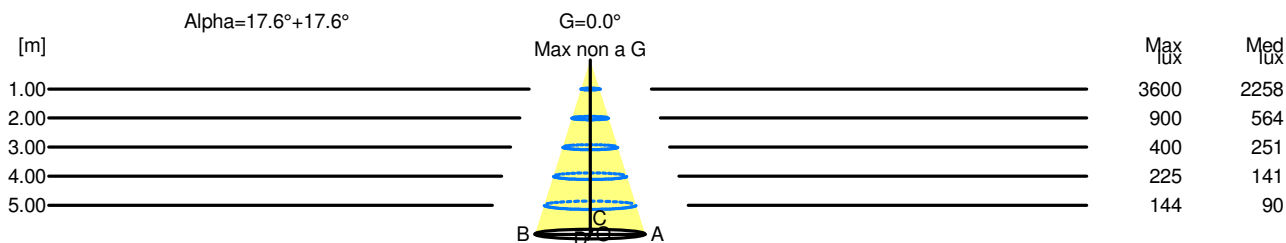

H[m]	D[m]	Max lux	Med lux	Alpha=17.6°+17.6°	G=0.0 Max non a G
1.00	0.63	3600	2258		
2.00	1.27	900	564		
3.00	1.90	400	251		
4.00	2.54	225	141		
5.00	3.17	144	90		