


Luminaire

Code 1945W10A
Name UNTERLINDEN T 2700K ALLUMINIO

Measurem.

Code FTS1702238-A
Name UNTERLINDEN T 2700K ALLUMINIO

Luminaire Flux	398 lm	Luminaire Power	9.0 W	Efficacy	44.222 lm/W	Efficiency	100.00%
Source Flux	398 lm	Maximum value	587.51 cd/klm	Position	C=0.00 G=9.00	CG	Sym. on planes 0-180
Round Luminaire		Diam.	118 mm	Height	100 mm		
Round Luminous Area		Diam.	45 mm	Height	0 mm		
Horizontal Luminous Area		0.001590 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000385 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		20-01-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		398 lm	
LED Flux=758lm LED Power=5.8W Eff=53% EfcLed=131lm/W EfcLum=44lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(19k)=105000h							
C.I.E.	71 93 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 2		

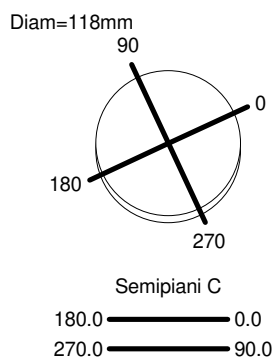

ULOR 0.03 %
DLOR 99.97 %
RN 0.03 %

