

Luminaire


Code AT22304+AT09506
Name A.39 SOSP DIR/IND 1482MM 840 ND NRO

Measurerm.

Code FTS1801089-A
Name A.39 SOSP DIR/IND 1482MM 840 ND NRO

| | | | | | | | |
|---|-----------------|-----------------|---------------|-----------------------------|-----------------|--------------------|--------------------|
| Luminaire Flux | 5116 lm | Luminaire Power | 45.0 W | Efficacy | 113.689 lm/W | Efficiency | 100.00% |
| Source Flux | 5116 lm | Maximum value | 209.50 cd/klm | Position | C=0.00 G=179.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 1482 mm | Width | 45 mm | Height | 85 mm |
| Rectangular Luminous Area | | Length | 1474 mm | Width | 40 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.058960 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.014264 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 30-01-2024 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 5116 lm | |
| LED Flux=7628lm LED Power=40W Eff=67% EfcLed=193lm/W EfcLum=114lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h | | | | | | | |
| C.I.E. | 50 81 96 46 100 | | | D DIN 5040 | | C32 | |
| F UTE | 0.46 E + 0.54 T | | | B NBN | | BZ 4 | |

1482mm x 45mm




Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 53.53 %

DLOR 46.47 %

RN 53.53 %

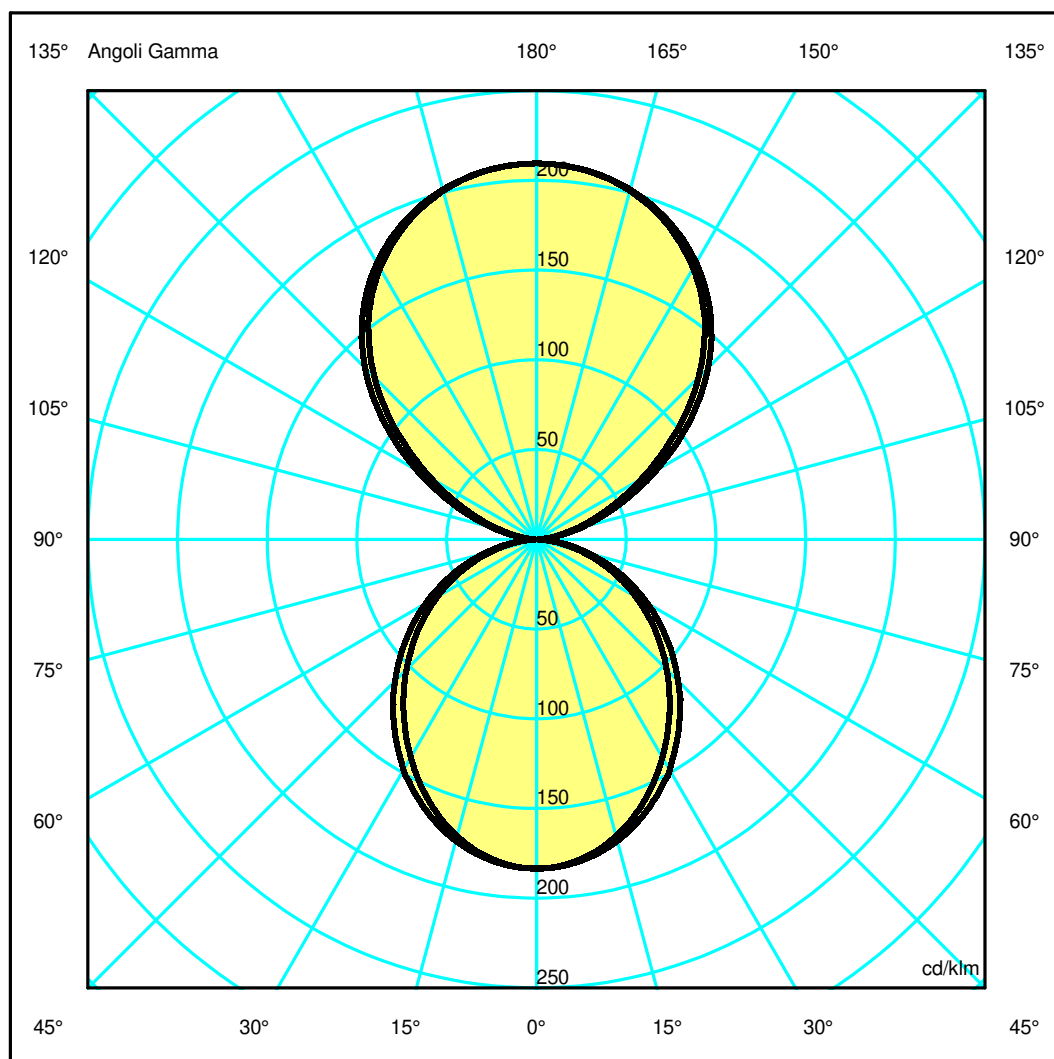

Luminaire

Code AT22304+AT09506
Name A.39 SOSP DIR/IND 1482MM 840 ND NRO

Measurem.

Code FTS1801089-A
Name A.39 SOSP DIR/IND 1482MM 840 ND NRO

| | | | | | | | |
|----------------------------|---------|-----------------|---------------|-----------------------------|-----------------|--------------------|--------------------|
| Luminaire Flux | 5116 lm | Luminaire Power | 45.0 W | Efficacy | 113.689 lm/W | Efficiency | 100.00% |
| Source Flux | 5116 lm | Maximum value | 209.50 cd/klm | Position | C=0.00 G=179.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 1482 mm | Width | 45 mm | Height | 85 mm |
| Rectangular Luminous Area | | Length | 1474 mm | Width | 40 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.058960 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.014264 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 30-01-2024 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 5116 lm | |


LED Flux=7628lm LED Power=40W Eff=67% EfcLed=193lm/W EfcLum=114lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

| | | | |
|--------|-----------------|------------|------|
| C.I.E. | 50 81 96 46 100 | D DIN 5040 | C32 |
| F UTE | 0.46 E + 0.54 T | B NBN | BZ 4 |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 1.23 | 2.45 | 3.68 | 4.90 | 6.13 | OC | 1.33 | 2.66 | 3.99 | 5.32 | 6.65 |
| OB | 1.23 | 2.45 | 3.68 | 4.90 | 6.13 | OD | 1.33 | 2.66 | 3.99 | 5.32 | 6.65 |

| | | | | | | | | | | |
|----|--------------------------------|---------|---------|--------|--------|--------|--------|--------|--------|-------|
| | Luminous Intensities [cd/klm] | | | | | | | | | |
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 1071.78 | 1066.64 | 1028.82 | 947.85 | 824.39 | 652.61 | 448.27 | 255.46 | 110.98 | 16.96 |
| OB | 1071.78 | 1066.64 | 1028.82 | 947.85 | 824.39 | 652.61 | 448.27 | 255.46 | 110.98 | 16.96 |
| OC | 1071.78 | 1067.31 | 1032.11 | 960.73 | 848.35 | 691.95 | 496.29 | 296.05 | 134.66 | 26.12 |
| OD | 1071.78 | 1067.31 | 1032.11 | 960.73 | 848.35 | 691.95 | 496.29 | 296.05 | 134.66 | 26.12 |

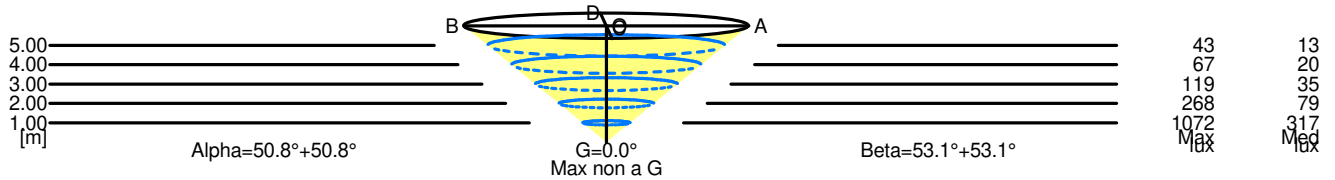

| | | | | | |
|------|-------|---------|---------|-------------------|-----------------------|
| 5.00 | 12.26 | 43 | 13 | | |
| 4.00 | 9.81 | 67 | 20 | | |
| 3.00 | 7.35 | 119 | 35 | | |
| 2.00 | 4.90 | 268 | 79 | | |
| 1.00 | 2.45 | 1072 | 317 | | |
| H[m] | D[m] | Max lux | Med lux | Alpha=50.8°+50.8° | Max non a G G=0.0° |

| | | | | | |
|------|-------|---------|---------|------------------|-----------------------|
| 5.00 | 13.31 | 43 | 13 | | |
| 4.00 | 10.65 | 67 | 20 | | |
| 3.00 | 7.98 | 119 | 35 | | |
| 2.00 | 5.32 | 268 | 79 | | |
| 1.00 | 2.66 | 1072 | 317 | | |
| H[m] | D[m] | Max lux | Med lux | Beta=53.1°+53.1° | Max non a G G=0.0° |