

## Luminaire

Code AD64405  
Name PICTO 125 RECESSED FL HF 940 SILVER

## Measurem.

Code FTS1701962  
Name PICTO 125 RECESSED FL HF 940 SILVER

Luminaire Flux	5870.75 lm	Luminaire Power	60.00 W	Efficacy	97.85 lm/W	Efficiency	100.00%
Sources Flux	5870.75 lm	Maximum value	1941.09 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	126 mm	Height	135 mm		
Round Luminous Area		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area		0.007854 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001900 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-01-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5870.75 lm	
LED Flux=7811lm LED Power=60W Eff=75% EfcLed=129lm/W EfcLum=97lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	92 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=126mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

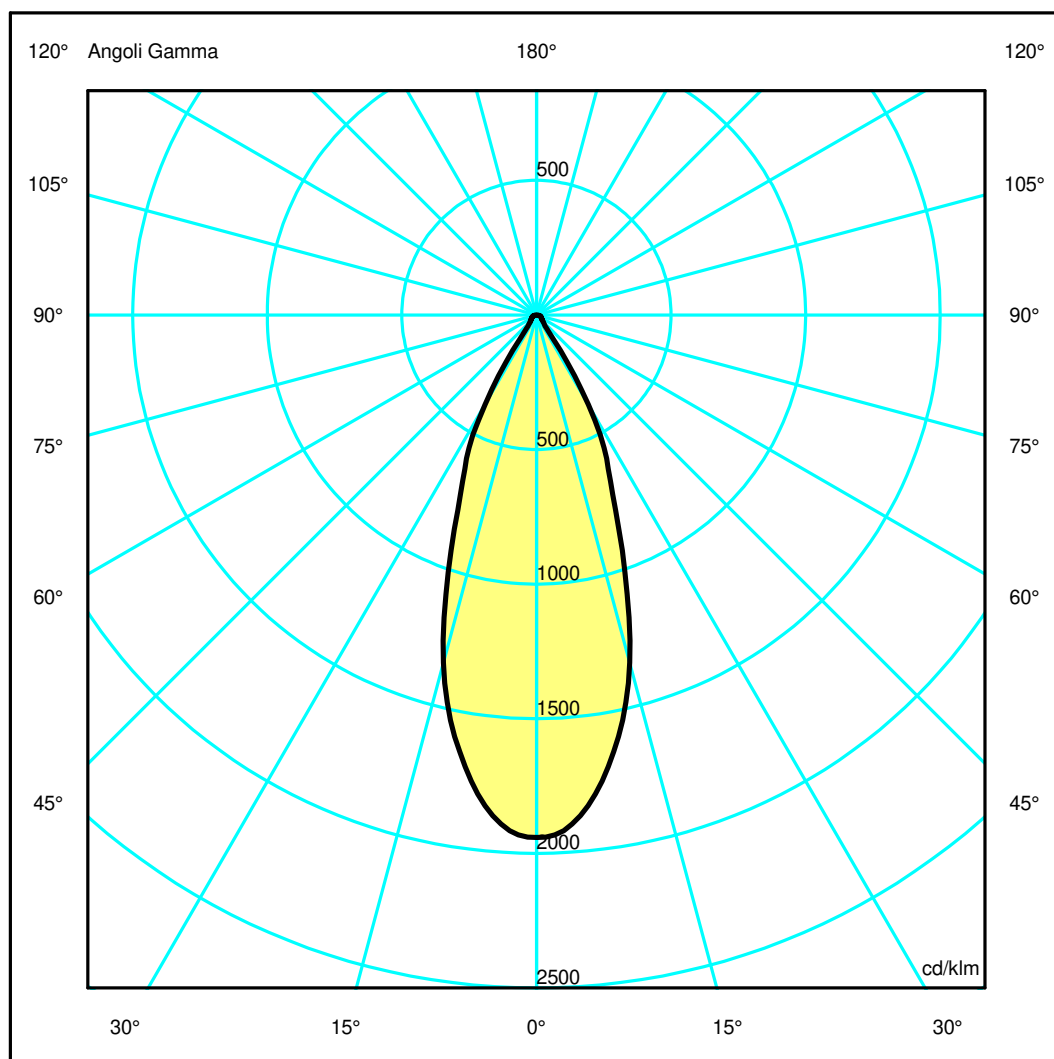

## Luminaire

Code AD64405  
Name PICTO 125 RECESSED FL HF 940 SILVER

## Measurem.


Code FTS1701962  
Name PICTO 125 RECESSED FL HF 940 SILVER

Luminaire Flux	5870.75 lm	Luminaire Power	60.00 W	Efficacy	97.85 lm/W	Efficiency	100.00%
Sources Flux	5870.75 lm	Maximum value	1941.09 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	126 mm	Height	135 mm		
Round Luminous Area		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area		0.007854 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001900 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		18-01-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5870.75 lm	
LED Flux=7811lm LED Power=60W Eff=75% EfcLed=129lm/W EfcLum=97lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	92 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.35	0.71	1.06	1.42	1.77	OC	0.35	0.71	1.06	1.42	1.77
OB	0.35	0.71	1.06	1.42	1.77	OD	0.35	0.71	1.06	1.42	1.77

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	11395.63	10958.50	7849.02	3704.04	660.08	192.31	135.54	108.45	83.50	29.60
OB	11395.63	10958.50	7849.02	3704.04	660.08	192.31	135.54	108.45	83.50	29.60
OC	11395.63	10958.50	7849.02	3704.04	660.08	192.31	135.54	108.45	83.50	29.60
OD	11395.63	10958.50	7849.02	3704.04	660.08	192.31	135.54	108.45	83.50	29.60

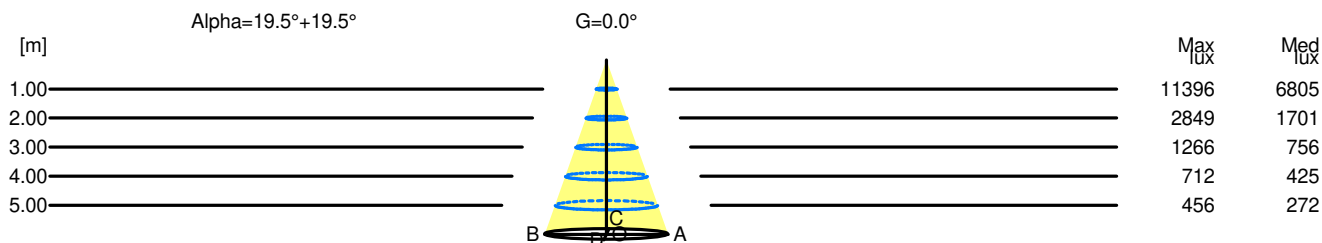

H[m]	D[m]	Max lux	Med lux	Alpha=19.5°+19.5°	G=0.0
1.00	0.71	11396	6805		
2.00	1.42	2849	1701		
3.00	2.12	1266	756		
4.00	2.83	712	425		
5.00	3.54	456	272		