







DALI/0-10V/1-10V/PUSH DART INTERFACE


design
C. de Bevilacqua

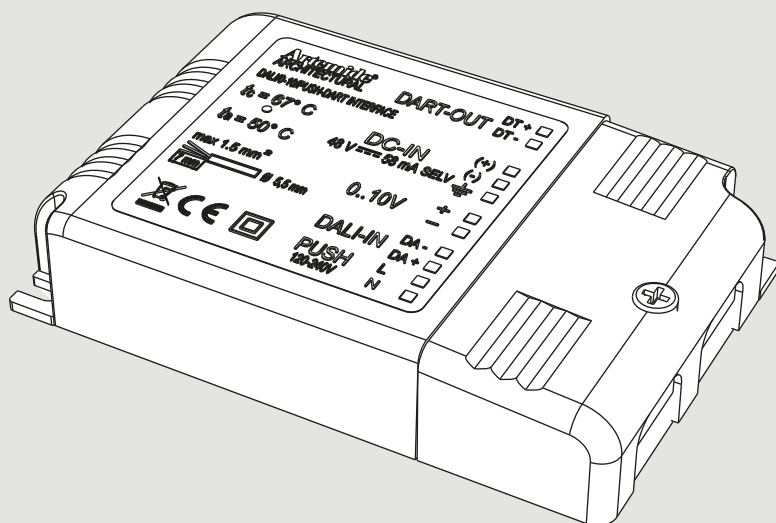


POSITION OF INSTRUCTION SHEET

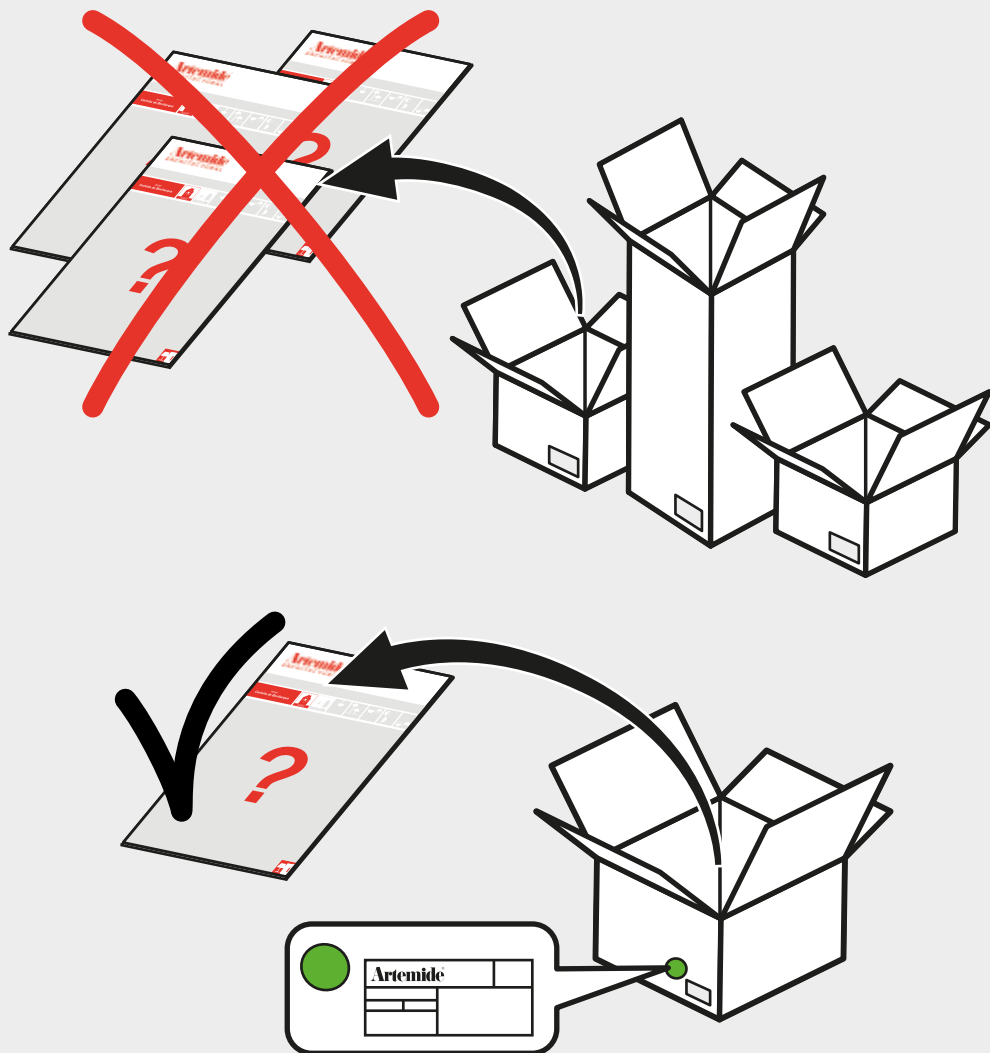

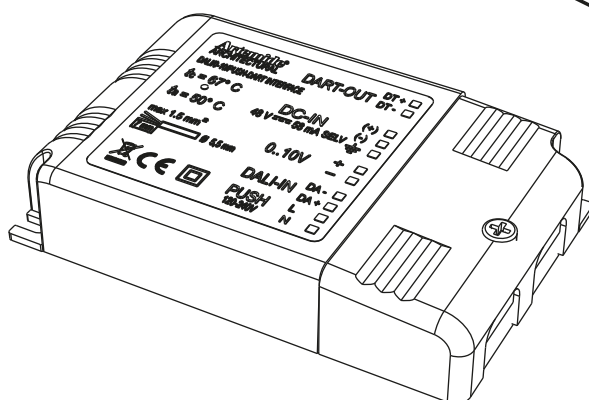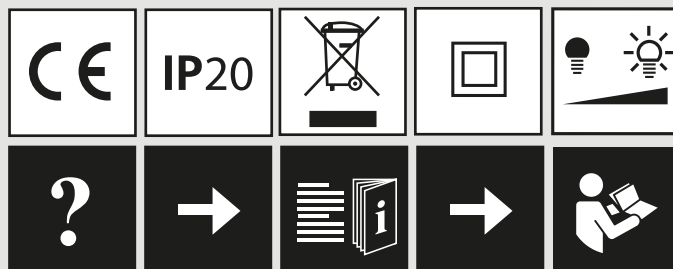


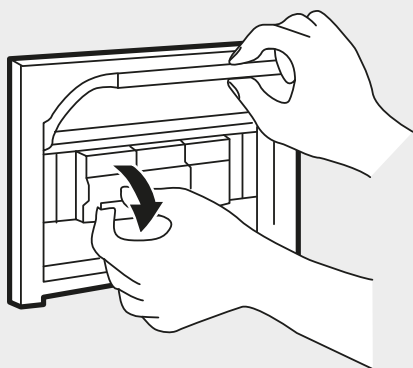


i

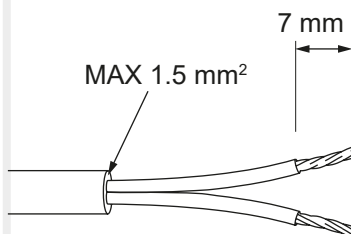

1

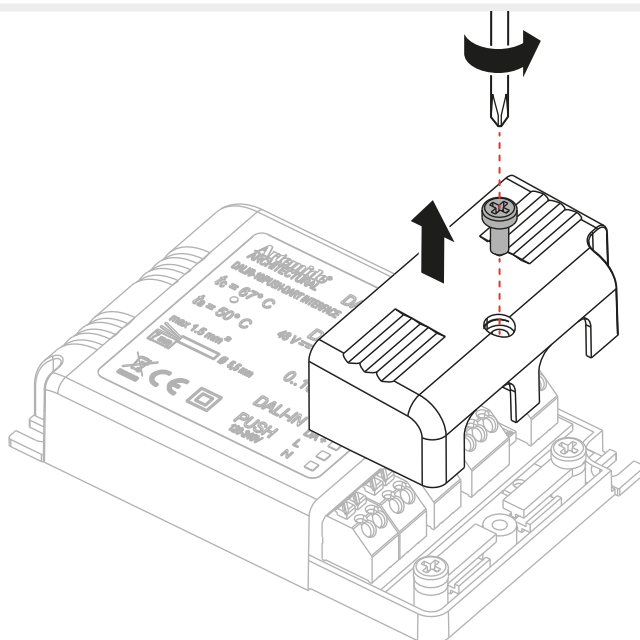


2a

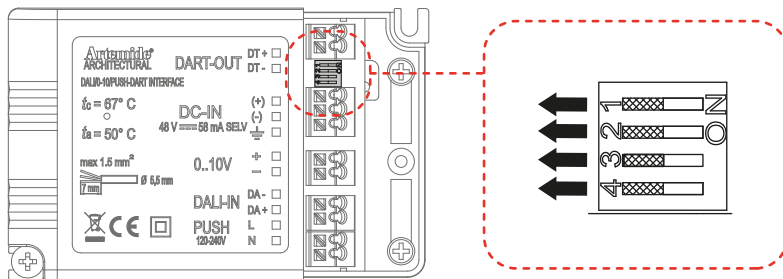


3a

MAX 64 DART ADDRESSES

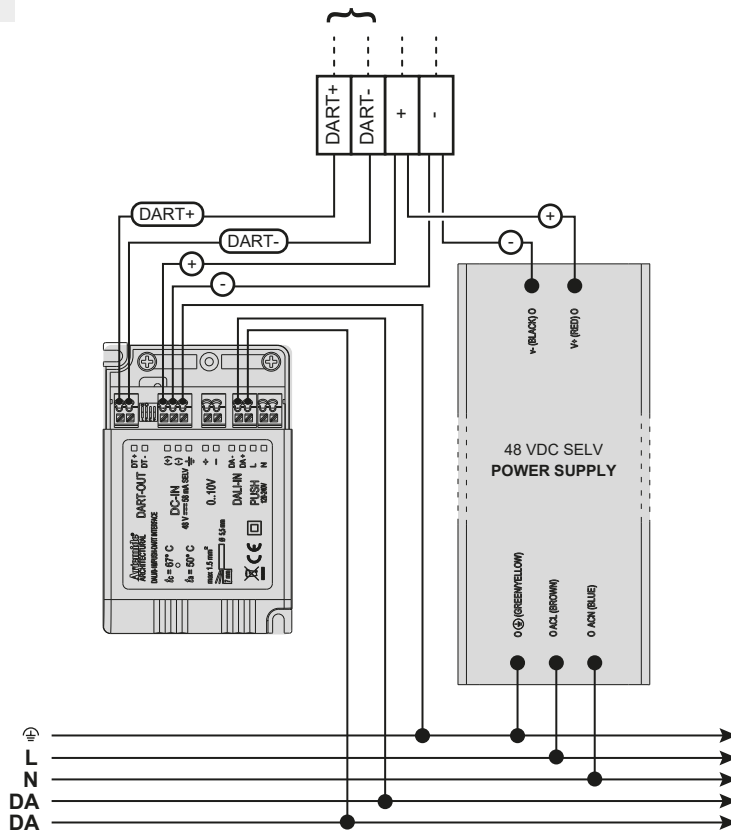


2b

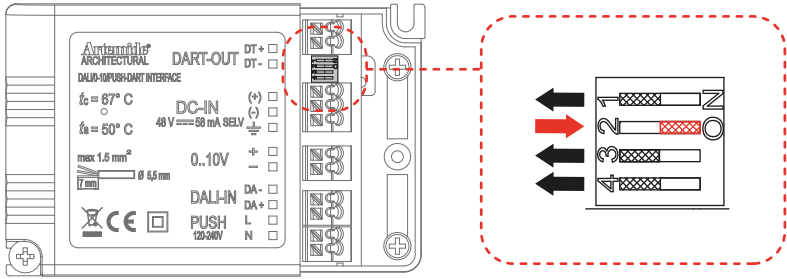


3b

MAX 64 BROADCAST DART ADDRESSES

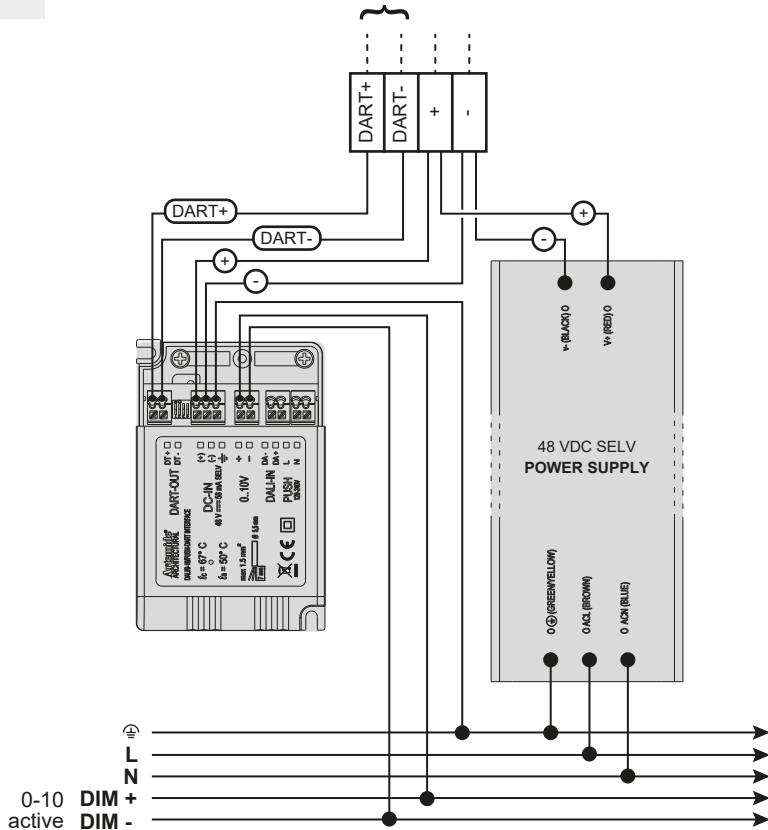


2c

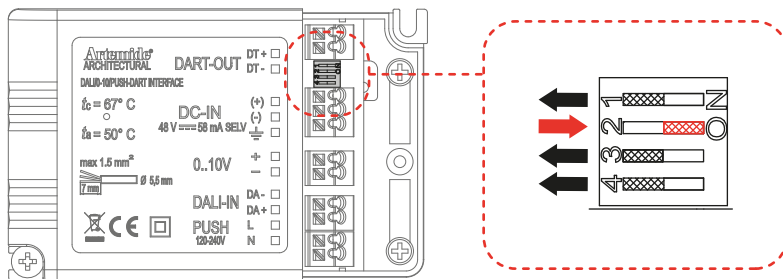

3c


MAX 64 BROADCAST DART ADDRESSES

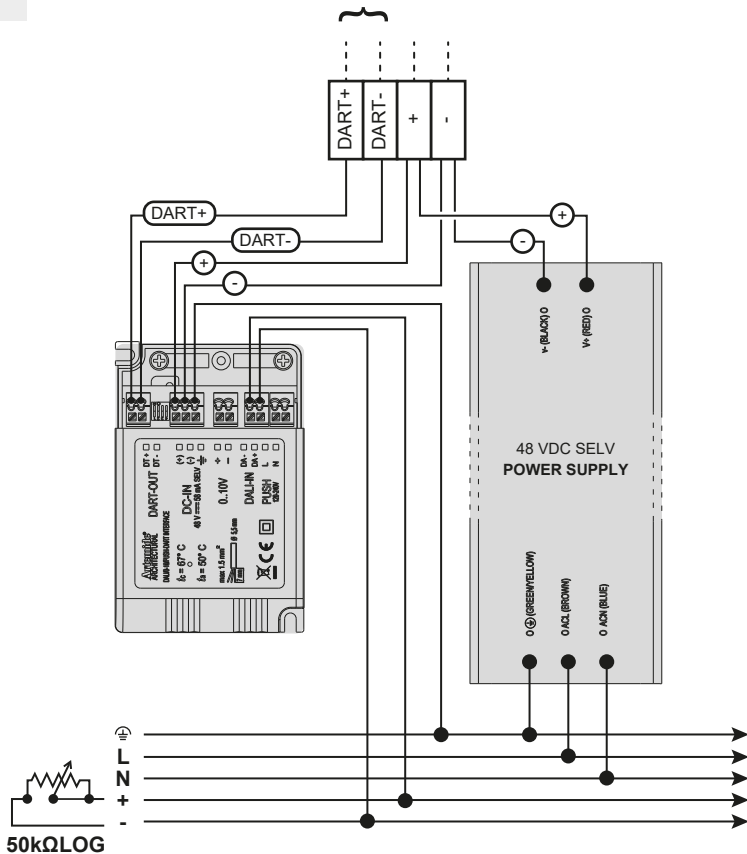

2d




1-10V

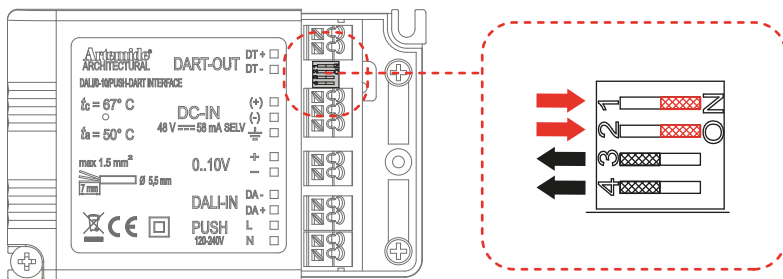


3d

MAX 64 BROADCAST DART ADDRESSES

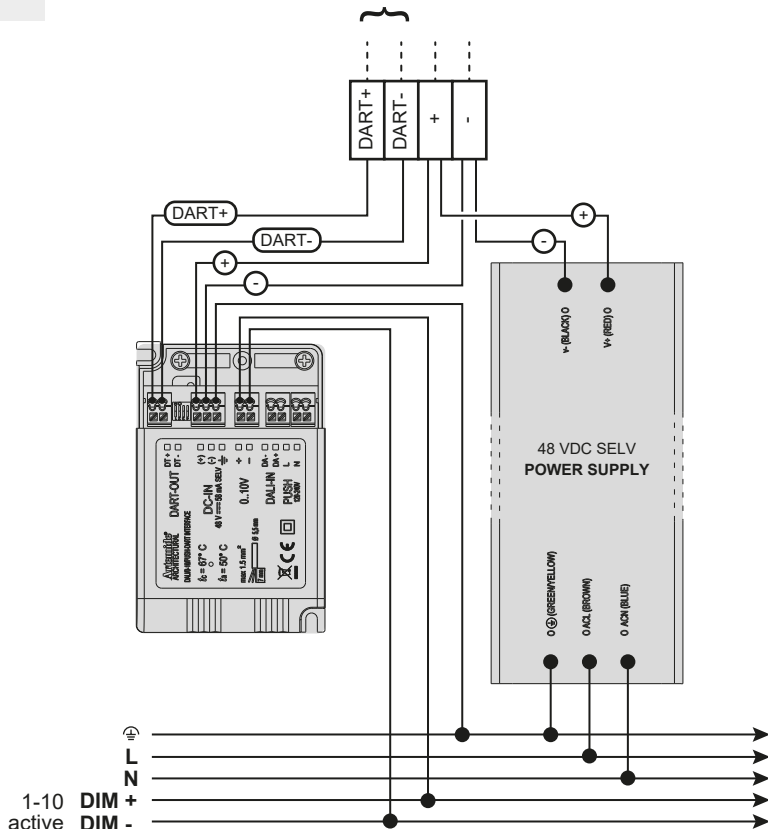


2e

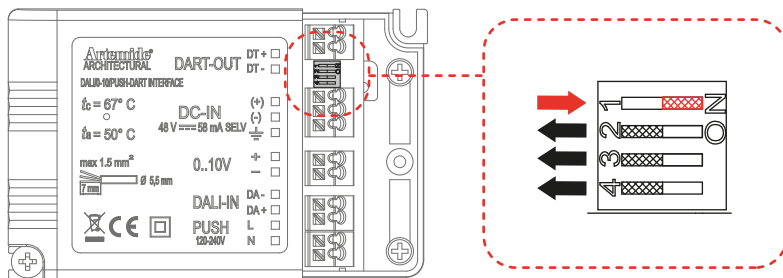


3e

MAX 64 BROADCAST DART ADDRESSES

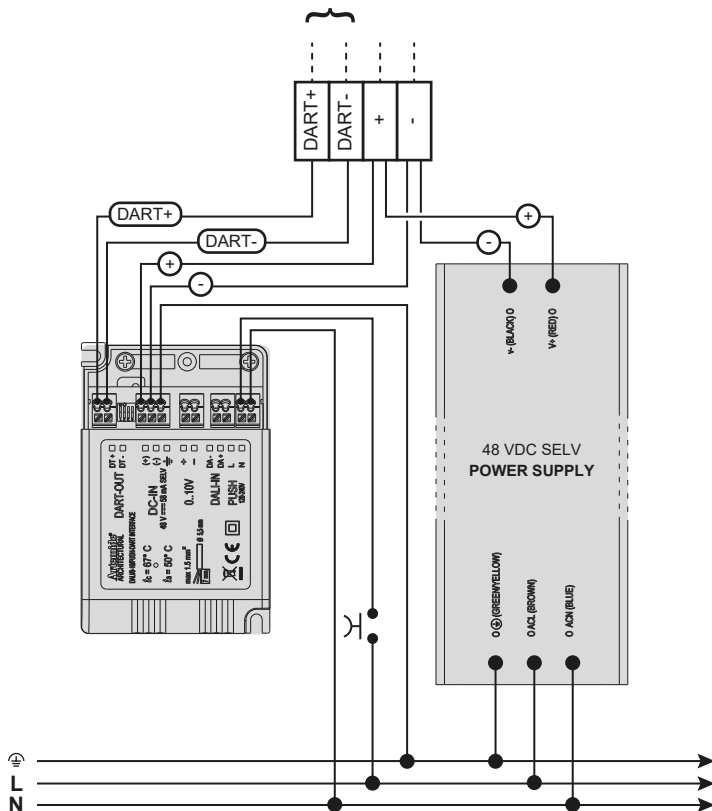



2f

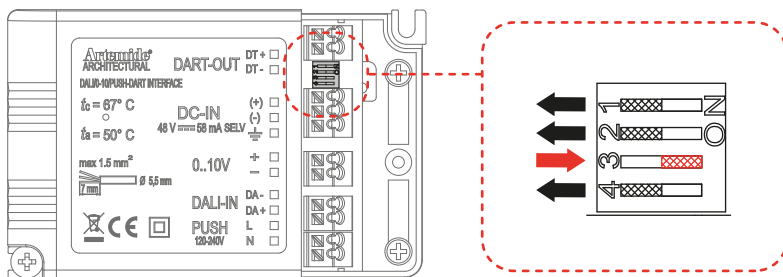

3f

MAX 64 BROADCAST DART ADDRESSES

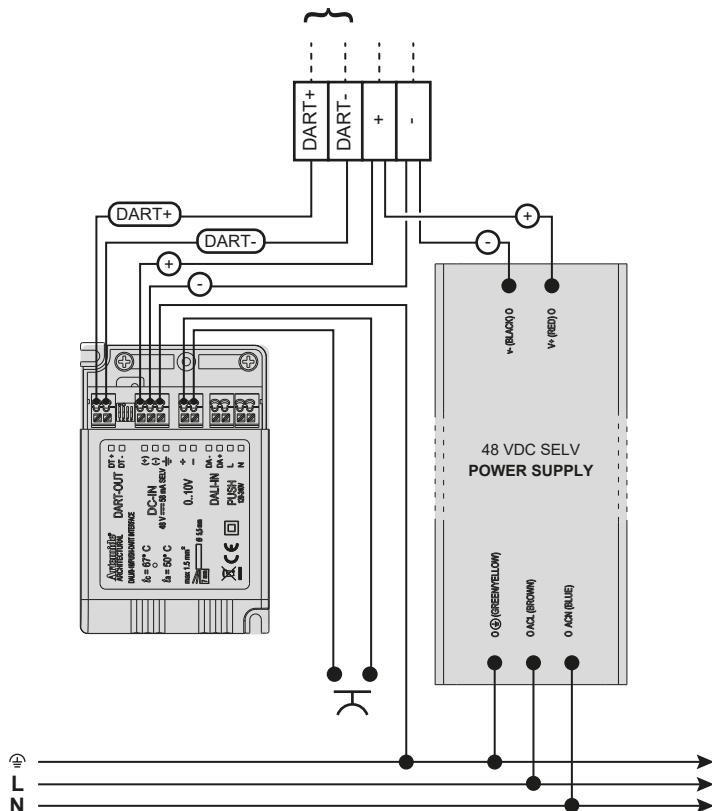

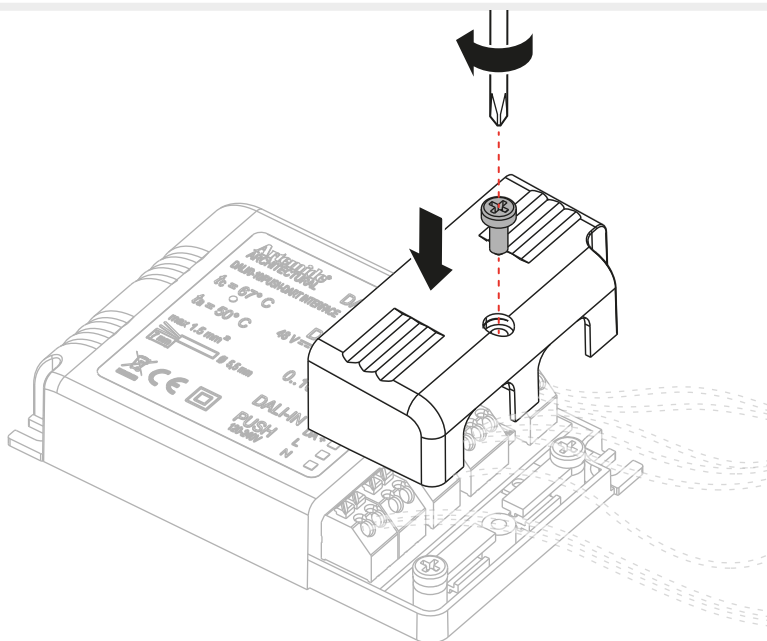

Insulation between circuits


Reinforced insulation between Push Button to SELV/DART-OUT

Supplementary insulation between DALI-IN to SELV/DART-OUT

Supplementary insulation between 0-10 V control to SELV/DART-OUT

Basic insulation between Push Button to DALI-IN/0-10V control

No insulation between DALI-IN to 0-10V control (only one of these controls can be connected to the dimming)



Artemide Spa

via Bergamo, 18
20010 Pregnana M.se (MI)
ITALIA

Tel. +39 02 935 181
Fax +39 02 935 90 254
Fax +39 02 935 90 496

www.artemide.com

VAT IT00846890150