

Luminaire


Code AP15320
Name VECTOR 55 MAGNET 940 WF DALI BR.BRONZE

Measurem.

Code FTS1800197-B
Name VECTOR 55 MAGNET 940 WF DALI BR.BRONZE

Luminaire Flux	2032 lm	Luminaire Power	19.0 W	Efficacy	106.947 lm/W	Efficiency	100.00%
Source Flux	2032 lm	Maximum value	3385.66 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	48 mm	Height	0 mm		
Horizontal Luminous Area		0.001810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000438 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		26-01-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2032 lm	
LED Flux=2694lm LED Power=17W Eff=75% EfcLed=155lm/W EfcLum=107lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)>=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

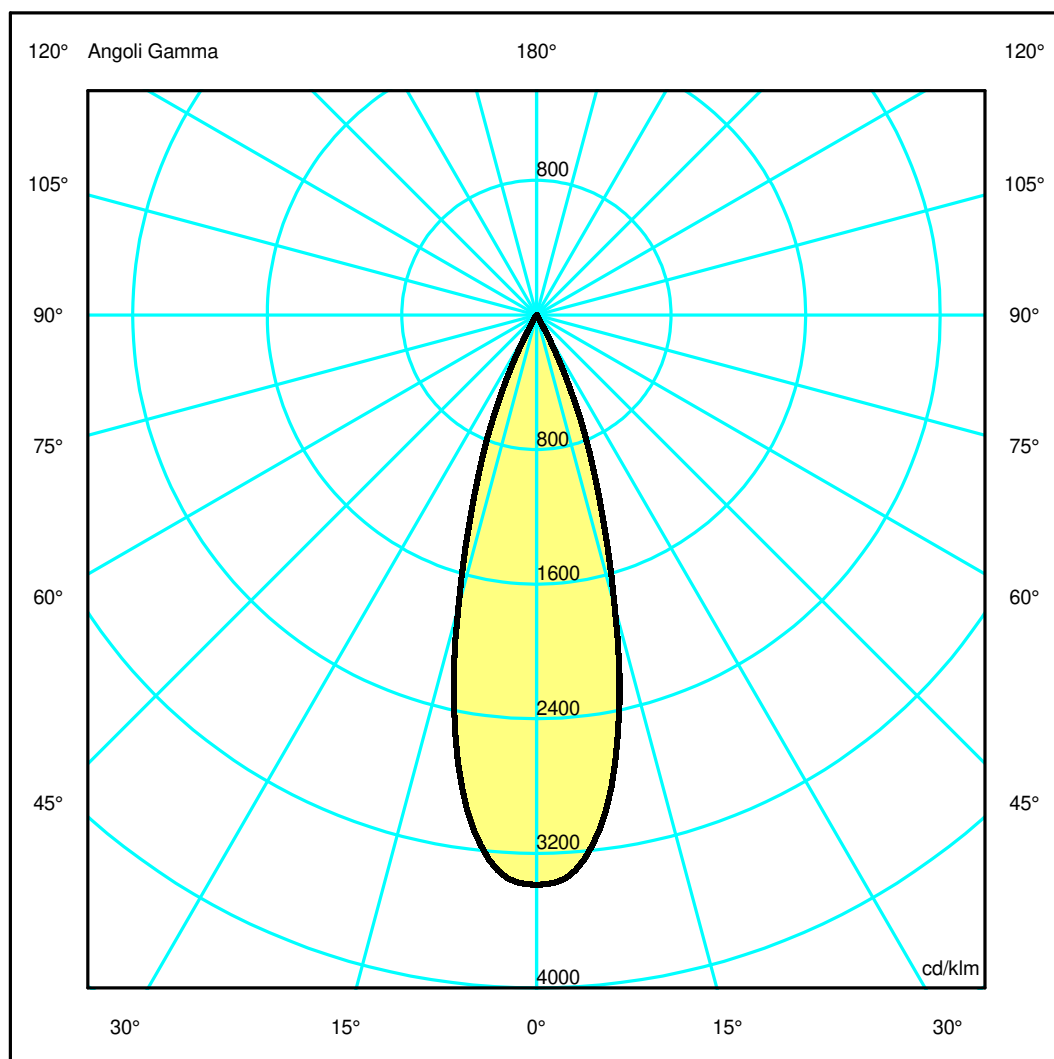

Luminaire

Code AP15320
Name VECTOR 55 MAGNET 940 WF DALI BR.BRONZE

Measurem.


Code FTS1800197-B
Name VECTOR 55 MAGNET 940 WF DALI BR.BRONZE

Luminaire Flux	2032 lm	Luminaire Power	19.0 W	Efficacy	106.947 lm/W	Efficiency	100.00%
Source Flux	2032 lm	Maximum value	3385.66 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	48 mm	Height	0 mm		
Horizontal Luminous Area		0.001810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000438 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		26-01-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2032 lm	
LED Flux=2694lm LED Power=17W Eff=75% EfcLed=155lm/W EfcLum=107lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)>=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.28	0.56	0.84	1.11	1.39	OC	0.28	0.56	0.84	1.11	1.39
OB	0.28	0.56	0.84	1.11	1.39	OD	0.28	0.56	0.84	1.11	1.39

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6879.67	6599.05	3646.04	876.07	22.61	6.75	2.99	1.83	1.11	0.45
OB	6879.67	6599.05	3646.04	876.07	22.61	6.75	2.99	1.83	1.11	0.45
OC	6879.67	6599.05	3646.04	876.07	22.61	6.75	2.99	1.83	1.11	0.45
OD	6879.67	6599.05	3646.04	876.07	22.61	6.75	2.99	1.83	1.11	0.45

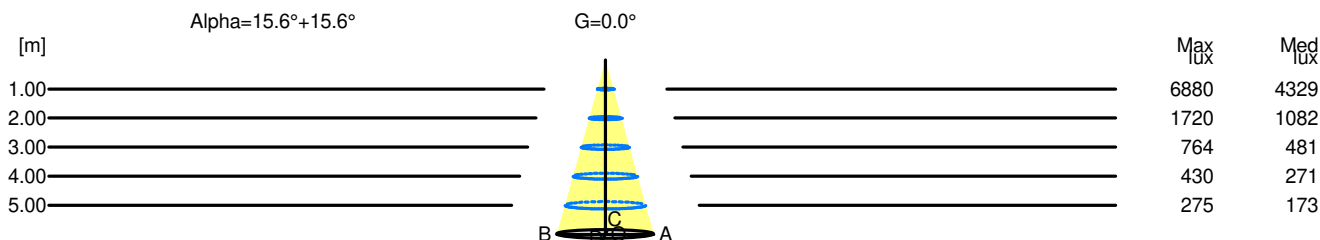

H[m]	D[m]	Max lux	Med lux	Alpha=15.6°+15.6°	G=0.0
1.00	0.56	6880	4329		
2.00	1.11	1720	1082		
3.00	1.67	764	481		
4.00	2.23	430	271		
5.00	2.78	275	173		