

Luminaire


Code AD07101
Name Picto 70 NEWTK New led Orizzontale DIM Bianco 3000K flood

Measurem.

Code FTS1800054
Name Picto 70 NEWTK New led Orizzontale DIM Bianco 3000K flood

Luminaire Flux	1752.60 lm	Luminaire Power	20.00 W	Efficacy	87.63 lm/W	Efficiency	100.00%
Lamps Flux	1752.60 lm	Maximum value	2008.61 cd/klm	Position	C=0.00 G=4.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 70 mm Diam. 35 mm	Height 100 mm Height 0 mm					
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000962 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000233 m2				
Coordinate system Date Measurement Distance	CG 29-08-2017 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1752.60 lm				
LED Flux=2046lm LED Power=17,5W Eff=85,66% EfcLed=117lm/W EfcLum=88lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E. F UTE	98 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				


Diam=70mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

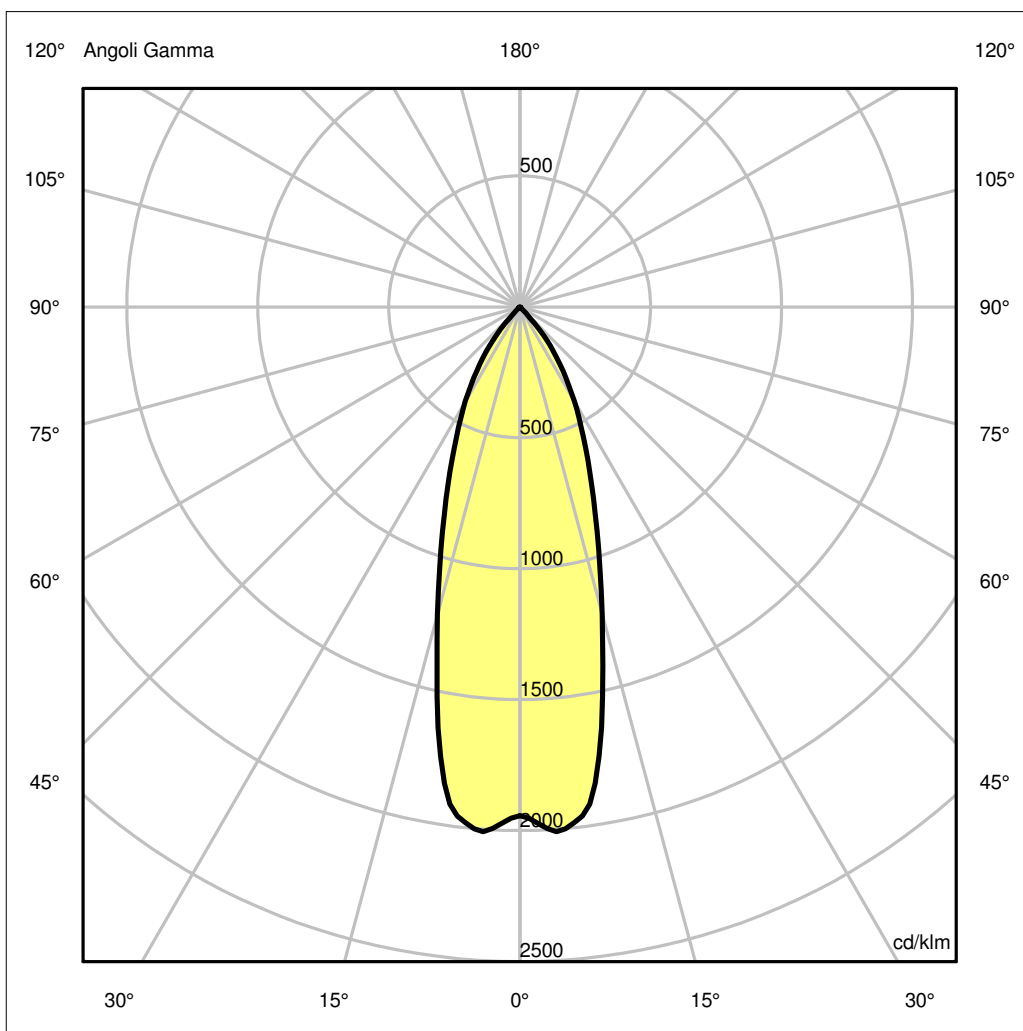

Luminaire


Code AD07101
Name Picto 70 NEWTK New led Orizzontale DIM Bianco 3000K flood
Measurem.
Code FTS1800054
Name Picto 70 NEWTK New led Orizzontale DIM Bianco 3000K flood

Luminaire Flux	1752.60 lm	Luminaire Power	20.00 W	Efficacy	87.63 lm/W	Efficiency	100.00%
Lamps Flux	1752.60 lm	Maximum value	2008.61 cd/klm	Position	C=0.00 G=4.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	70 mm 35 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.000962 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000233 m2	
Coordinate system Date Measurement Distance		CG 29-08-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1752.60 lm	
LED Flux=2046lm LED Power=17,5W Eff=85,66% EfcLed=117lm/W EfcLum=88lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E. F UTE	98 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.32	0.63	0.95	1.27	1.58	OC	0.32	0.63	0.95	1.27	1.58
OB	0.32	0.63	0.95	1.27	1.58	OD	0.32	0.63	0.95	1.27	1.58

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3403.80	3506.51	2131.75	1038.91	463.68	31.96	6.02	3.86	2.60	1.23
OB	3403.80	3506.51	2131.75	1038.91	463.68	31.96	6.02	3.86	2.60	1.23
OC	3403.80	3506.51	2131.75	1038.91	463.68	31.96	6.02	3.86	2.60	1.23
OD	3403.80	3506.51	2131.75	1038.91	463.68	31.96	6.02	3.86	2.60	1.23

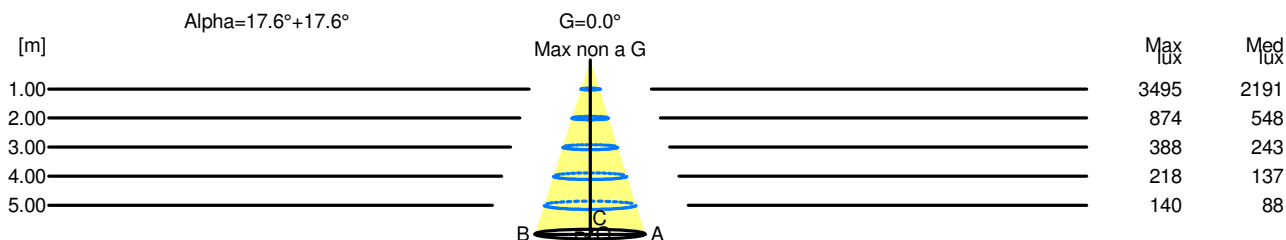

H[m]	D[m]	Max lux	Med lux	Alpha=17.6°+17.6°	G=0.0 Max non a G
1.00	0.63	3495	2191		
2.00	1.27	874	548		
3.00	1.90	388	243		
4.00	2.54	218	137		
5.00	3.17	140	88		