

Luminaire

Code AD07201
Name Picto 70 NEWTK New led Orizzontale DIM Bianco 3000K wide flood

Measurem.

Code FTS1800056
Name Picto 70 NEWTK New led Orizzontale DIM Bianco 3000K wide flood

Luminaire Flux	1779.82 lm	Luminaire Power	20.00 W	Efficacy	88.99 lm/W	Efficiency	100.00%
Lamps Flux	1779.82 lm	Maximum value	1580.38 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 70 mm Diam. 35 mm	Height 100 mm Height 0 mm					
Horizontal Luminous Area	0.000962 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.000233 m2
Coordinate system	CG	Symmetry Type	Maximum Gamma Angle	Measurement Flux	180	1779.82 lm	
Date	29-08-2017						
Measurement Distance	0.00						
LED Flux=2046lm LED Power=17,5W Eff=86,99% EfcLed=117lm/W EfcLum=89lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	97 99 100 100 100	D DIN 5040	A60				
F UTE	1.00 A	B NBN	BZ 1				


Diam=70mm



Semipiani C

180.0 — 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

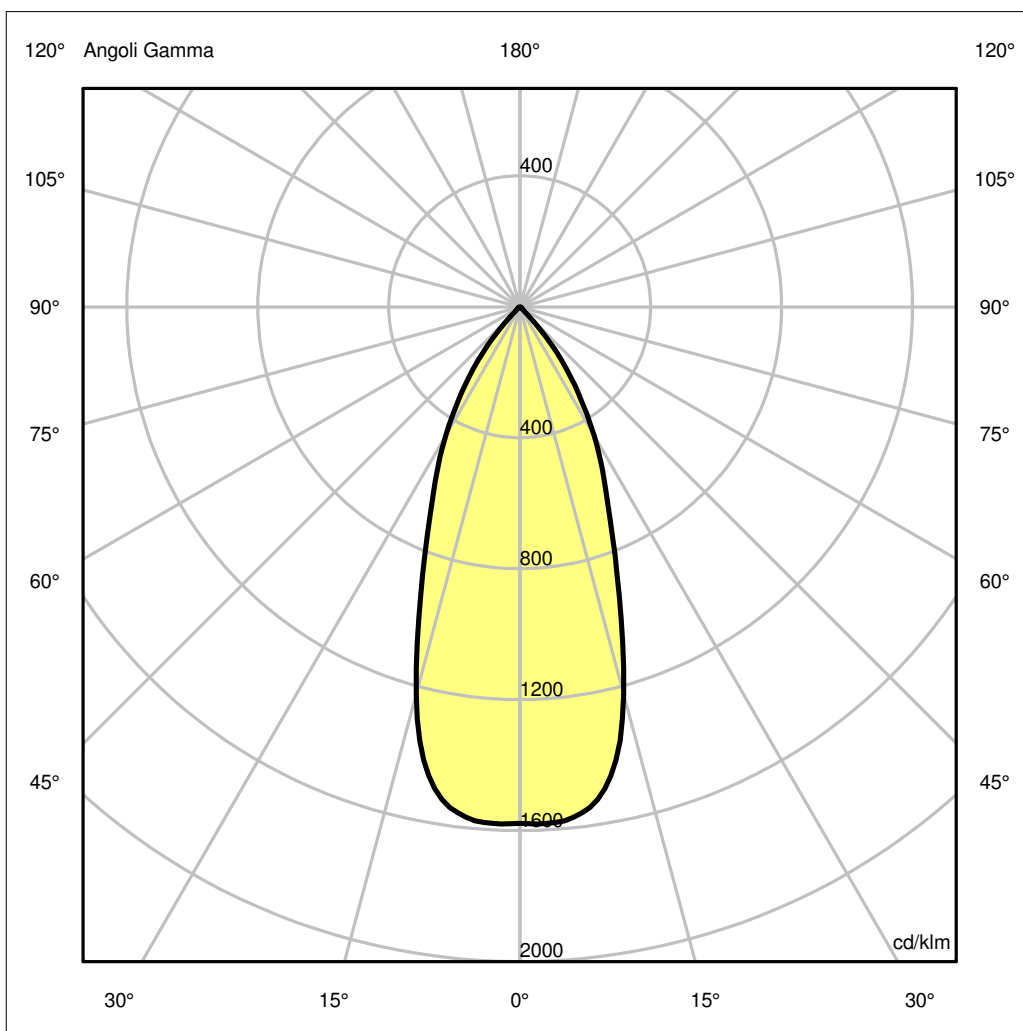

Luminaire


Code AD07201
 Name Picto 70 NEWTK New led Orizzontale DIM Bianco 3000K wide flood
Measurement.
 Code FTS1800056
 Name Picto 70 NEWTK New led Orizzontale DIM Bianco 3000K wide flood

Luminaire Flux	1779.82 lm	Luminaire Power	20.00 W	Efficacy	88.99 lm/W	Efficiency	100.00%
Lamps Flux	1779.82 lm	Maximum value	1580.38 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	70 mm 35 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.000962 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000233 m2	
Coordinate system Date Measurement Distance		CG 29-08-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1779.82 lm	
LED Flux=2046lm LED Power=17,5W Eff=86,99% EfcLed=117lm/W EfcLum=89lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E. F UTE	97 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.39	0.78	1.17	1.57	1.96	OC	0.39	0.78	1.17	1.57	1.96
OB	0.39	0.78	1.17	1.57	1.96	OD	0.39	0.78	1.17	1.57	1.96

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2807.68	2803.81	2178.74	1110.53	521.70	53.64	10.21	5.19	3.20	1.36
OB	2807.68	2803.81	2178.74	1110.53	521.70	53.64	10.21	5.19	3.20	1.36
OC	2807.68	2803.81	2178.74	1110.53	521.70	53.64	10.21	5.19	3.20	1.36
OD	2807.68	2803.81	2178.74	1110.53	521.70	53.64	10.21	5.19	3.20	1.36

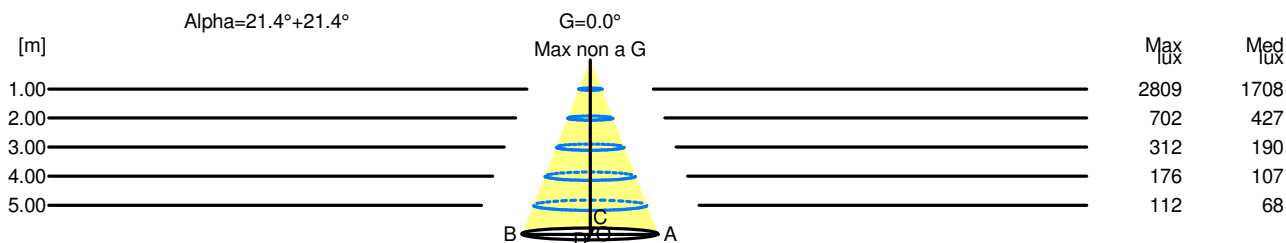

H[m]	D[m]	Max lux	Med lux	Alpha=21.4°+21.4°	G=0.0°	Max non a G
1.00	0.78	2809	1708			
2.00	1.57	702	427			
3.00	2.35	312	190			
4.00	3.13	176	107			
5.00	3.91	112	68			