

## Luminaire


Code AD05501  
Name Picto 70 NEWTK New led Orizzontale N/D Bianco 4000K wide flood

## Measurem.

Code FTS1800046  
Name Picto 70 NEWTK New led Orizzontale N/D Bianco 4000K wide flood

Luminaire Flux	1833.75 lm	Luminaire Power	20.00 W	Efficacy	91.69 lm/W	Efficiency	100.00%
Lamps Flux	1833.75 lm	Maximum value	1580.38 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 70 mm Diam. 35 mm	Height 100 mm Height 0 mm					
Horizontal Luminous Area	0.000962 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.000233 m2
Coordinate system	CG	Symmetry Type	Maximum Gamma Angle	Measurement Flux	180	1833.75 lm	
Date	29-08-2017						
Measurement Distance	0.00						
LED Flux=2108lm LED Power=17,5W Eff=86,99% EfcLed=120lm/W EfcLum=92lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	97 99 100 100 100	D DIN 5040	A60				
F UTE	1.00 A	B NBN	BZ 1				


Diam=70mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR100.00 %  
RN 0.00 %

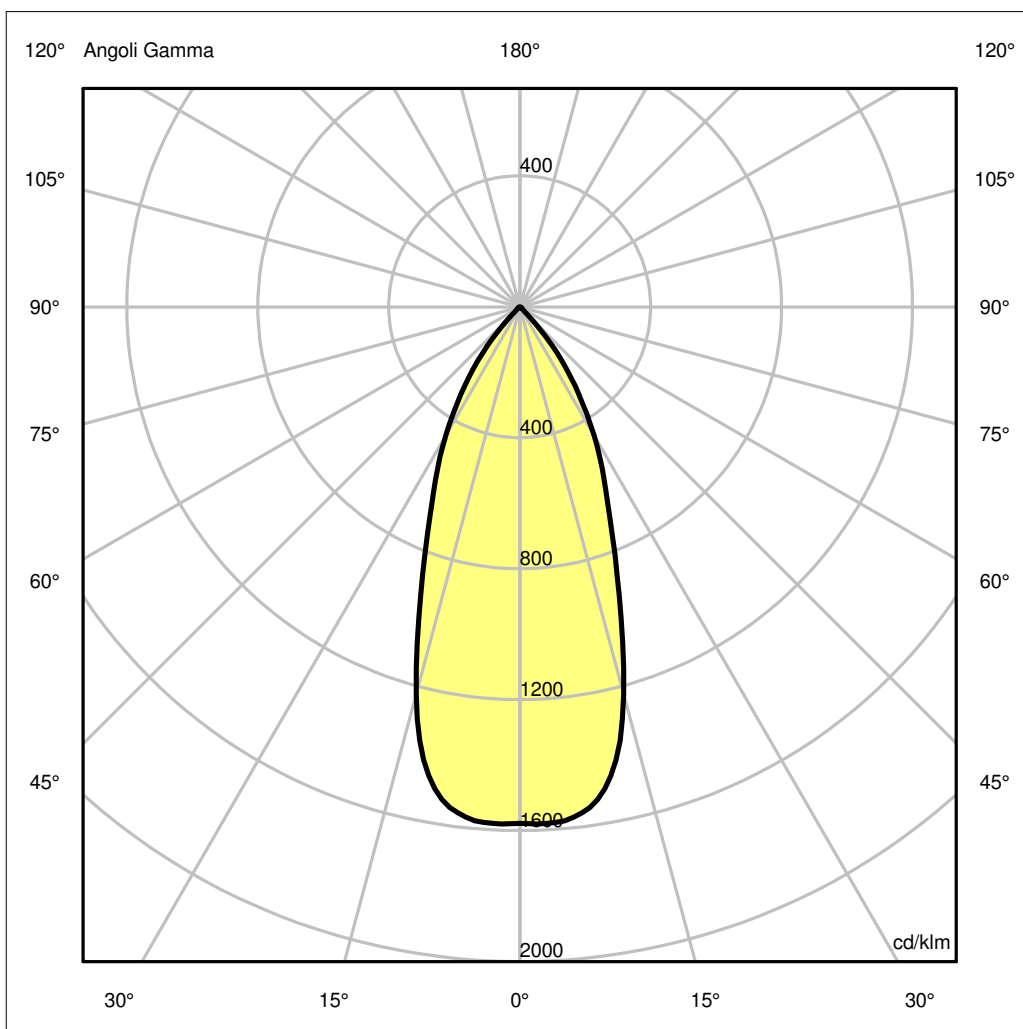

## Luminaire


Code AD05501  
 Name Picto 70 NEWTK New led Orizzontale N/D Bianco 4000K wide flood  
**Measurem.**  
 Code FTS1800046  
 Name Picto 70 NEWTK New led Orizzontale N/D Bianco 4000K wide flood

Luminaire Flux	1833.75 lm	Luminaire Power	20.00 W	Efficacy	91.69 lm/W	Efficiency	100.00%
Lamps Flux	1833.75 lm	Maximum value	1580.38 cd/klm	Position	C=0.00 G=2.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	70 mm 35 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.000962 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000233 m2	
Coordinate system Date Measurement Distance		CG 29-08-2017 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1833.75 lm	
LED Flux=2108lm LED Power=17,5W Eff=86,99% EfcLed=120lm/W EfcLum=92lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E. F UTE	97 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.39	0.78	1.17	1.57	1.96	OC	0.39	0.78	1.17	1.57	1.96
OB	0.39	0.78	1.17	1.57	1.96	OD	0.39	0.78	1.17	1.57	1.96

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2892.75	2888.77	2244.76	1144.18	537.51	55.26	10.52	5.35	3.30	1.40
OB	2892.75	2888.77	2244.76	1144.18	537.51	55.26	10.52	5.35	3.30	1.40
OC	2892.75	2888.77	2244.76	1144.18	537.51	55.26	10.52	5.35	3.30	1.40
OD	2892.75	2888.77	2244.76	1144.18	537.51	55.26	10.52	5.35	3.30	1.40

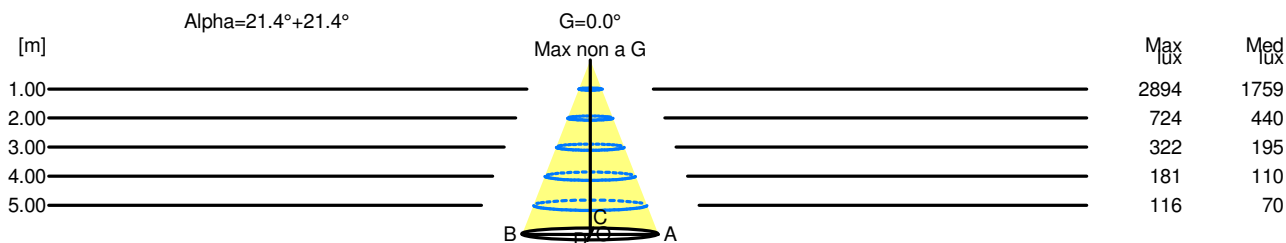

H[m]	D[m]	Max lux	Med lux	Alpha=21.4°+21.4°	G=0.0 Max non a G
1.00	0.78	2894	1759		
2.00	1.57	724	440		
3.00	2.35	322	195		
4.00	3.13	181	110		
5.00	3.91	116	70		