


## Luminaire

Code AD13304  
Name PICTO 100 NEWTK New led Verticale DIM Nero 3000K very wide flood  
**Measurem.**  
Code FTS1800087  
Name PICTO 100 NEWTK New led Verticale DIM Nero 3000K very wide flood

Luminaire Flux	2835.80 lm	Luminaire Power	35.00 W	Efficacy	81.02 lm/W	Efficiency	100.00%
Lamps Flux	2835.80 lm	Maximum value	995.88 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 100 mm Diam. 80 mm	Height 100 mm Height 0 mm					
Horizontal Luminous Area	0.005027 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001216 m2
Coordinate system	CG	Symmetry Type	Maximum Gamma Angle	Measurement Flux	180	2835.80 lm	
Date	20-04-2017						
Measurement Distance	0.00						
LED Flux=3501lm LED Power=31W Eff=81% EfcLed=113lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	84 94 99 100 100	D DIN 5040	A60				
F UTE	1.00 A	B NBN	BZ 1				

Diam=100mm




Semipiani C

180.0 — 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

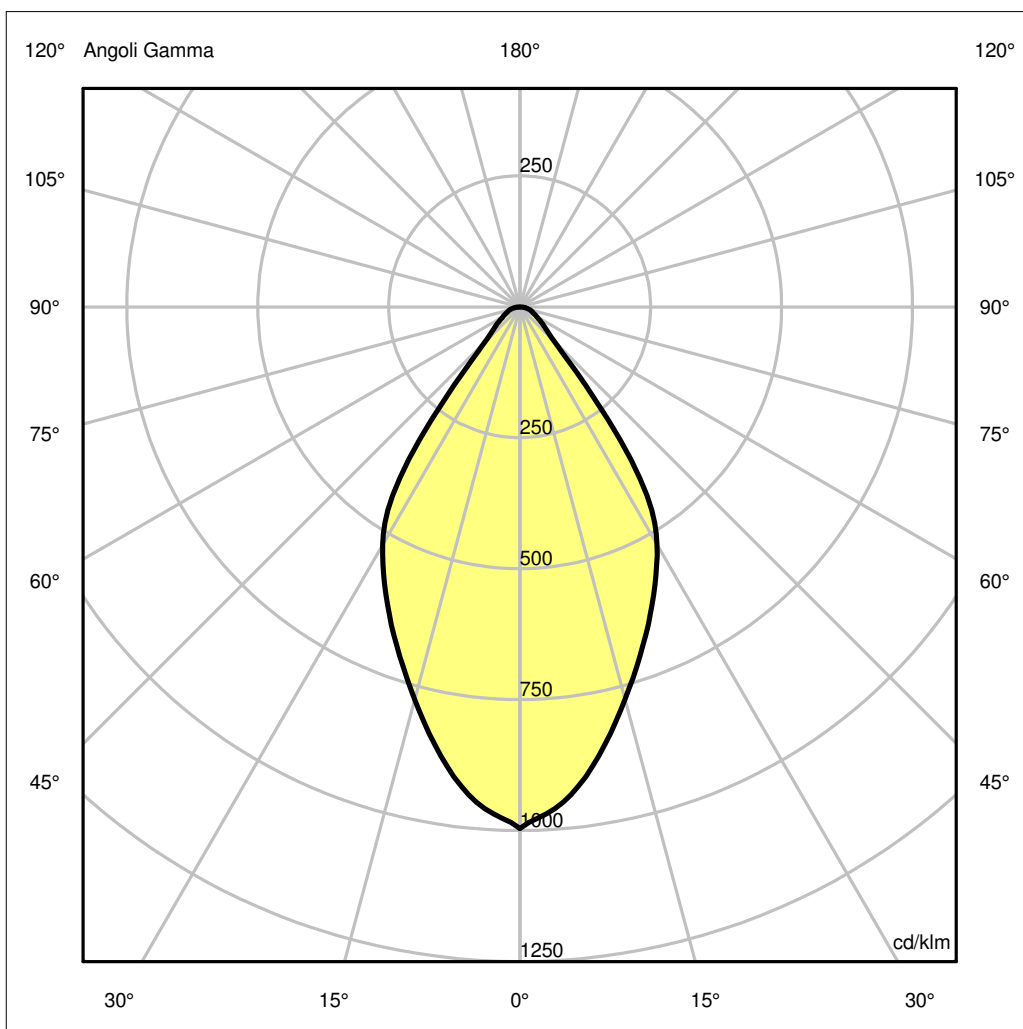

## Luminaire


Code AD13304  
Name PICTO 100 NEWTK New led Verticale DIM Nero 3000K very wide flood  
**Measur.**  
Code FTS1800087  
Name PICTO 100 NEWTK New led Verticale DIM Nero 3000K very wide flood

Luminaire Flux	2835.80 lm	Luminaire Power	35.00 W	Efficacy	81.02 lm/W	Efficiency	100.00%
Lamps Flux	2835.80 lm	Maximum value	995.88 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 80 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2835.80 lm	
LED Flux=3501lm LED Power=31W Eff=81% EfcLed=113lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	84 94 99 100 100			D DIN 5040		A60	
F UTE	1.00 A			B NBN		BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.61	1.22	1.83	2.44	3.05	OC	0.61	1.22	1.83	2.44	3.05
OB	0.61	1.22	1.83	2.44	3.05	OD	0.61	1.22	1.83	2.44	3.05

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2824.11	2691.77	2200.00	1716.06	1134.21	264.17	139.32	82.61	55.06	15.96
OB	2824.11	2691.77	2200.00	1716.06	1134.21	264.17	139.32	82.61	55.06	15.96
OC	2824.11	2691.77	2200.00	1716.06	1134.21	264.17	139.32	82.61	55.06	15.96
OD	2824.11	2691.77	2200.00	1716.06	1134.21	264.17	139.32	82.61	55.06	15.96

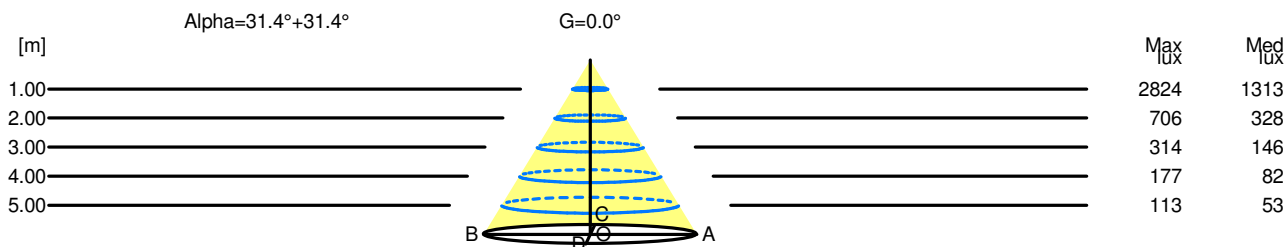

H[m]	D[m]	Max lux	Med lux	Alpha=31.4°+31.4°	G=0.0	
1.00	1.22	2824	1313			
2.00	2.44	706	328			
3.00	3.67	314	146			
4.00	4.89	177	82			
5.00	6.11	113	53			